

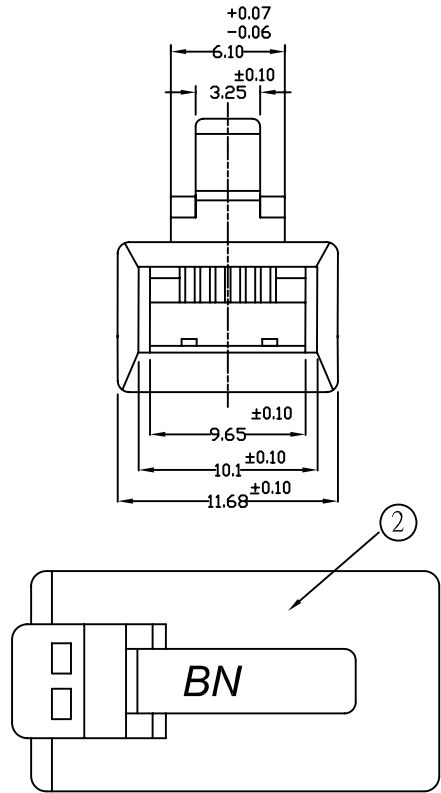
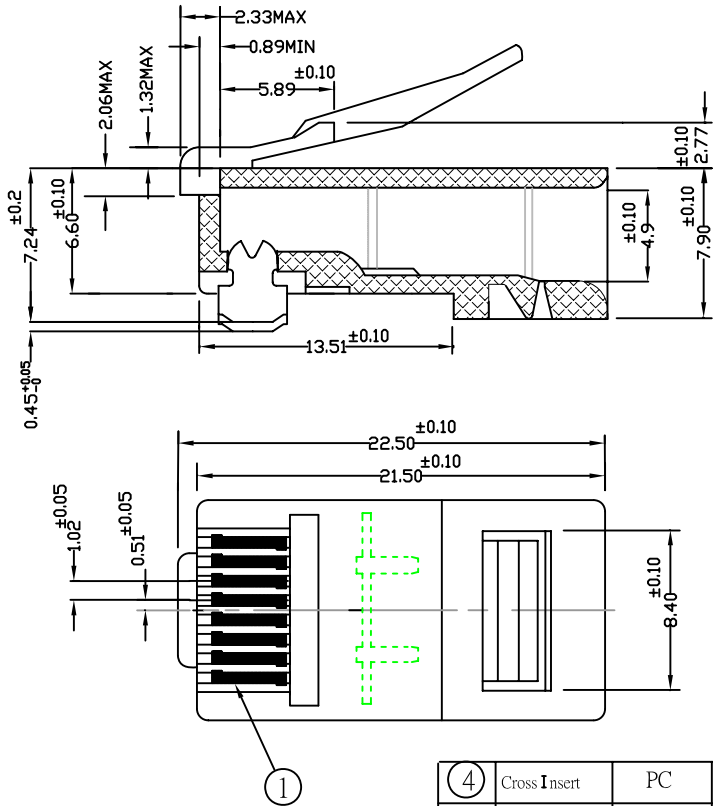
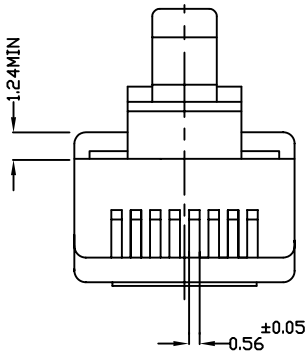


8P8C-6  
MODULAR CONNECTOR RJ45 8P8C CAT6

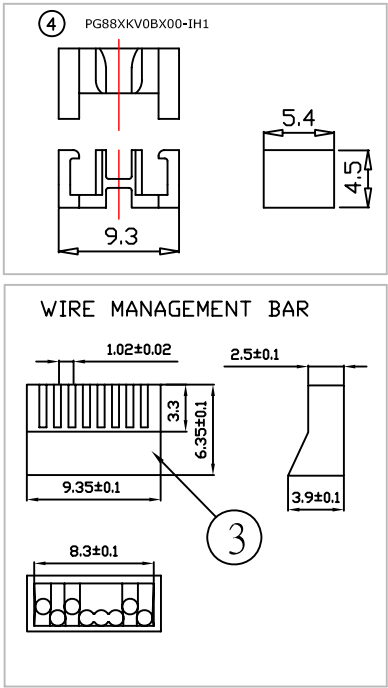

SPECIFICATION:

- 1.MATERIAL:  
HOUSING PLASTIC:POLYCARBONATE UL94-V0 or 94-V2  
CONTACT Pin: PHOSPHOROUS BRONZE,GOLD PLATE OVER NICKEL
- 2.ELECTRICAL:  
CURRENT RATING:1.5 AMPS,  
VOLTAGE RATING:250 VOLTS AC MAX,  
CONTACT RESISTANCE:30 MILLIOHM MAX,  
INSULATION RESISTANCE:500 MEGOHM MIN,  
DIELECTRIC WITHSTANDING VOLTAGE:1000V AC FOR 1 MINUTE
- 3.MECHANICAL:  
WORKING TEMPERATURE:-25~55° C  
DURABILITY:1000 MATING CYCLES MIN  
TENSILE STRENGTH BETWEEN PLUG AND JACK IS HIGHER THAN 7.7kgf

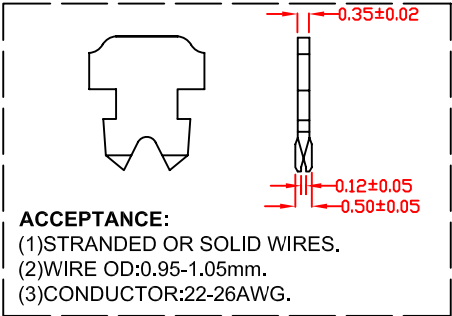

|       |              |          |                     |                     |                  |
|-------|--------------|----------|---------------------|---------------------|------------------|
| ④     | Cross Insert | PC       | 8P                  | 1                   | PG88XKV0BX00-IH1 |
| ③     | Insert       | PC       | 1' 3' 7' Low Insert | 1                   | PG88XKV00Xf0-IH2 |
| ②     | Housing      | PC       | 8P8C                | 1                   | PH88XgV0BXf0-01  |
| ①     | Contact Pin  | Cu       | High low PIN        | 3                   | GP16XXX          |
|       |              |          |                     | 5                   | GP13XXX          |
| No.   | Name         | Material | Specification       | QTY'                | Drawing          |
| APPD. |              |          | P/N.                | PG88XgV0BXf0-01-G   |                  |
| CHKD. |              |          | FILE                | PG88XgV0BXf0-01.DWG |                  |
| DR.   |              |          | TITLE               | UTP CAT.6 PLUG      |                  |