

ROTARY SWITCH



SR26 Series

Application

- ✓ TV/Video, Audio, Home appliance, Precision apparatus,
Automotive, Musical instruments, Industrial control, Others

Feature

- ✓ Up to 12 positions general use rotary switches with optional plastic shafts.



■Specification

Rating	125V AC 0.3A
Withstand Voltage	500V AC - 1 minute
Contact Resistance	50 mΩ Max.
Insulation Resistance	500V DC - 100MΩ Min.
Rotational Torque	0.5 ± 0.2 kgf.cm
Operating Life Cycle	10,000 cycles

■How to order

SR2612F – 0102 – 15F5B – D8 – S

[Model](#)

Number of Pole & Position
Ex. 0102 – 1 pole 2 positions
0402 – 4 poles 2 positions

[Shaft Type](#)

Timing

Order Code	Description
S	Shorting (make-before-break)
N	Non-shorting (break-before-make)

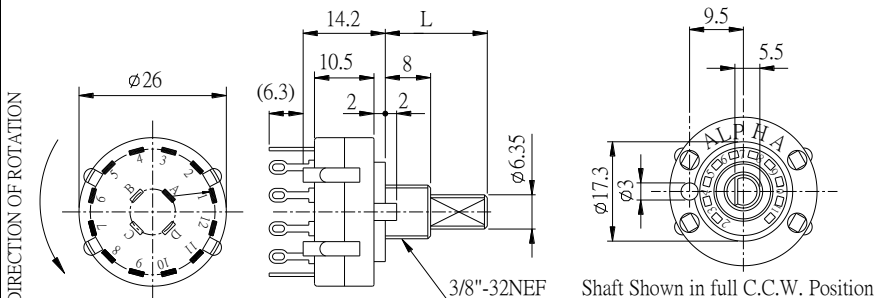
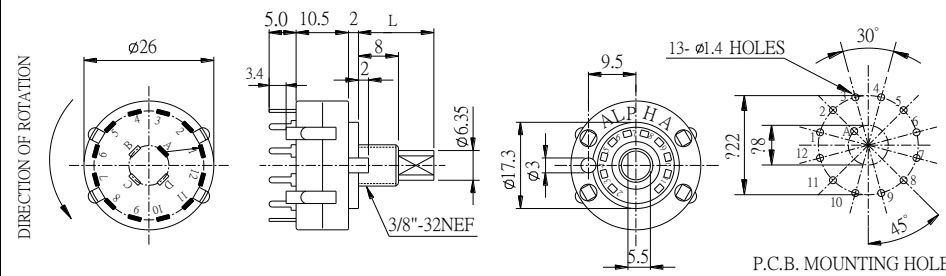
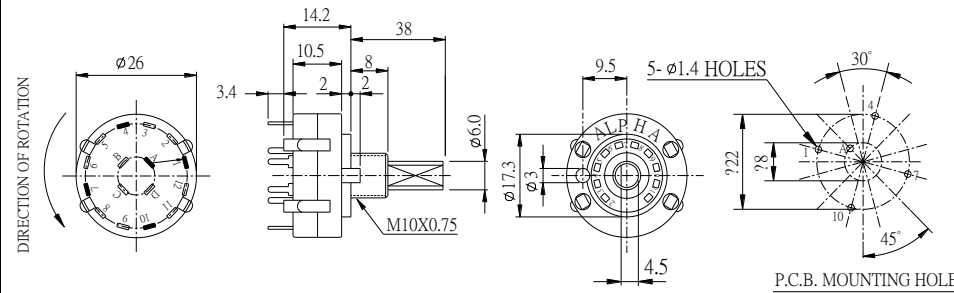
Bushing Type

Order Code	Bushing Length	Bushing Diameter
D1	8mm	M10*0.75
D8	8mm	3/8"- 32NEF

SR26 Series

Model Description

Model	Terminal Type	Pole	Position	Changeover Angle	Timing
SR2611F	Soldering	1	2~12	30°	Shorting/ Non-shorting
		2	2~6		
		3	2~4		
		4	2~3		
SR2612F	PCB	1	2~12	30°	Shorting/ Non-shorting
		2	2~6		
		3	2~4		
		4	2~3		
SR2613F	PCB	1	2~4	90°	

Order Code	Outline Drawing
SR2611F-□□-(L)F5B-D8-S 	 Shaft Shown in full C.C.W. Position
SR2612F-□□-(L)F5B-D8-S 	 P.C.B. MOUNTING HOLE
SR2613F-□□-(L)F5A-D1-N 	 P.C.B. MOUNTING HOLE

CHANGEOVER ANGLE=60° IS ALSO AVAILABLE UPON REQUEST

■ Shaft Type

LR0A			LR0B		
	L			L	
	15			L	
	18			L	
	38			L	
LK0A			LF6A (270°)		
	L			L	
	33.5			20	
LF5A (90°)			LF5B (90°)		
	L	A		L	
	16	4.5		L	
	17	5.0		L	
	20	4.6		L	
	24	5.0		L	
LS0B			LS5B		
	L			L	T
	14.5			23	1.3
8S0B			8S5B		
	L			L	
	8			8	