

D-SUB H.D. RIGHT ANGLE TYPE

Specifications:

Contact Resistance: 30mΩmax.at DC 100mA

Insulator Resistance: 1000MΩmin.at DC 500V

Current Rating: 3 AMP





Dielectric Withstanding

Voltage: AC 1000V For 1 minute

Operating Temperature: -55°C ~ +105°C

Contact: Brass or Phosphor Bronze

Housing: PBT & 30% Glass Fiber (UL 94V-O)

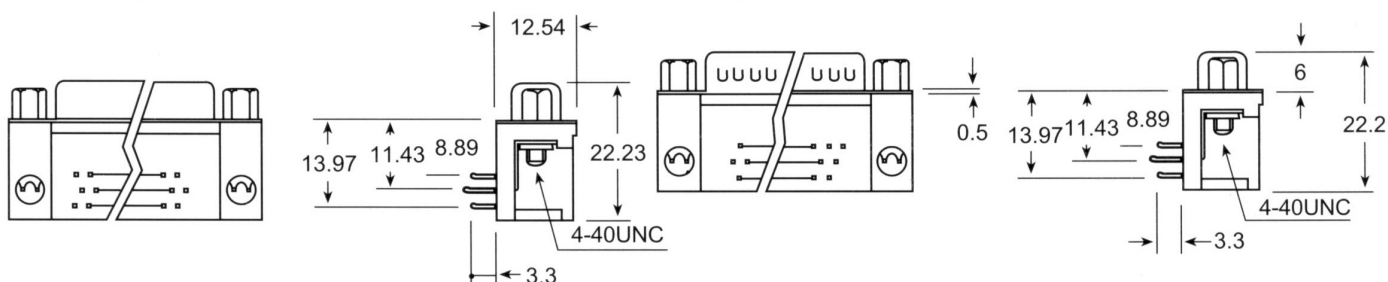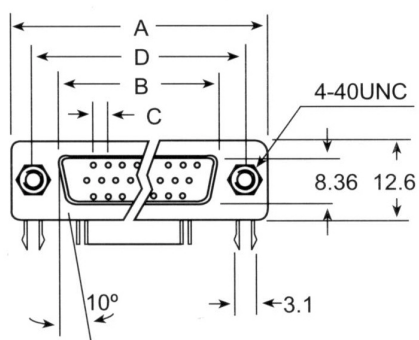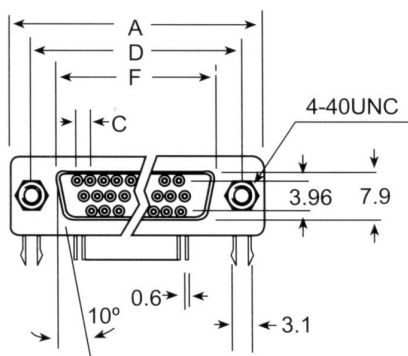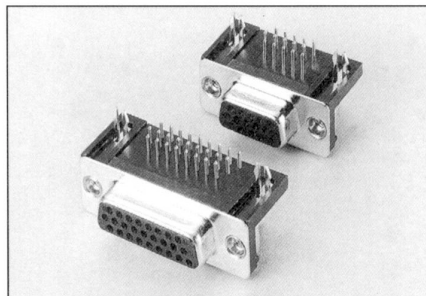

Dimension

Position	Dimension				
	A	B	C	D	E
15	16.3	0.25	2.29	24.99	30.8
26	24.7	0.51	2.29	33.32	39.1
44	38.4	0.51	2.29	47.04	53.0
62	54.8	0.58	2.41	63.50	69.3