



# PIN HEADER 2.54mm (0.100")

**Specifications:**

Contact Resistance: 30mΩmax.at DC 100mA  
Insulator Resistance: 1000MΩmin.at DC 500V  
Current Rating: 1 AMP

**Dielectric Withstanding**

Voltage: AC 500V For 1 minute  
Operating Temperature: -55°C ~ +105°C  
Contact: Brass  
Housing: PBT & 30% Glass Fiber (UL 94V-O)

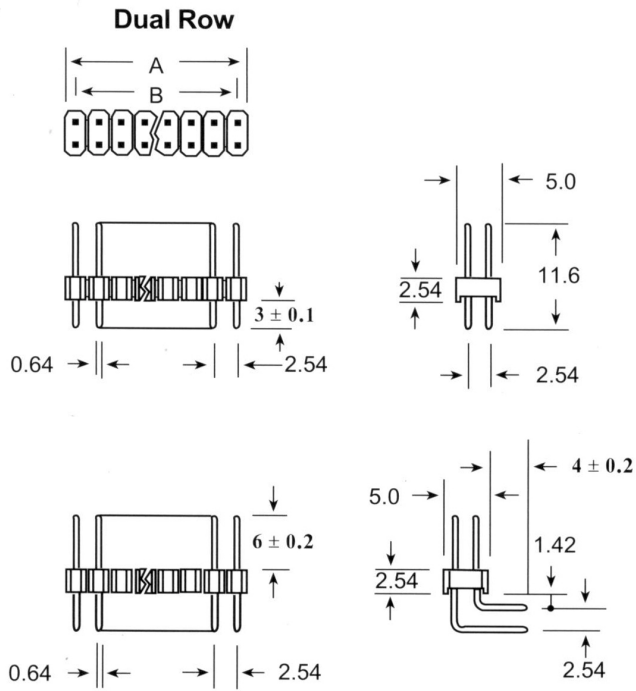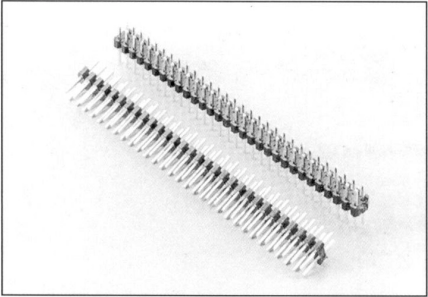

|           |                        |
|-----------|------------------------|
| Position  | 2 Thru 40              |
| Dimension | 4 Thru 80              |
| A         | 2.54*Position No.      |
| B         | 2.54*Position No.-2.54 |