




BOX HEADER 2.54mm (0.100")

Specifications:


Contact Resistance: 30mΩmax.at DC 100mA
Insulator Resistance: 1000MΩmin.at DC 500V
Current Rating: 1 AMP

Dielectric Withstanding

Voltage: AC 500V For 1 minute
Operating Temperature: -55°C ~ +105°C
Contact: Brass
Housing: PBT & 30% Glass Fiber (UL 94V-O)

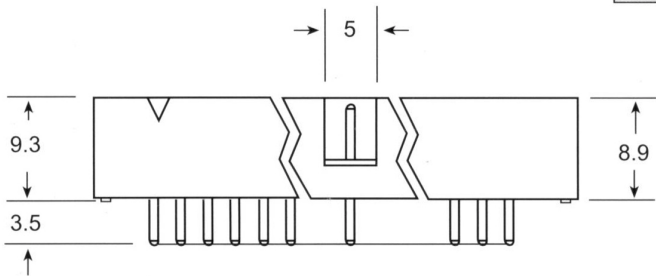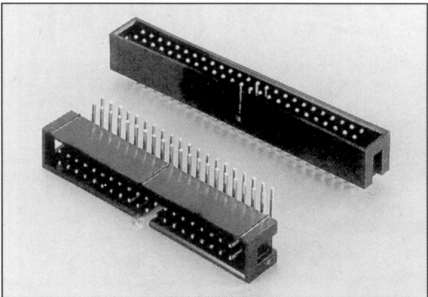

Straight

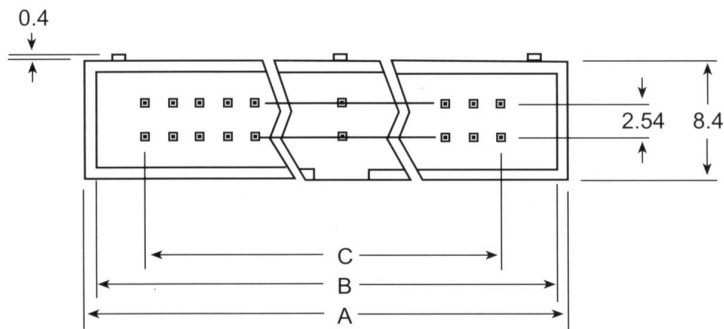

Dimension

Position	A	B	C
10	20.30	18.10	10.16
12	22.84	20.64	12.70
14	25.38	23.18	15.24
16	27.92	25.72	17.78
20	33.00	30.80	22.86
26	40.62	38.42	30.48
30	45.70	43.50	35.56
34	50.78	48.58	40.64
40	58.40	56.20	48.26
50	71.10	68.90	60.96
60	83.80	81.60	73.66
64	88.88	86.68	78.74