










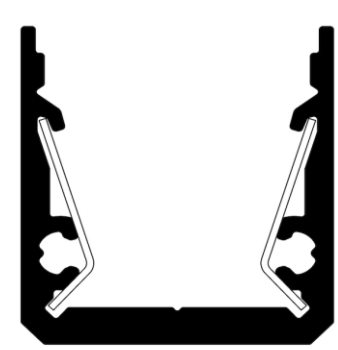
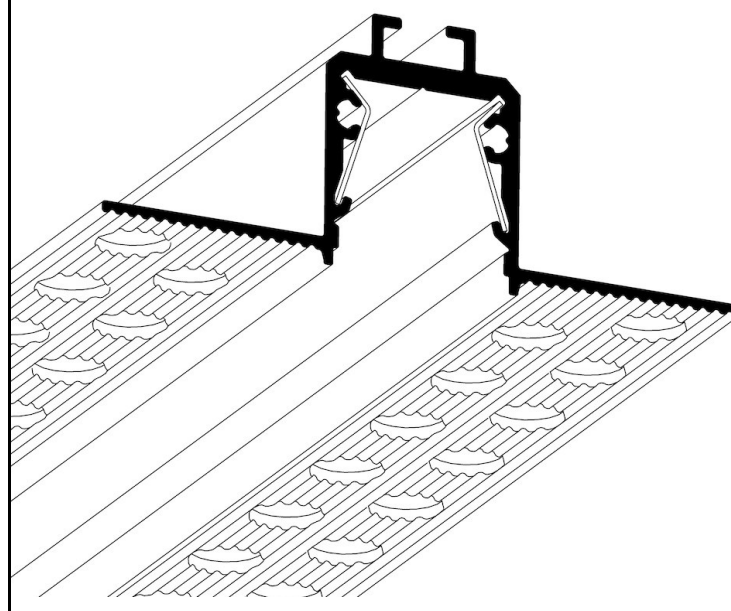
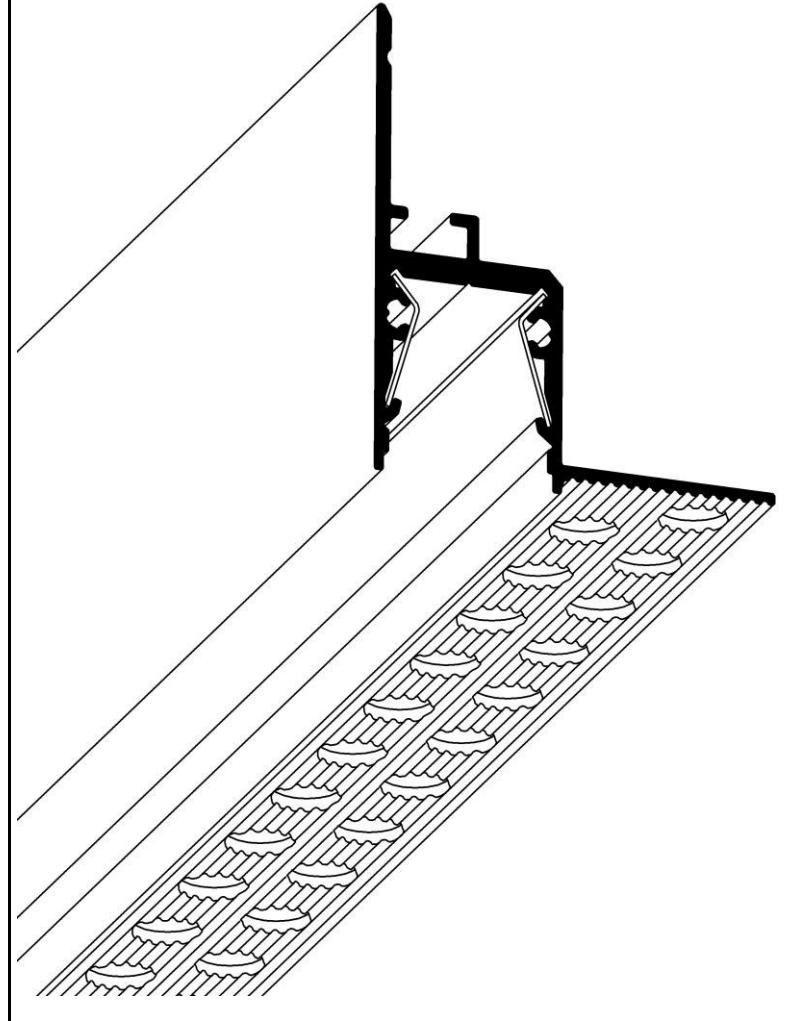








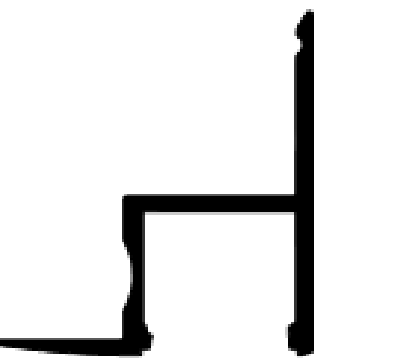

<div><div>Complete product selection process =</div><div><div>1. Select profile type and length</div><div>2. Select type of corresponding diffuser/lens</div><div>3. Select dedicated accessories</div></div></div> <div><div>AL - SLW8 - 1/2/3</div><div>product group profile type profile length</div></div> <div><div>product group</div><div><div>AL - ALUMINUM PROFILE</div><div>AB - DIFFUSER/LENS</div><div>MC - MOUNTING BRACKET</div><div>EC - FINISH END CAP</div><div>GA - ISOLATION SILICONE GASKET</div><div>RU - ANTI SLIP RUBBER</div><div>LC - LINEAR CONNECTOR</div></div></div> <div><div>LEDs-ON™</div><div>www.ledson.eu</div></div>						
Item	Product code	Description	Dimmension	Material	Color	diffuser/lens type
	AL-SL7-2	Led profile SlimLine 7mm	2m	anodized aluminum	silver	no diffuser, needs to be chosen from below list,
	AL-SL7-3	Led profile SlimLine 7mm	3m	anodized aluminum	silver	no diffuser, needs to be chosen from below list,
	AL-SL7-6.1	Led profile SlimLine 7mm for future customer customize cut	6,1m	anodized aluminum	silver	no diffuser, needs to be chosen from below list,
	AL-SL7B-6.1	Led profile SlimLine 7mm, anodized in BLACK , for future customer customize cut	6,1m	anodized aluminum	black	no diffuser, needs to be chosen from below list,
	EC-SL7-H1	ABS end cap for SlimLine 7mm LED profile without cable hole	pcs	ABS	grey	promotion, valid till the end of the stock
	EC-SL7-H2	ABS end cap for SlimLine 7mm LED profile with cable hole	pcs	ABS	grey	promotion, valid till the end of the stock
	EC-SL7-H3	Aluminum end cap for SlimLine 7mm LED profile w/out cable hole	pcs	aluminum	silver	new, replace the ABS end caps
	EC-SL7-H4	Aluminum end cap for SlimLine 7mm LED profile with cable hole	pcs	aluminum	silver	new, replace the ABS end caps
	MC-SL7-STEEL	Stainless steel mounting bracket for SlimLine 7mm LED profile, RAW material	pcs	stainless steel	RAW/silver	new, replace the ABS mounting bracket
	MC-SL7-STEEL-B	new, Stainless steel mounting bracket for SlimLine 7mm LED profile in BLACK	pcs	stainless steel	black	new, stainless steel mounting bracket in black, powder coat painted
	MC-SL7	Mounting bracket for SlimLine 7mm LED profile	pcs	ABS	grey	promotion, valid till the end of the stock
	MC-SL7-MAG	new, Magnetic mounting bracket for SlimLine 7mm LED profile	pcs	spring steel	silver	new, magnetic holding clip for SL7 profile
	LC-SL7	Linear connector for SlimLine 7mm LED profile	pcs	ABS	grey	-
	EC-30SL7-H1	Aluminum end cap for SL7 LED profile with 30° degree optic lens w/out cable hole	pcs	aluminum	silver	-
	EC-30SL7-H2	Aluminum end cap for SL7 LED profile with 30° degree optic lens with cable hole	pcs	aluminum	silver	-
	EC-60SL7-H1	Aluminum end cap for SL7 LED profile with 60° degree optic lens w/out cable hole	pcs	aluminum	silver	-
	EC-60SL7-H2	Aluminum end cap for SL7 LED profile with 60° degree optic lens with cable hole	pcs	aluminum	silver	-
	CUT-1	Quality 45/90/125 degree cut service	pcs	cut	profil/diffuser	extra service (option)
	MIL-1	Quality milling service	pcs	mill	profil	extra service (option)
	DRIL-1	Quality drilling service	pcs	dril	profil	extra service (option)
RSL7-7,9x24,5mm						
	AL-RSL7-2	Recessed SlimLine 7mm	2m	anodized aluminum	silver	no diffuser, needs to be chosen from below list,
	AL-RSL7-3	Recessed SlimLine 7mm	3m	anodized aluminum	silver	no diffuser, needs to be chosen from below list,
	AL-RSL7-6.1	Recessed SlimLine 7mm, for future customer customize cut	6,1m	anodized aluminum	silver	no diffuser, needs to be chosen from below list,
	EC-RSL7-H3	Aluminum end cap for Recessed SlimLine 7mm LED profile w/out cable hole	pcs	aluminum	silver	-
	EC-RSL7-H4	Aluminum end cap for Recessed SlimLine 7mm LED profile with cable hole	pcs	aluminum	silver	-
	CUT-1	Quality 45/90/125 degree cut service	pcs	cut	profil/diffuser	extra service (option)
	MIL-1	Quality milling service	pcs	mill	profil	extra service (option)
	DRIL-1	Quality drilling service	pcs	dril	profil	extra service (option)
RSL7-7,9x24,5mm						
	AL-SL15-2	SlimLine 15mm, anodized in silver, aluminum LED profile	2m	anodized aluminum	silver	no diffuser, needs to be chosen from below list,
	AL-SL15-3	SlimLine 15mm, anodized in silver, aluminum LED profile	3m	anodized aluminum	silver	no diffuser, needs to be chosen from below list,
	AL-SL15-3 RAL	SlimLine 15mm, aluminum LED profile in white RAL9003	3m	aluminum	RAL9003	no diffuser, needs to be chosen from below list,
	AL-SL15-6.1	SlimLine 15mm, anodized in silver, aluminum LED profile	6,1m	anodized aluminum	silver	no diffuser, needs to be chosen from below list,
	AL-SL15B-6.1	SlimLine 15mm, anodized in BLACK , aluminum LED profile	6,1m	anodized aluminum	black	no diffuser, needs to be chosen from below list,
	MC-CAB-1,6	Steel suspension cable 1,6m long with anchor, set of two	set	aluminum/steel	silver	set of two
	EC-SL15-H1	ABS end cap for SlimLine 15mm w/out cable hole	pcs	ABS	grey	promotion, price valid till the end of the stock
	EC-SL15-H2	ABS end cap for SlimLine 15mm with cable hole	pcs	ABS	grey	promotion, price valid till the end of the stock
	EC-SL15-H3	Aluminum end cap for SlimLine 15mm LED profile without cable hole	pcs	aluminum	silver	aluminum end cap
	EC-SL15-H4	Aluminum end cap for SlimLine 15mm LED profile with cable hole	pcs	aluminum	silver	aluminum end cap
	EC-SL15-H3 RAL	Aluminum end cap for SlimLine 15mm LED profile w/out cable hole, in white RAL9003	pcs	aluminum	RAL9003	aluminum end cap
	EC-SL15-H4 RAL	Aluminum end cap for SlimLine 15mm LED profile with cable hole, in white RAL9003	pcs	aluminum	RAL9003	aluminum end cap
	MC-SL15-STEEL	Stainless steel, spring mounting bracket for SlimLine 15mm LED profile, RAW material	pcs	stainless steel	RAW/silver	new, stainless steel mounting bracket, RAW material
	MC-SL15-STEEL-B	new, Stainless steel mounting bracket for SlimLine 7mm LED profile in BLACK	pcs	stainless steel	black	new, stainless steel mounting bracket in black, powder coat painted
	MC-SL15	ABS mounting bracket for SlimLine 15mm LED profile	pcs	ABS	grey	promotion, valid till the end of the stock
	MC-SL15-MAG	new, Magnetic mounting bracket for SlimLine 15mm LED profile	pcs	spring steel	silver	new, magnetic holding clip for SL15 profile
	LC-SL15	ABS liner connector for SlimLine 15mm LED profile	pcs	ABS	grey	-
	EC-30SL15-H1	Aluminum end cap for SL15 LED profile with 30 degree optic lens w/out cable hole	pcs	aluminum	silver	-
	EC-30SL15-H2	Aluminum end cap for SL15 LED profile with 30 degree optic lens with cable hole	pcs	aluminum	silver	-
	EC-60SL15-H3	Aluminum end cap for SL15 LED profile with 60 degree optic lens w/out cable hole	pcs	aluminum	silver	-
	EC-60SL15-H4	Aluminum end cap for SL15 LED profile with 60 degree optic lens with cable hole	pcs	aluminum	silver	-
	CUT-1	Quality 45/90/125 degree cut service	pcs	cut	profil/diffuser	extra service (option)
	MIL-1	Quality milling service	pcs	mill	profil	extra service (option)
	DRIL-1	Quality drilling service	pcs	dril	profil	extra service (option)
SL15-15,9x17,5mm						
	AL-RSL15-2	Recessed SlimLine 15mm, anodized in silver, aluminum LED profile	2m	anodized aluminum	silver	no diffuser, needs to be chosen from below list
	AL-RSL15-3	Recessed SlimLine 15mm, anodized in silver, aluminum LED profile	3m	anodized aluminum	silver	no diffuser, needs to be chosen from below list
	AL-RSL15-6.1	Recessed SlimLine 15mm, anodized in silver, aluminum LED profile	6,1m	anodized aluminum	silver	no diffuser, needs to be chosen from below list
	EC-RSL15-H3	Aluminum end cap for Recessed SlimLine 15mm LED profile w/out cable hole	pcs	aluminum	silver	-
	EC-RSL15-H4	Aluminum end cap for Recessed SlimLine 15mm LED profile with cable hole	pcs	aluminum	silver	-
	CUT-1	Quality 45/90/125 degree cut service	pcs	cut	profil/diffuser	extra service (option)
	MIL-1	Quality milling service	pcs	mill	profil	extra service (option)
	DRIL-1	Quality drilling service	pcs	dril	profil	extra service (option)
RSL15-16x24,5mm						

Item	Product code	Description	Dimmension	Material	Color	diffuser/lens type
 ALU-45-18,7x26,2mm	AL-D2-2	ALU-45, anodized in silver, aluminum LED profile	2m	anodized aluminum	silver	no diffuser, needs to be chosen from below list,
	AL-D2-3	ALU-45, anodized in silver, aluminum LED profile	3m	anodized aluminum	silver	no diffuser, needs to be chosen from below list,
	AL-D2-6.1	ALU-45, anodized in silver, aluminum LED profile for future customer customize cut	6,1m	anodized aluminum	silver	no diffuser, needs to be chosen from below list,
	LC-D2	Aluminum linear connector for ALU-45 LED profile	pcs	aluminum	silver	-
	EC-D3	Aluminum end cap for ALU-45 LED profile w/out cable hole	pcs	aluminum	silver	-
	EC-D4	Aluminum end cap for ALU-45 LED profile with cable hole	pcs	aluminum	silver	-
	MC-D2 STEEL	Stainless steel, spring mounting bracket for ALU-45 LED profile	pcs	stainless steel	silver	-
	CUT-1	Quality 45/90/125 degree cut service	pcs	cut	profil/diffuser	extra service (option)
	MIL-1	Quality milling service	pcs	mill	profil	extra service (option)
	DRIL-1	Quality drilling service	pcs	dril	profil	extra service (option)
 CORNER-10x30,9mm	AL-E2-2	Led Profile ALU-Corner, anodized in silver aluminum LED profile	2m	anodized aluminum	silver	no diffuser, needs to be chosen from below list,
	AL-E2-6.1	Led Profile ALU-Corner, anodized in silver aluminum LED profile	6,1m	anodized aluminum	silver	no diffuser, needs to be chosen from below list,
	EC-E1	ABS end cap for ALU-Corner LED profile w/out cable hole	pcs	ABS	grey	-
	EC-E2	ABS end cap for ALU-Corner LED profile, with cable hole	pcs	ABS	grey	-
	MC-E2	Spring steel mounting bracket for ALU-Corner LED profile	pcs	spring steel	silver	-
	CUT-1	Quality 45/90/125 degree cut service	pcs	cut	profil/diffuser	extra service (option)
	MIL-1	Quality milling service	pcs	mill	profil	extra service (option)
	DRIL-1	Quality drilling service	pcs	dril	profil	extra service (option)
 FLAT-8,5x52,4mm	AL-FL-2	ALU-Flat, anodized in silver aluminum LED profile	2m	anodized aluminum	silver	no diffuser, needs to be chosen from below list,
	AL-FL-6.1	ALU-Flat, anodized in silver aluminum LED profile	6,1m	anodized aluminum	silver	no diffuser, needs to be chosen from below list,
	EC-FL1	ABS end cap for ALU-Flat w/out holding ears,w/out cable hole	pcs	ABS	grey	-
	EC-FL2	ABS end cap for ALU-Flat w/out holding ears, with cable hole	pcs	ABS	grey	-
	EC-FL3	ABS end cap for ALU-Flat with holding ears, w/out cable hole	pcs	ABS	grey	-
	EC-FL4	ABS end cap for ALU-Flat with holding ears, with cable hole	pcs	ABS	grey	-
	CUT-1	Quality 45/90/125 degree cut service	pcs	cut	profil/diffuser	extra service (option)
	MIL-1	Quality milling service	pcs	mill	profil	extra service (option)
	DRIL-1	Quality drilling service	pcs	dril	profil	extra service (option)
 STAIR-27,4x66,9mm	AL-ST-2	Alu-Stair, anodized in silver aluminum LED profile	2m	anodized aluminum	silver	no diffuser, needs to be chosen from below list,
	AL-ST-6.1	Alu-Stair, anodized in silver aluminum LED profile	6,1m	anodized aluminum	silver	no diffuser, needs to be chosen from below list,
	EC-ST-R	ABS end cap for ALU-Stair, right	pcs	ABS	grey	-
	EC-ST-L	ABS end cap for ALU-Stair, left	pcs	ABS	grey	-
	CUT-1	Quality 45/90/125 degree cut service	pcs	cut	profil/diffuser	extra service (option)
	MIL-1	Quality milling service	pcs	mill	profil	extra service (option)
	DRIL-1	Quality drilling service	pcs	dril	profil	extra service (option)
 ALU WALL -26,2x70mm	AL-WL-2	Alu-Wall, anodized in silver aluminum LED profile	2m	anodized aluminum	silver	no diffuser, needs to be chosen from below list,
	EC-WL-R	ABS end cap for ALU-Wall, with cable hole, right	pcs	ABS	grey	-
	EC-WL-L	ABS end cap for ALU-Wall, with cable hole, left	pcs	ABS	grey	-
	CUT-1	Quality 45/90/125 degree cut service	pcs	cut	profil/diffuser	extra service (option)
	MIL-1	Quality milling service	pcs	mill	profil	extra service (option)
	DRIL-1	Quality drilling service	pcs	dril	profil	extra service (option)
 DIFFUSER	AB-SL-K2	Diffuser for SL7, RSL7, SL15, RSL15, Alu-45, Alu-Corner, Alu-Flat, Alu-Stair, Alu-Wall	2m	polycarbonate UV-st.	clear/transparent	diffuser, certyfied UV stabilized material
	AB-SL-K3	Diffuser for SL7, RSL7, SL15, RSL15, Alu-45, Alu-Corner, Alu-Flat, Alu-Stair, Alu-Wall	3m	polycarbonate UV-st.	clear/transparent	diffuser, certyfied UV stabilized material
	AB-SL-K6.1	Diffuser for SL7, RSL7, SL15, RSL15, Alu-45, Alu-Corner, Alu-Flat, Alu-Stair, Alu-Wall	6,1m	polycarbonate UV-st.	clear/transparent	diffuser, certyfied UV stabilized material
	AB-SL-M2	Diffuser for SL7, RSL7, SL15, RSL15, Alu-45, Alu-Corner, Alu-Flat, Alu-Stair, Alu-Wall	2m	polycarbonate UV-st.	frosted/opal	diffuser, certyfied UV stabilized material
	AB-SL-M3	Diffuser for SL7, RSL7, SL15, RSL15, Alu-45, Alu-Corner, Alu-Flat, Alu-Stair, Alu-Wall	3m	polycarbonate UV-st.	frosted/opal	diffuser, certyfied UV stabilized material
	AB-SL-M6.1	Diffuser for SL7, RSL7, SL15, RSL15, Alu-45, Alu-Corner, Alu-Flat, Alu-Stair, Alu-Wall	6,1m	polycarbonate UV-st.	frosted/opal	diffuser, certyfied UV stabilized material
	AB-SL-50M2	Diffuser for SL7, RSL7, SL15, RSL15, Alu-45, Alu-Corner, Alu-Flat, Alu-Stair, Alu-Wall	2m	polycarbonate UV-st.	50% frosted/opal	diffuser, certyfied UV stabilized material
	AB-SL-50M3	Diffuser for SL7, RSL7, SL15, RSL15, Alu-45, Alu-Corner, Alu-Flat, Alu-Stair, Alu-Wall	3m	polycarbonate UV-st.	50% frosted/opal	diffuser, certyfied UV stabilized material
	AB-SL-50M6.1	Diffuser for SL7, RSL7, SL15, RSL15, Alu-45, Alu-Corner, Alu-Flat, Alu-Stair, Alu-Wall	6,1m	polycarbonate UV-st.	50% frosted/opal	diffuser, certyfied UV stabilized material
	AB-SL-B6.1	Diffuser for SL7, RSL7, SL15, RSL15, Alu-45, Alu-Corner, Alu-Flat, Alu-Stair, Alu-Wall	6,1m	polycarbonate UV-st.	black/opal	diffuser, certyfied UV stabilized material
 OPTIC LENSES	AB-SL7/SL15-L30K2	30 degree optic lens for the SL7, SL15 series profiles	2,02m	PMMA, UV-st.	transparent	optic lens, certyfied UV stabilized material
	AB-SL7/SL15-L30M2	30 degree optic lens for the SL7, SL15 series profiles	2,02m	PMMA, UV-st.	satin matt	optic lens, certyfied UV stabilized material
	AB-SL7/SL15-L30K3	30 degree optic lens for the SL7, SL15 series profiles	3,02m	PMMA, UV-st.	transparent	optic lens, certyfied UV stabilized material
	AB-SL7/SL15-L30M3	30 degree optic lens for the SL7, SL15 series profiles	3,02m	PMMA, UV-st.	satin matt	optic lens, certyfied UV stabilized material
	AB-SL7/SL15-L60K2	60 degree optic lens for the SL7, SL15 series profiles	2,02m	PMMA, UV-st.	transparent	optic lens, certyfied UV stabilized material
	AB-SL7/SL15-L60K3	61 degree optic lens for the SL7, SL15 series profiles	3,02m	PMMA, UV-st.	transparent	optic lens, certyfied UV stabilized material
	AB-SL7/SL15-L60M2	60 degree optic lens for the SL7, SL15 series profiles	2,02m	PMMA, UV-st.	satin matt	optic lens, certyfied UV stabilized material
	AB-SL7/SL15-L60M3	60 degree optic lens for the SL7, SL15 series profiles	3,02m	PMMA, UV-st.	satin matt	optic lens, certyfied UV stabilized material

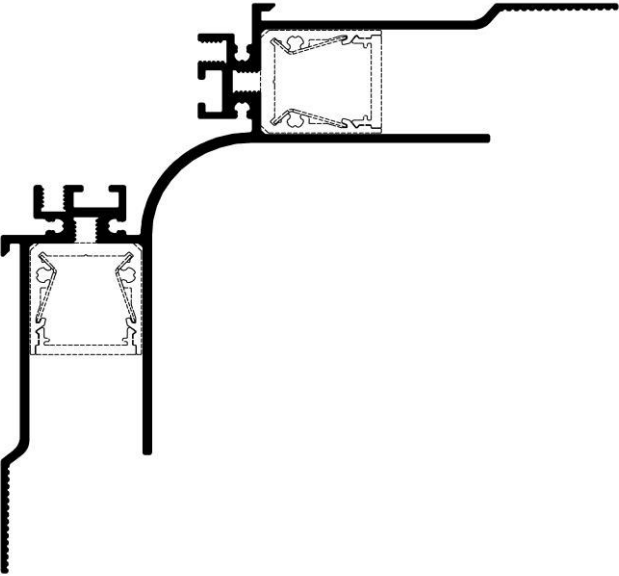

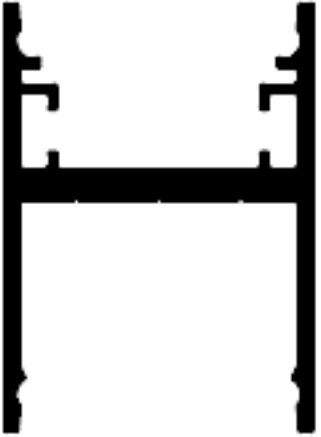

Item	Product code	Description	Dimmension	Material	Color	diffuser/lens type
						
	AL-SL15FL-2	New, Premium Line, high efficiency, surface/suspend Slim Line 15 FL aluminum LED profile with light reflectors	2m	anodized aluminum	silver	no diffuser (1x), no reflectors (x2) needs to be chosen from below list
	AL-SL15FL-3	New, Premium Line, high efficiency, surface/suspend Slim Line 15 FL aluminum LED profile with light reflectors	3m	anodized aluminum	silver	no diffuser (1x), no reflectors (x2) needs to be chosen from below list
	AL-SL15FL-6.1	New, Premium Line, high efficiency, surface/suspend Slim Line 15 FL aluminum LED profile with light reflectors	6.1m	anodized aluminum	silver	no diffuser (1x), no reflectors (x2) needs to be chosen from below list
	AL-SL15B-FL-6.1	New, Premium Line, high efficiency, surface/suspend Slim Line 15 FL aluminum LED profile with light reflectors	6.1m	anodized aluminum	black	no diffuser (1x), no reflectors (x2) needs to be chosen from below list
	AL-REF-13-B60-2	Light reflector Vega95 width 13mm for SL15 FL, RSL15 US length 1985mm, increase the light output efficiency +20% (in compare to profile without reflectors)	1.98m	reflector Vega 95	reflector	light reflector (need 2x per profile), increase the profile efficiency by 20%
	AL-REF-13-B60-3	Light reflector Vega95 width 13mm for SL15 FL, RSL15 US length 2985mm, increase the light output efficiency +20% (in compare to profile without reflectors)	2.98m	reflector Vega 96	reflector	light reflector (need 2x per profile), increase the profile efficiency by 20%
	EC-SL15 FL-H3	Anodized aluminium end cap for SL15 FL profile without cable hole	pcs	anodized aluminum	silver	-
	EC-SL15 FL-H1	Anodized aluminium end cap for SL15 FL profile without cable hole with holding ears	pcs	anodized aluminum	silver	-
MC-SL15 FL STEEL	Stainless steel mounting bracket for SL 15 FL led profile	pcs	stain less steel	silver		
MC-SL15 FL STEEL-B	new, Stainless steel mounting bracket for SL 15 FL led profile painted in BLACK	pcs	stain less steel	black	new, stainless steel mounting bracket in black, powder coat painted	
MC-CAB-1,6	Steel suspension cable 1,6m long with anchor, set of two	set	aluminum/steel	silver	set of two	
COLOUR-CAB-1,6	new, Cooled textil cable 2x075mm2, length 1,6m	pcs	cable	colour	-	
CUT-1	Quality 45/90/125 degree cut service	pcs	cut	profil/diffuser	extra service (option)	
MIL-1	Quality milling service	pcs	mill	profil	extra service (option)	
DRIL-1	Quality drilling service	pcs	dril	profil	extra service (option)	
NEW, SL15 FL 17,5x19mm						

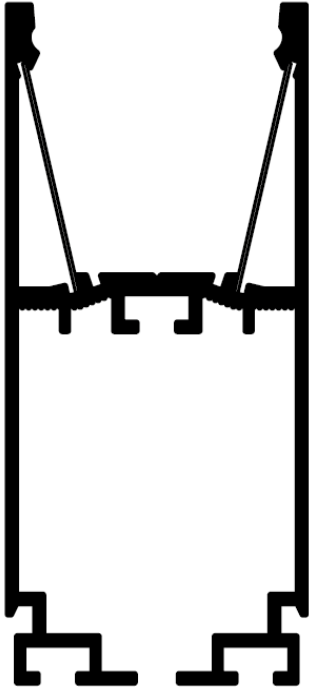




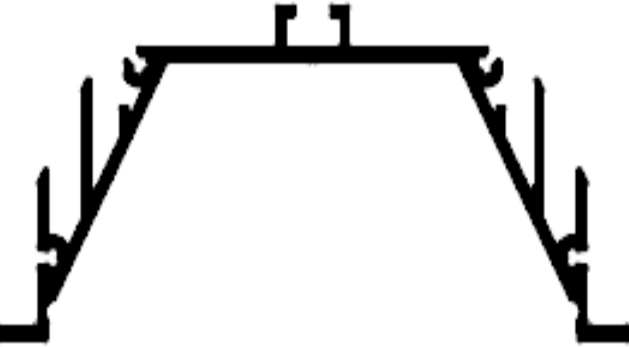

						
	AL-RSL15US-2	new, Plaster board profile, RSL15FL US for TRIMLESS INSTALLATION, recess, RAW aluminum, suitable with the light reflector Vega95 (increases light output+20%)	2m	RAW aluminum	silver	no diffuser, need to be chosen from below list,
	AL-RSL15US-3	new, Plaster board profile, RSL15FL US for TRIMLESS INSTALLATION, recess, RAW aluminum, suitable with the light reflector Vega95 (increases light output+20%)	3m	RAW aluminum	silver	no diffuser, need to be chosen from below list,
	AL-RSL15US-6.1	new, Plaster board profile, RSL15FL US for TRIMLESS INSTALLATION, recess, RAW aluminum, suitable with the light reflector Vega95 (increases light output+20%)	6.1m	RAW aluminum	silver	no diffuser, need to be chosen from below list,
	EC-RSL15US-H3	End cap for plaster board profile RSL15 US, without cable hole	pcs	RAW aluminum	silver	-
	AL-REF-13-B60-2	Light reflector Vega95 width 13mm for SL15 FL, RSL15 US length 1985mm, increase the light output efficiency +20% (in compare to profile without reflectors)	1.98m	reflector Vega 95	reflector	light reflector (need 2x per profile), increase the profile efficiency by 20%
	AL-REF-13-B60-3	Light reflector Vega95 width 13mm for SL15 FL, RSL15 US length 2985mm, increase the light output efficiency +20% (in compare to profile without reflectors)	2.98m	reflector Vega 96	reflector	light reflector (need 2x per profile), increase the profile efficiency by 20%
	LC-LIN	Linear connector	pcs	galvanized steel	silver	-
	90LC-HOR	90° degree horizontal connector	pcs	galvanized steel	silver	-
90LC-VER	90° degree vertical connector	pcs	galvanized steel	silver	-	
CUT-1	Quality 45/90/125 degree cut service	pcs	cut	profil/diffuser	extra service (option)	
MIL-1	Quality milling service	pcs	mill	profil	extra service (option)	
DRIL-1	Quality drilling service	pcs	dril	profil	extra service (option)	
NEW, Plaster Board profile, 22,8x57,5mm, RSL15 US, efficiency is +20% ↑with the sides reflectors						

						
	AL-CE US-2	new, Plaster board profile, CE US for WALL/CEILING, TRIMLESS INSTALLATION, RAW aluminum	2m	RAW aluminum	silver	no diffuser, need to be chosen from below list,
	AL-CE US-3	new, Plaster board profile, CE US for WALL/CEILING, TRIMLESS INSTALLATION, RAW aluminum	3m	RAW aluminum	silver	no diffuser, need to be chosen from below list,
	AL-CE US-6.1	new, Plaster board profile, CE US for WALL/CEILING, TRIMLESS INSTALLATION, RAW aluminum	6.1m	RAW aluminum	silver	no diffuser, need to be chosen from below list,
	EC-SL15 FL-H3	RAW aluminium end cap for SL15 FL, CE US profiles without cable hole	pcs	RAW aluminum	silver	-
	AL-REF-13-B60-2	Light reflector Vega95 width 13mm for SL15 FL, RSL15 US length 1985mm, increase the light output efficiency +20% (in compare to profile without reflectors)	1.98m	reflector Vega 95	reflector	light reflector (need 2x per profile), increase the profile efficiency by 20%
	AL-REF-13-B60-3	Light reflector Vega95 width 13mm for SL15 FL, RSL15 US length 2985mm, increase the light output efficiency +20% (in compare to profile without reflectors)	2.98m	reflector Vega 96	reflector	light reflector (need 2x per profile), increase the profile efficiency by 20%
	LC-LIN	Linear connector	pcs	galvanized steel	silver	-
	90LC-HOR	90° degree horizontal connector	pcs	galvanized steel	silver	-
90LC-VER	90° degree vertical connector	pcs	galvanized steel	silver	-	
CUT-1	Quality 45/90/125 degree cut service	pcs	cut	profil/diffuser	additional service (option)	
MIL-1	Quality milling service	pcs	mill	profil	additional service (option)	
DRIL-1	Quality drilling service	pcs	dril	profil	additional service (option)	
NEW, Plaster Board, trimless finish CE US profile WALL/CEILING INSTALLATION						






Item	Product code	Description	Dimmension	Material	Color	diffuser/lens type
 FLAT AB-SL15FL, LED's DOTS FREE, WALK OVER SAFE DIFFUSER	AB-SL15FL-M2	Flat, walk over safe, led's dot's free diffuser for SL15FL, RSL15 US, CE US	2m	polycarbonate UV-st.	frosted/opal	diffuser, certfyied UV stabilized material
	AB-SL15FL-M3	Flat, walk over safe, led's dot's free diffuser for SL15FL, RSL15 US, CE US	3m	polycarbonate UV-st.	frosted/opal	diffuser, certfyied UV stabilized material
	AB-SL15FL-M6.1	Flat, walk over safe, led's dot's free diffuser for SL15FL, RSL15 US, CE US	6.1m	polycarbonate UV-st.	frosted/opal	diffuser, certfyied UV stabilized material
	AB-SL15FL-B6.1	Flat, walk over safe, led's dot's free diffuser for SL15FL, RSL15 US, CE US	6.1m	polycarbonate UV-st.	black/opal	diffuser, black/opal (off/on), new product
 New , PRISMATIC FILM UGR>19 TO SLIDE INTO DIFFUSER	AB-SL15FL-K2	Flat, walk over safe, led's dot's free diffuser for SL15FL, RSL15 US, CE US	2m	polycarbonate UV-st.	clear/transparent	diffuser, certfyied UV stabilized material
	AB-SL15FL-K3	Flat, walk over safe, led's dot's free diffuser for SL15FL, RSL15 US, CE US	3m	polycarbonate UV-st.	clear/transparent	diffuser, certfyied UV stabilized material
	AB-SL15FL-K6.1	Flat, walk over safe, led's dot's free diffuser for SL15FL, RSL15 US, CE US	6.1m	polycarbonate UV-st.	clear/transparent	diffuser, certfyied UV stabilized material
	AB-FILM15-PRI-2	UGR<19 Micro prismatic film to slide into the diffuser, length 1985mm	2m	micro prismatic/clear	clear/transparent	high light transmission, micro prismatic pattern film, antiglare UGR<19
	AB-FILM15-PRI-3	UGR<19 Micro prismatic film to slide into the diffuser, length 2985mm	3m	micro prismatic/clear	clear/transparent	high light transmission, micro prismatic pattern film, antiglare UGR<19
 NEW , 15° PMMA OPTIC LENS , AB-SL15FL-L15	AB-SL15FL-L15M2	15° degree, PMMA OPTIC LENS, semi opal finish for SL15 FL led profile	2,02m	PMMA, UV-st.	semi opal	PMMA optic lens, semi opal skin finish
	AB-SL15FL-L15M3	15° degree, PMMA OPTIC LENS, semi opal finish for SL15 FL led profile	3,02m	PMMA, UV-st.	semi opal	PMMA optic lens, semi opal skin finish
	AB-SL15FL-L15M6.1	15° degree, PMMA OPTIC LENS, semi opal finish for SL15 FL led profile	6.1m	PMMA, UV-st.	semi opal	PMMA optic lens, semi opal skin finish
 SLW8- 9,9x22,6mm	AL-SLW8-2	SlimLine Wide 8mm, anodized in silver aluminum LED profile	2m	anodized aluminum	silver	no diffuser, needs to be chosen from below list,
	AL-SLW8-3	SlimLine Wide 8mm, anodized in silver aluminum LED profile	3m	anodized aluminum	silver	no diffuser, needs to be chosen from below list,
	AL-SLW8-6.1	SlimLine Wide 8mm, anodized in silver aluminum LED profile for future customer customize cut	6.1m	anodized aluminum	silver	no diffuser, needs to be chosen from below list,
	MC-SLW8-STEEL	Spring steel mounting bracket for SlimLine Wide 8mm LED profile	pcs	spring steel	silver	new , replace the ABS mounting bracket
	MC-SLW8	ABS mounting bracket for SlimLine Wide 8mm LED profile	pcs	ABS	grey	promotion , valid till the end of the stock
	EC-SLW8-H2	ABS end cap for SlimLine Wide 8mm LED profile, with cable hole	pcs	ABS	grey	promotion , valid till the end of the stock
	EC-SLW8-H3	Aluminum end cap for SlimLine Wide 8mm LED profile, w/out cable hole	pcs	aluminum	silver	-
	EC-SLW8-H4	Aluminum end cap for SlimLine Wide 8mm LED profile, with cable hole	pcs	aluminum	silver	-
	CUT-1	Quality 45/90/125 degree cut service	pcs	cut	profil/diffuser	extra service (option)
	MIL-1	Quality milling service	pcs	mill	profil	extra service (option)
	DRIL-1	Quality drilling service	pcs	dril	profil	extra service (option)
 RSLW8 - 9,9x29,6mm	AL-RSLW8-2	Recess SlimLine Wide 8mm, anodized in silver aluminum LED profile	2m	anodized aluminum	silver	no diffuser, needs to be chosen from below list,
	AL-RSLW8-6.1	Recess SlimLine Wide 8mm, anodized in silver aluminum LED profile	6.1m	anodized aluminum	silver	no diffuser, needs to be chosen from below list,
	EC-RSLW8-H3	Aluminum end cap for RSLW8 LED profile, w/out cable hole	pcs	aluminum	silver	-
	EC-RSLW8-H4	Aluminum end cap for RSLW8 LED profile, with cable hole	pcs	aluminum	silver	-
	CUT-1	Quality 45/90/125 degree cut service	pcs	cut	profil/diffuser	extra service (option)
	MIL-1	Quality milling service	pcs	mill	profil	extra service (option)
	DRIL-1	Quality drilling service	pcs	dril	profil	extra service (option)
 SLW15-17x22,6mm	AL-SLW15-2	SlimLine Wide 15mm, anodized in silver aluminum LED profile	2m	anodized aluminum	silver	no diffuser, needs to be chosen from below list,
	AL-SLW15-3	SlimLine Wide 15mm, anodized in silver aluminum LED profile	3m	anodized aluminum	silver	no diffuser, needs to be chosen from below list,
	AL-SLW15-6.1	SlimLine Wide 15mm, anodized in silver aluminum LED profile for future customer customize cut	6.1m	anodized aluminum	silver	no diffuser, needs to be chosen from below list,
	EC-SLW15-H3	Aluminum end cap for SlimLine Wide 15mm LED profile, w/out cable hole	pcs	aluminum	silver	-
	EC-SLW15-H4	Aluminum end cap for SlimLine Wide 15mm, with cable hole	pcs	aluminum	silver	-
	MC-SLW15-STEEL	Stainless steel, spring mounting bracket for SlimLine Wide 15mm LED profile	pcs	stainless steel	silver	new , replace the ABS mounting bracket
	MC-SLW15	ABS mounting bracket for SlimLine Wide 15mm LED profile	pcs	ABS	grey	promotion , valid till the end of the stock
	CUT-1	Quality 45/90/125 degree cut service	pcs	cut	profil/diffuser	extra service (option)
	MIL-1	Quality milling service	pcs	mill	profil	extra service (option)
	DRIL-1	Quality drilling service	pcs	dril	profil	extra service (option)
 CEILING-37,3x46,3mm	AL-CE-2	Alu-Ceiling, anodized in silver aluminum LED profile	2m	anodized aluminum	silver	no diffuser, needs to be chosen from below list,
	AL-CE-3	Alu-Ceiling, anodized in silver aluminum LED profile	3m	anodized aluminum	silver	no diffuser, needs to be chosen from below list,
	AL-CE-6.1	Alu-Ceiling, anodized in silver aluminum LED profile	6.1m	anodized aluminum	silver	no diffuser, needs to be chosen from below list,
	CUT-1	Quality 45/90/125 degree cut service	pcs	cut	profil/diffuser	extra service (option)
	MIL-1	Quality milling service	pcs	mill	profil	extra service (option)
	DRIL-1	Quality drilling service	pcs	dril	profil	extra service (option)
 DIFFUSER	AB-SLW-K2	Diffuser for SLW8, RSLW8, SLW15, Alu-Ceiling, RO38, WLL series profiles	2m	polycarbonate UV-st.	clear/transparent	diffuser, certfyied UV stabilized material
	AB-SLW-K3	Diffuser for SLW8, RSLW8, SLW15, Alu-Ceiling, RO38, WLL series profiles	3m	polycarbonate UV-st.	clear/transparent	diffuser, certfyied UV stabilized material
	AB-SLW-K6.1	Diffuser for SLW8, RSLW8, SLW15, Alu-Ceiling, RO38, WLL series profiles	6.1m	polycarbonate UV-st.	clear/transparent	diffuser, certfyied UV stabilized material
	AB-SLW-M2	Diffuser for SLW8, RSLW8, SLW15, Alu-Ceiling, RO38, WLL series profiles	2m	polycarbonate UV-st.	frosted/opal	diffuser, certfyied UV stabilized material
	AB-SLW-M3	Diffuser for SLW8, RSLW8, SLW15, Alu-Ceiling, RO38, WLL series profiles	3m	polycarbonate UV-st.	frosted/opal	diffuser, certfyied UV stabilized material
	AB-SLW-M6.1	Diffuser for SLW8, RSLW8, SLW15, Alu-Ceiling, RO38, WLL series profiles	6.1m	polycarbonate UV-st.	frosted/opal	diffuser, certfyied UV stabilized material
	AB-SLW-50M3	Diffuser for SLW8, RSLW8, SLW15, Alu-Ceiling, RO38, WLL series profiles	3m	polycarbonate UV-st.	50% frosted/opal	diffuser, certfyied UV stabilized material
	AB-SLW-50M6.1	Diffuser for SLW8, RSLW8, SLW15, Alu-Ceiling, RO38, WLL series profiles	6.1m	polycarbonate UV-st.	50% frosted/opal	diffuser, certfyied UV stabilized material

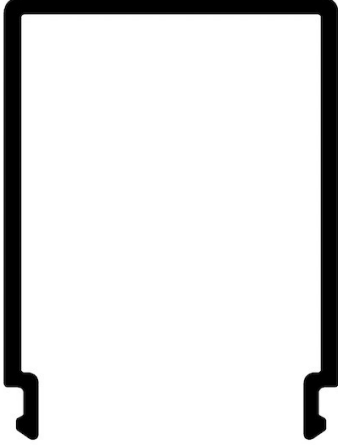
A technical cross-section drawing of a window frame assembly. The drawing illustrates the integration of thermal insulation. On the left, a vertical section of the frame is shown with a multi-layered structure. A central cavity is filled with a material represented by a wavy, stippled pattern, indicating insulation. This insulated section is flanked by solid structural materials. To the right, a horizontal section of the frame is shown, featuring a series of rectangular cavities, each filled with a similar wavy, stippled insulation material. The drawing uses solid lines for structural components and dashed lines to indicate internal features and the extent of the insulation.

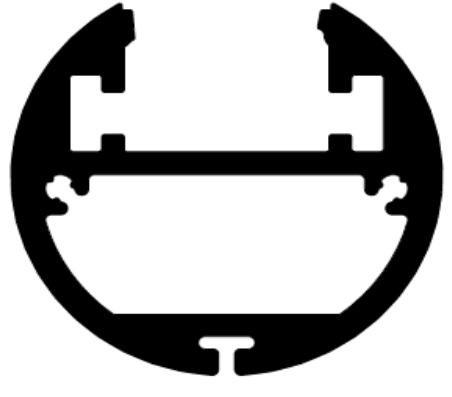
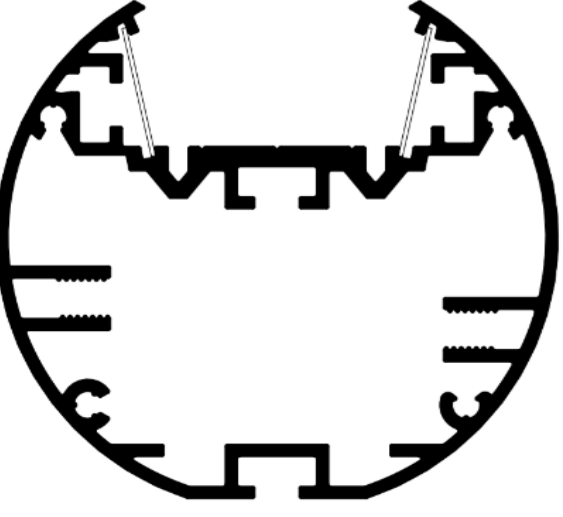
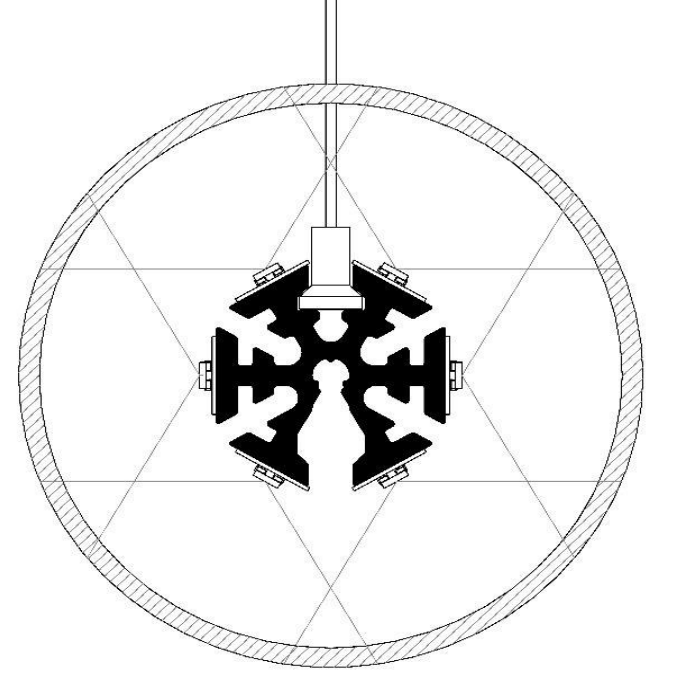
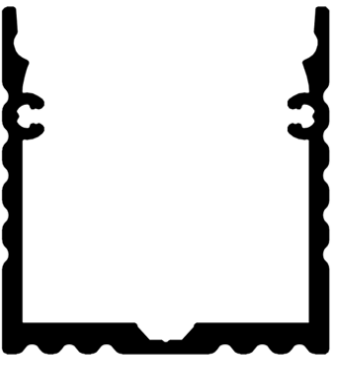

Item	Product code	Description	Dimmension	Material	Color	diffuser/lens type
						
	AL-COVE 3-2	new, Plaster board profile, base profile COVE 3 for WALL/WALL, TRIMLESS INSTALLATION, RAW aluminum, suitable with the INSERT, lighting profile AL-SL15FL	2m	RAW aluminum	silver	The base profile, no diffuser, no insert lighting profile 2pcs per one base, it needs to be chosen additionally
	AL-COVE 3-2	new, Plaster board profile, base profile COVE 3 for WALL/WALL, TRIMLESS INSTALLATION, RAW aluminum, suitable with the INSERT, lighting profile AL-SL15FL	3m	RAW aluminum	silver	The base profile, no diffuser, no insert lighting profile 2pcs per one base, it needs to be chosen additionally
	AL-COVE 3-6.1	new, Plaster board profile, base profile COVE 3 for WALL/WALL, TRIMLESS INSTALLATION, RAW aluminum, suitable with the INSERT, lighting profile AL-SL15FL	6,1m	RAW aluminum	silver	The base profile, no diffuser, no insert lighting profile2pcs per one base, it needs to be chosen additionally
	LC-LIN	Linear connector				
	90LC-HOR	90° degree horizontal connector				
	90LC-VER	90° degree vertical connector				
	AL-INS-SL15FL-2	Insert Slim Line 15 FL aluminum LED profile with light reflectors	2m	anodized aluminum	silver	no diffuser (1x), no reflectors (x2) needs to be chosen from below list, new product
	AL-INS-SL15FL-3	Insert Slim Line 15 FL aluminum LED profile with light reflectors	3m	anodized aluminum	silver	no diffuser (1x), no reflectors (x2) needs to be chosen from below list, new product
	AL-INS-SL15FL-6.1	Insert Slim Line 15 FL aluminum LED profile with light reflectors	6,1m	anodized aluminum	silver	no diffuser (1x), no reflectors (x2) needs to be chosen from below list, new product
	EC-INS-SL15FL-H3	End cap for INSERT SL15FL profile, without cable hole with holding ear, raw aluminium	pcs	raw aluminium	silver	-
	AL-REF-13-B60-2	Light reflector Vega95 width 13mm for SL15 FL, RSL15 US length 1985mm, increase the light output efficiency +20% (in compare to profile without reflectors)	1.98m	reflector Vega 95	reflector	light reflector (need 2x per profile), increase the profile efficiency by 20%
	AL-REF-13-B60-3	Light reflector Vega95 width 13mm for SL15 FL, RSL15 US length 2985mm, increase the light output efficiency +20% (in compare to profile without reflectors)	2.98m	reflector Vega 96	reflector	light reflector (need 2x per profile), increase the profile efficiency by 20%
	AB-SL15FL-K2	Flat, walk over safe, transparent diffuser for SL15FL	2m	polycarbonate UV-st.	clear/transparent	diffuser, certyfied UV stabilized material
	AB-SL15FL-K3	Flat, walk over safe, transparent diffuser for SL15FL	3m	polycarbonate UV-st.	clear/transparent	diffuser, certyfied UV stabilized material
	AB-SL15FL-K6.1	Flat, walk over safe, transparent diffuser for SL15FL	6.1m	polycarbonate UV-st.	clear/transparent	diffuser, certyfied UV stabilized material
	AB-SL15FL-PRI-2	UGR<19 Micro prismatic film to slide into the diffuser, length 1985mm	2m	micro prismatic/clear	clear/transparent	high light transmission, micro prismatic pattern film, antiglare UGR<19
	AB-SL15FL-PRI-3	UGR<19 Micro prismatic film to slide into the diffuser, length 2985mm	3m	micro prismatic/clear	clear/transparent	high light transmission, micro prismatic pattern film, antiglare UGR<19
	AB-SL15FL-PRI-6.1	UGR<19 Micro prismatic film to slide into the diffuser, length 5985mm	6,1m	micro prismatic/clear	clear/transparent	high light transmission, micro prismatic pattern film, antiglare UGR<19
	CUT-1	Quality 45/90/125 degree cut service	pcs	cut	profil/diffuser	additional service (option)
	MIL-1	Quality milling service	pcs	mill	profil	extra service (option)
	DRIL-1	Quality drilling service	pcs	dril	profil	extra service (option)
	AL-SS-2	Alu-Swiss for 6-8mm LED stripe, anodized in silver aluminum LED profile	2m	anodized aluminum	silver	no diffuser, needs to be chosen from below list,
	AL-SS-3	Alu-Swiss for 6-8mm LED stripe, anodized in silver aluminum LED profile	3m	anodized aluminum	silver	no diffuser, needs to be chosen from below list,
	MC-SS-BAS-2	Fixation base forAlu-Swis, Swiss 20 LED profile	2m	polycarbonate	grey	-
	MC-SS-BAS-3	Fixing base forAlu-Swiss LED profile, 2m long, grey color	3m	polycarbonate	grey	-
	MC-CAB-1,6	Steel suspension cable 1,6m long with anchor, set of two	set	aluminum/steel	silver	set of two
	COLOUR-CAB-1,6	new, Cooled textile cable 2x075mm2, length 1,6m	pcs	cable	colour	-
	EC-SS-H1	Aluminum end cap for Alu-Swiss LED profile, w/out cable hole	pcs	aluminum	silver	-
	EC-SS-H2	Aluminum end cap for Alu-Swiss LED profile, with cable hole	pcs	aluminum	silver	-
	AB-SS-K2	Diffuser for Alu-Swiss profile,	2m	polycarbonate UV-st.	clear/transparent	diffuser, certyfied UV stabilized material
	AB-SS-M2	Diffuser for Alu-Swiss profile,	2m	polycarbonate UV-st.	frosted/opal	diffuser, certyfied UV stabilized material
	AB-SS-K3	Diffuser for Alu-Swiss profile,	3m	polycarbonate UV-st.	clear/transparent	diffuser, certyfied UV stabilized material
	AB-SS-M3	Diffuser for Alu-Swiss profile,	3m	polycarbonate UV-st.	frosted/opal	diffuser, certyfied UV stabilized material
	AB-SS-M6,1	Diffuser for Alu-Swiss profile,	6,1m	polycarbonate UV-st.	frosted/opal	diffuser, certyfied UV stabilized material
	CUT-1	Quality 45/90/125 degree cut service	pcs	cut	profil/diffuser	extra service (option)
	MIL-1	Quality milling service	pcs	mill	profil	extra service (option)
	DRIL-1	Quality drilling service	pcs	dril	profil	extra service (option)
	AL-DPLS-2	Double Power Line Slim 30 (light up/down) DPLS, anodized in silver LED profile	2m	anodized aluminum	silver	no diffuser (2x), needs to be chosen from below list
	AL-DPLS-6.1	Double Power Line Slim 30 (light up/down) DPLS, anodized in silver LED profile for future customer customize cut	6,1m	anodized aluminum		no diffuser (2x), needs to be chosen from below list
	EC-DPLS	Aluminum end cap for PLSD	pcs	aluminum	silver	-
	MC-DPLS	Surface/pendant mounting bracket for DPLS LED profile	pcs	spring steel	silver	-
	LC-LIN	Linear connector	pcs	steel	silver	-
	90LC-HOR	90° degree horizontal connector	pcs	steel	silver	-
	90LC-VER	90° degree vertical connector	pcs	steel	silver	-
	120LC-VER	120° degree vertical connector	pcs	steel	silver	-
	MC-CAB-1,6	Steel suspension cable 1,6m long with anchor, set of two	set	aluminum/steel	silver	-
	COLOUR-CAB-1,6	Cooled textile cable 2x075mm2, length 1,6m	pcs	cable	colour	-
	17-DURIS-WW	Double row constant voltage Rigid FR-4 with Osram Duris E5 LEDs, 24V, CC driver on board, 11,6W, 3pcs/m	1pcs	Osram Duris E5	2700°K	POWERED BY  LED CHIPS
	17-DURIS-NW	Double row constant voltage Rigid FR-4 with Osram Duris E5 LEDs, 24V, CC driver on board, 11,6W, 3pcs/m	1pcs	Osram Duris E5	4000°K	
	17-DURIS-CW	Double row constant voltage Rigid FR-4 with Osram Duris E5 LEDs, 24V, CC driver on board, 11,6W, 3pcs/m	1pcs	Osram Duris E5	5000°K	
	CUT-1	Quality 45/90/125 degree cut service	pcs	cut	profil/diffuser	extra service (option)
	MIL-1	Quality milling service	pcs	mill	profil	extra service (option)
	DRIL-1	Quality drilling service	pcs	dril	profil	extra service (option)

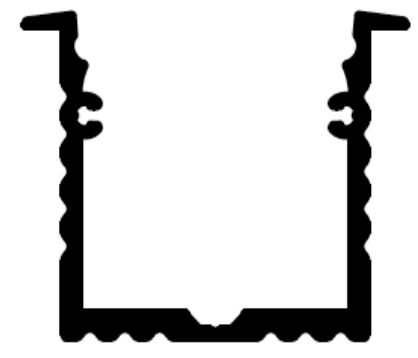

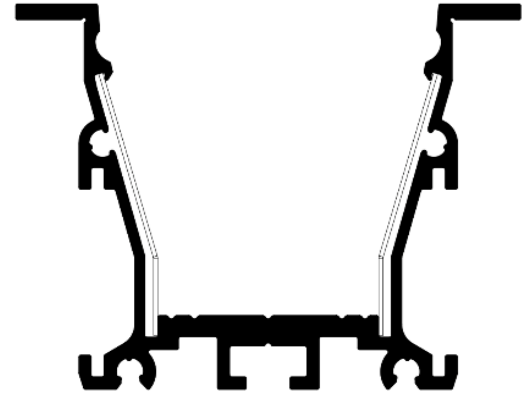

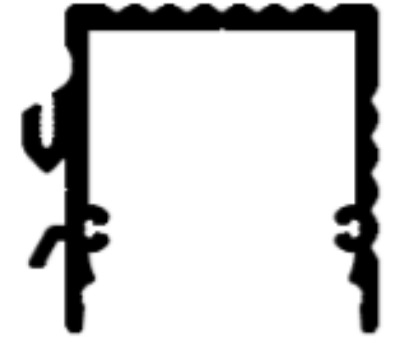

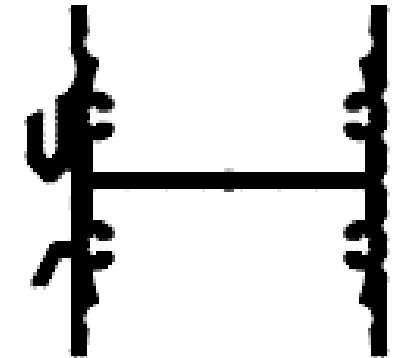

Item	Product code	Description	Dimmension	Material	Color	diffuser/lens type
 PREMIUM LINE PROFILE, PLS33 FL 72x33mm, with 95% efficiency light reflector, efficiency is +20% ↑with the sides reflectors						
	AL-PLS33FL-2	new, Premium line, surface/suspend/wall installed PLS33 aluminum led profile with light reflector	2m	anodized aluminum	silver	no diffuser (1x), no reflector (2x) needs to be chosen from below list
	AL-PLS33FL-3	new, Premium line, surface/suspend/wall installed PLS33 aluminum led profile with light reflector	3m	anodized aluminum	silver	no diffuser (1x), no reflector (2x) needs to be chosen from below list
	AL-PLS33FL-6.1	new, Premium line, surface/suspend/wall installed PLS33 aluminum led profile with light reflector	6,1m	anodized aluminum	silver	no diffuser (1x), no reflector (2x) needs to be chosen from below list
	AL-BA-PLS33-6.1	Surface instalation base profile for click it in PLS33 aluminum profile	6,1m	anodized aluminum	silver	surface click in instalation base aluminum profile for PLS33
	AL-REF25-2	Light reflector Vega95 width 25mm for PLS33, RPL55 length 1985mm	1,98	reflector Vega 95	reflector	light reflector (need 2x), increase the profile efficiency by 20%
	AL-REF25-3	Light reflector Vega95 width 25mm for PLS33 ,RPL55 length 2985mm	2,98	reflector Vega 96	reflector	light reflector (need 2x), increase the profile efficiency by 20%
	EC-PLS33	new, Aluminum end cap for PLS33 without cable hole	pcs	aluminum	silver	-
	LC-LIN	Linear connector	pcs	steel	silver	-
	90LC-HOR	90' degree horizontal connector	pcs	steel	silver	-
	MC-PLS33	new, Mounting bracket for surface instalation for PLS33 profile	pcs	anodized aluminum	silver	-
	MC-PLS33-WALL	new, Wall mounting bracket for PLS33 profile	pcs	galvanized steel	silver	-
	COLOUR-CAB-1,6	Coolored textil cable 2x075mm2, length 1,6m	pcs	cable	colour	-
	17-DURIS-WW	Double row constant voltage Rigid FR-4 with Osram Duris E5 LEDs, 24V, CC driver on board, 11,6W, 3pcs/m	1pcs	Osram Duris E5	2700'K	POWERED BY  LED CHIPS
	17-DURIS-NW	Double row constant voltage Rigid FR-4 with Osram Duris E5 LEDs, 24V, CC driver on board, 11,6W, 3pcs/m	1pcs	Osram Duris E5	4000'K	
	17-DURIS-CW	Double row constant voltage Rigid FR-4 with Osram Duris E5 LEDs, 24V, CC driver on board, 11,6W, 3pcs/m	1pcs	Osram Duris E5	5000'K	
 DIFFUSER	CUT-1	Quality 45/90/125 degree cut service	pcs	cut	profil/diffuser	extra service (option)
	MIL-1	Quality milling service	pcs	mill	profil	extra service (option)
	DRIL-1	Quality drilling service	pcs	dril	profil	extra service (option)
 PLW80N-35x80mm						
		END of production, new model coming up, sale -13% price reduction, in sale till end of the stock				
	AL-PLW80N-2	Power Line Wide 80 (PLW80N), anodized in silver aluminum LED profile	2m	anodized aluminum	silver	no diffuser, needs to be chosen from below list
	AL-PLW80N-3	Power Line Wide 80 (PLW80N), anodized in silver aluminun LED profile	3m	anodized aluminum	silver	no diffuser, needs to be chosen from below list
	AL-PLW80N-6.1	Power Line Wide 80 (PLW80N), anodized in silver aluminum LED profile, for future customer customize cut	6,1m	anodized aluminum	silver	no diffuser, needs to be chosen from below list
	LC-PLW80	Aluminum linear connector for PLW80N LED profile	pcs	aluminum	silver	-
	EC-PLW80N	Aluminum end cap for PLW80N LED profile w/out cable hole	pcs	aluminum	silver	-
	36-DURIS-WW	Double row constant voltage Rigid FR-4 with Osram Duris E5 LEDs, 24V, CC driver on board, 11,6W, 3pcs/m	1pcs	Osram Duris E5	2700'K	POWERED BY  LED CHIPS
	36-DURIS-NW	Double row constant voltage Rigid FR-4 with Osram Duris E5 LEDs, 24V, CC driver on board, 11,6W, 3pcs/m	1pcs	Osram Duris E5	4000'K	
	36-DURIS-CW	Double row constant voltage Rigid FR-4 with Osram Duris E5 LEDs, 24V, CC driver on board, 11,6W, 3pcs/m	1pcs	Osram Duris E5	5000'K	
	CUT-1	Quality 45/90/125 degree cut service	pcs	cut	profil/diffuser	extra service (option)
	MIL-1	Quality milling service	pcs	mill	profil	extra service (option)
	DRIL-1	Quality drilling service	pcs	dril	profil	extra service (option)
 RPLW80-92x40mm						
	AL-RPLW80-2	Recess Power Line Wide 80 (RPLW80), anodized in silver, aluminum LED profile	2m	anodized aluminum	silver	no diffuser, needs to be chosen from below list,
	AL-RPLW80-3	Recess Power Line Wide 80 (RPLW80), anodized in silver, aluminum LED profile	3m	anodized aluminum	silver	no diffuser, needs to be chosen from below list,
	AL-RPLW80-6.1	Recess Power Line Wide 80 (RPLW80), anodized in silver, aluminum LED profile, for future customer customize cut	6,1m	aluminum	silver	no diffuser, needs to be chosen from below list,
	MC-RPLW80	Mounting bracket for gypsum ceiling instalation for Recess Power Line Wide 80 LED profile	pcs	steel	silver	-
	LC-RPLW80	Aluminum liner connector for RPLW80 LED profile	pcs	aluminum	silver	-
	EC-RPLW80-H1	Aluminum end cap for RPLW80 LED profile w/out cable hole	pcs	aluminum	silver	-
	36-DURIS-WW	Double row constant voltage Rigid FR-4 with Osram Duris E5 LEDs, 24V, CC driver on board, 11,6W, 3pcs/m	1pcs	Osram Duris E5	2700'K	POWERED BY  LED CHIPS
	36-DURIS-NW	Double row constant voltage Rigid FR-4 with Osram Duris E5 LEDs, 24V, CC driver on board, 11,6W, 3pcs/m	1pcs	Osram Duris E5	4000'K	
	36-DURIS-CW	Double row constant voltage Rigid FR-4 with Osram Duris E5 LEDs, 24V, CC driver on board, 11,6W, 3pcs/m	1pcs	Osram Duris E5	5000'K	
	CUT-1	Quality 45/90/125 degree cut service	pcs	cut	profil/diffuser	extra service (option)
	MIL-1	Quality milling service	pcs	mill	profil	extra service (option)
	DRIL-1	Quality drilling service	pcs	dril	profil	extra service (option)

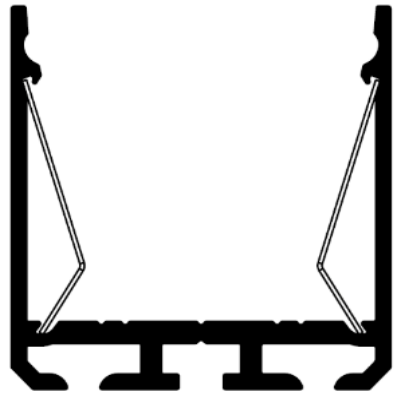

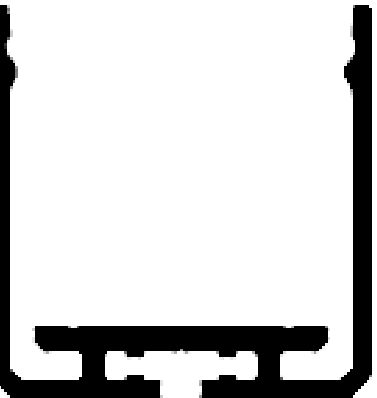

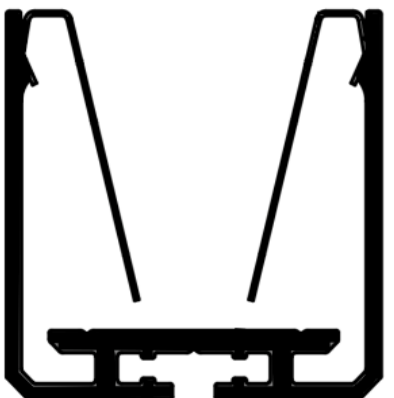

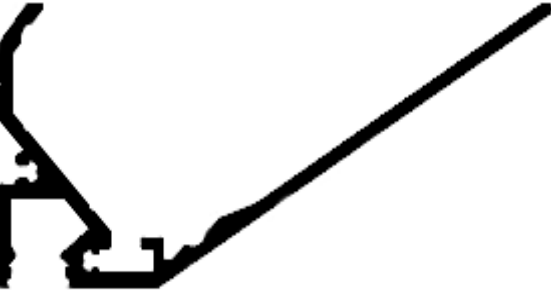
Item	Product code	Description	Dimmension	Material	Color	diffuser/lens type	
 PREMIUM LINE PROFILE, RPLW80 FL-92x53mm, with 95% efficiency light reflector, efficiency is +20% ↑with the sides reflectors	AL-RPLW80 FL-2 AL-RPLW80 FL-3 AL-RPLW80 FL-6.1	Premium Line Recess Power Line Wide 80 FL, recess, aluminum LED profile with light reflector Premium Line Recess Power Line Wide 80 FL, recess, aluminum LED profile with light reflector Premium Line Recess Power Line Wide 80 FL, recess, aluminum LED profile with light reflector	2m 3m 6,1m	anodized aluminum anodized aluminum aluminum	silver silver silver	no diffuser (1x), no reflector (2x) needs to be chosen from below list no diffuser (1x), no reflector (2x) needs to be chosen from below list no diffuser (1x), no reflector (2x) needs to be chosen from below list	
	AL-REF-32-2 AL-REF-32-3	Light reflector Vega95 width 32mm for RPLW80 FL, DPL55 FL, PL555 FL length 1985mm Light reflector Vega95 width 32mm for RPLW80 FL, DPL55 FL, PL55 FL length 2985mm	1,98 2,98	reflector Vega 95 reflector Vega 96	reflector reflector	light reflector (need 2x), increase the profile efficiency by 20% light reflector (need 2x), increase the profile efficiency by 20%	
	LC-LIN 90LC-HOR EC-RPLW80 FL MC-SPR-B	Linear connector 90° degree horizontal connector new , Aluminum end cap for RPLW80 LED profile w/out cable hole new , Spring bracket (large) for RPL55 led profile, 2pcs set	pcs pcs pcs 2 pcs set	galvanized steel galvanized steel aluminum stainless steel	silver silver silver silver	- - - -	
	36-DURIS-WW 36-DURIS-NW 36-DURIS-CW	Double row constant voltage Rigid FR-4 with Osram Duris E5 LEDs, 24V, CC driver on board, 11,6W, 3pcs/m Double row constant voltage Rigid FR-4 with Osram Duris E5 LEDs, 24V, CC driver on board, 11,6W, 3pcs/m Double row constant voltage Rigid FR-4 with Osram Duris E5 LEDs, 24V, CC driver on board, 11,6W, 3pcs/m	1pcs 1pcs 1pcs	Osram Duris E5 Osram Duris E5 Osram Duris E5	2700°K 4000°K 5000°K	POWERED BY  LED CHIPS	
	CUT-1 MIL-1 DRIL-1	Quality 45/90/125 degree cut service Quality milling service Quality drilling service	pcs pcs pcs	cut mill dril	profil/diffuser profil profil	extra service (option) extra service (option) extra service (option)	
 DIFFUSER	AB-PLW80-K2 AB-PLW80-M2 AB-PLW80-M3 AB-PLW80-M6.1	Diffuser for PLW80N, RPLW80, Alu-Triangle series profiles Diffuser for PLW80N, RPLW80, Alu-Triangle series profiles Diffuser for PLW80N, RPLW80, Alu-Triangle series profiles Diffuser for PLW80N, RPLW80, Alu-Triangle series profiles	2m 2m 3m 6,1m	polycarbonate UV-st. polycarbonate UV-st. polycarbonate UV-st. polycarbonate UV-st.	clear/prismatic frosted/opal frosted/opal frosted/opal	diffuser, certiyed UV stabilized material diffuser, certified UV stabilized material diffuser, certified UV stabilized material diffuser, certiyed UV stabilized material	
 PREMIUM LINE PROFILE, SLW20 FL-23x27mm, with 95% efficiency light reflector, efficiency is +20% ↑with the sides reflectors	AL-SLW20 FL-2 AL-SLW20 FL-3 AL-SLW20 FL-6.1	Premium Line Profile SLW20 FL, anodized in silver aluminum led profile 23x27mm suitable with the light reflector Vega95 Premium Line Profile SLW20 FL, anodized in silver aluminum led profile 23x27mm suitable with the light reflector Vega95 Premium Line Profile SLW20 FL, anodized in silver aluminum led profile 23x27mm suitable with the light reflector Vega95	2m 3m 6,1	anodized aluminum anodized aluminum anodized aluminum	silver silver silver	no diffuser (1x), no reflector (2x) needs to be chosen from below list,	
	AL-REF25-B50-2 AL-REF25-B50-3	Light reflector Vega95 width 25mm, bent 50° degree for SPL FL, RSLW20 FL, SLW20 FL LED profile, length 1985mm Light reflector Vega95 width 25mm, bent 50° degree for SPL FL, RSLW20 FL, SLW20 FL LED profile, length 2985mm	1,85m 2,85m	reflector Vega 95 reflector Vega 96	reflector reflector	light reflector (need 2x), increase the profile efficiency by 20% light reflector (need 2x), increase the profile efficiency by 20%	
	EC-SLW20 FL MC-SLW20-STEEL MC-CAB-1,6	new , Auminum end caps, anodized for SLW20 FL profile Spring steel mounting bracket for SLW20 LED profile Steel suspension cable 1,6m long with anchor, set of two	pcs pcs set	anodized aluminum spring steel aluminum/steel	silver silver silver	- - -	
	CUT-1 MIL-1 DRIL-1	Quality 45/90/125 degree cut service Quality milling service Quality drilling service	pcs pcs pcs	cut mill dril	profil/diffuser profil profil	extra service (option) extra service (option) extra service (option)	
 SLW20-23,2x28mm	AL-SLW20-2 AL-SLW20-3 AL-SLW20-6.1	Slim Line Wide 20 (SLW20), anodized in silver aluminum LED profile Slim Line Wide 20 (SLW20), anodized in silver aluminum LED profile Slim Line Wide 20 (SLW20), anodized in silver aluminum LED profile	2m 3m 6,1m	anodized aluminum anodized aluminum anodized aluminum	silver silver silver	no diffuser, needs to be chosen from below list, no diffuser, needs to be chosen from below list, no diffuser, needs to be chosen from below list,	
	EC-SLW20 MC-SLW20 MC-SLW20-STEEL MC-CAB-1,6	Aluminum end cap for SLW20 LED profile w/out cable hole Mounting bracket for SLW20 LED profile Spring steel mounting bracket for SLW20 LED profile Steel suspension cable 1,6m long with anchor, set of two	pcs pcs pcs set	aluminum ABS spring steel aluminum/steel	silver grey silver silver	- - - -	
	CUT-1 MIL-1 DRIL-1	Quality 45/90/125 degree cut service Quality milling service Quality drilling service	pcs pcs pcs	cut mill dril	profil/diffuser profil profil	extra service (option) extra service (option) extra service (option)	
 PREMIUM LINE PROFILES RSLW20 FL 36x34mm, with 95% efficiency light reflector, efficiency is +20% ↑with the sides reflectors	AL-RSLW20 FL-2 AL-RSLW20 FL-3 AL-RSLW20 FL-6.1	Premium Line Profile RSLW20 FL, anodized in silver aluminum led profile 36x34mm suitable with the light reflector Vega95 Premium Line Profile RSLW20 FL, anodized in silver aluminum led profile 23x27mm suitable with the light reflector Vega95 Premium Line Profile RSLW20 FL, anodized in silver aluminum led profile 23x27mm suitable with the light reflector Vega95	2m 3m 6,1m	anodized aluminum anodized aluminum anodized aluminum	silver silver silver	no diffuser (1x), no reflector (2x) needs to be chosen from below list no diffuser (1x), no reflector (2x) needs to be chosen from below list no diffuser (1x), no reflector (2x) needs to be chosen from below list	
	AL-REF25-B50-2 AL-REF25-B50-3 EC-RSLW20 FL MC-SPR-A	Light reflector Vega95 width 25mm, bent 50° degree for SPL FL, RSLW20 FL, SLW20 FL series LED profile, length 1985mm Light reflector Vega95 width 25mm, bent 50° degree for SPL FL, RSLW20 FL, SLW20 FL series LED profile, length 2985mm new , Aluminum end cap for RSLW20 FL LED profile w/out cable hole new , Spring bracket (small) for RSLW20 FL, RPL35 FL led profile, 2pcs set	1,98m 2,98m pcs 2 pcs set	reflector Vega 95 reflector Vega 95 anodized aluminum stainless steel	reflector reflector silver silver	light reflector (need 2x), increase the profile efficiency by 20% light reflector (need 2x), increase the profile efficiency by 20% - -	
	LC-LIN 90LC-HOR 90LC-VER	Linear connector 90° degree horizontal connector 90° degree vertical connector	pcs pcs pcs	galvanized steel galvanized steel galvanized steel	silver silver silver	- - -	
	AB-EP-K2 AB-EP-M2 AB-EP-K3 AB-EP-M3 AB-EP-K6.1 AB-EP-M6.1	PMMA diffuser for RSLW20 FL, Alu-Epoxy, EPOXY 2 LED profile PMMA diffuser for RSLW20 FL, Alu-Epoxy, EPOXY 2 LED profile PMMA diffuser for RSLW20 FL, Alu-Epoxy, EPOXY 2 LED profile PMMA diffuser for RSLW20 FL, Alu-Epoxy, EPOXY 2 LED profile PMMA diffuser for RSLW20 FL, Alu-Epoxy, EPOXY 2 LED profile PMMA diffuser for RSLW20 FL, Alu-Epoxy, EPOXY 2 LED profile PMMA diffuser for RSLW20 FL, Alu-Epoxy, EPOXY 2 LED profile	2m 2m 3m 3m 6,1m 6,1m	PMMA, UV-st. PMMA, UV-st. PMMA, UV-st. PMMA, UV-st. PMMA, UV-st. PMMA, UV-st.	clear frosted/opal clear frosted/opal clear frosted/opal	PMMA diffuser, certified UV stabilized material PMMA diffuser, certified UV stabilized material PMMA diffuser, certified UV stabilized material PMMA diffuser, certified UV stabilized material PMMA diffuser, certified UV stabilized material PMMA diffuser, certified UV stabilized material	
	MIL-1 DRIL-1	Quality milling service Quality drilling service	pcs pcs	mill dril	profil profil	extra service (option) extra service (option)	

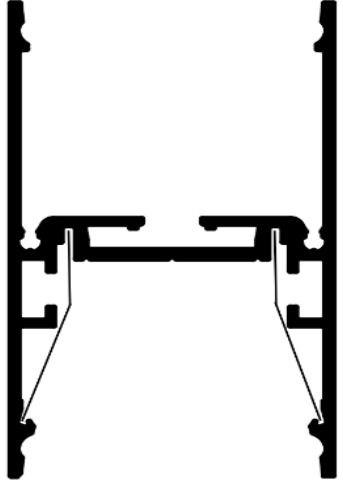
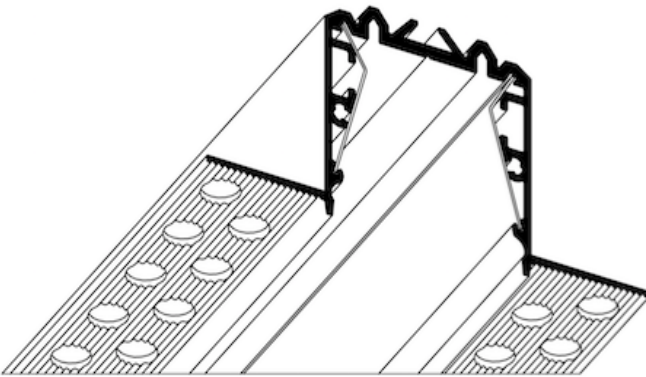



Item	Product code	Description	Dimmension	Material	Color	diffuser/lens type
 DIFFUSER	AB-SLW20-K2	Diffuser for SLW20, RSLW20, SLW20B series profiles,	2m	polycarbonate UV-st.	clear/prismatic	diffuser, certiyed UV stabilized material
	AB-SLW20-M2	Diffuser for SLW20, RSLW20, SLW20B series profiles,	2m	polycarbonate UV-st.	frosted/opal	diffuser, certified UV stabilized material
	AB-SLW20-K3	Diffuser for SLW20, RSLW20, SLW20B series profiles,	3m	polycarbonate UV-st.	clear/prismatic	diffuser, certified UV stabilized material
	AB-SLW20-M3	Diffuser for SLW20, RSLW20, SLW20B series profiles,	3m	polycarbonate UV-st.	frosted/opal	diffuser, certified UV stabilized material
	AB-SLW20-M6.1	Diffuser for SLW20, RSLW20, SLW20B series profiles,	6,1m	polycarbonate UV-st.	frosted/opal	diffuser, certified UV stabilized material
 SLW10 44,8x11mm	AL-SLW10-2	Triple row Led stripe profile, SLW10; (10x44,8mm), anodized in silver aluminum LED profile	2m	anodized aluminum	silver	no diffuser, needs to be chosen from below list,
	AL-SLW10-6.1	new, Triple row Led stripe profile, SLW10; (10x44,8mm), anodized in silver aluminum LED profile	6,1m	anodized aluminum	silver	no diffuser, needs to be chosen from below list,
	EC-SLW10-H1	Aluminum end cap for SLW10 LED profile, w/out cable hole	pcs	aluminum	silver	-
	EC-SLW10-H2	Aluminum end cap for SLW10 LED profile, with cable hole	pcs	aluminum	silver	-
	CUT-1	Quality 45/90/125 degree cut service	pcs	cut	profil/diffuser	extra service (option)
	MIL-1	Quality milling service	pcs	mill	profil	extra service (option)
	DRIL-1	Quality drilling service	pcs	dril	profil	extra service (option)
 ALU-45W (Wide) 41,5x24mm	AL-45W-2	LEDs dot's free, doble row (2x8mm) led stripe, extra wide, 45 degree corner profile, anodized in silver, length 2m	2m	anodized aluminum	silver	no diffuser, needs to be chosen from below list
	AL-45W-3	LEDs dot's free, doble row (2x8mm) led stripe, extra wide, 45 degree corner profile, anodized in silver, length 3m	3m	anodized aluminum	silver	no diffuser, needs to be chosen from below list
	AL-45W-6.1	LEDs dot's free, doble row (2x8mm) led stripe, extra wide, 45 degree corner profile, anodized in silver, length 6,1m	6,1m	anodized aluminum	silver	no diffuser, needs to be chosen from below list
	MC-E2	Spring steel mounting bracket for Alu-Corner, compatible with Alu-45W LED profile	pcs	spring steel	silver	-
	EC-AL45W-H1	new, Anodized, aluminum end caps for Alu-45W profile, without cable hole	pcs	anodized aluminum	silver	-
	EC-AL45W-H2	new, Anodized, aluminum end caps for Alu-45W profile, with cable hole	pcs	anodized aluminum	silver	-
	CUT-1	Quality 45/90/125 degree cut service	pcs	cut	profil/diffuser	extra service (option)
MIL-1	Quality milling service	pcs	mill	profil	extra service (option)	
DRIL-1	Quality drilling service	pcs	dril	profil	extra service (option)	
 Diffuser	AB-SLW10-K2	Diffuser for SLW10, AL-45W profile	2m	polycarbonate UV-st.	clear/transparent	diffuser, certiyed UV stabilized material
	AB-SLW10-K6.1	Diffuser for SLW10, AL-45W profile	6,1m	polycarbonate UV-st.	clear/transparent	diffuser, certified UV stabilized material
	AB-SLW10-50M2	Diffuser for SLW10, AL-45W profile	2m	polycarbonate UV-st.	50%frosted/opal	diffuser, certified UV stabilized material
	AB-SLW10-50M6.1	Diffuser for SLW10, AL-45W profile	6,1m	polycarbonate UV-st.	50%frosted/opal	diffuser, certified UV stabilized material
	AB-SLW10-M2	Diffuser for SLW10, AL45W profile	2m	polycarbonate UV-st.	frosted/opal	diffuser, certified UV stabilized material
	AB-SLW10-M3	Diffuser for SLW10, AL45W profile	3m	polycarbonate UV-st.	frosted/opal	diffuser, certified UV stabilized material
	AB-SLW10-M6.1	Diffuser for SLW10, AL45W profile	6,1m	polycarbonate UV-st.	frosted/opal	diffuser, certified UV stabilized material
 ALU SQUARE 20x24,6mm						
	AL-SQ-2	180° degree light out, Alu-Sqere (24,6x20mm), aluminum LED profile	2m	anodized aluminum	silver	no diffuser, needs to be chosen from below list,
	EC-SQ-H1	Aluminum end cap for Alu-Square profile, w/out cable hole	pcs	aluminum	silver	-
	AB-SQ-M2 rounded	Diffuser for Alu-Square profiles, rounded	2m	polycarbonate UV-st.	frosted/opal	diffuser, certified UV stabilized material

Item	Product code	Description	Dimmension	Material	Color	diffuser/lens type
 27x36,5x1,3mm  27x16x1,3mm  27x12,8mm						
	AB-INS-FLO2-2	new, FLO 180° degree light polycarbonate square diffuser (higher) for AL-INS-FLO PROFILE	2m	polycarbonate UV-st.	frosted/opal	diffuser, certfyied UV stabilized material
	AB-INS-FLO2-3	new, FLO 180° degree light polycarbonate square diffuser (higher) for AL-INS-FLO PROFILE	3m	polycarbonate UV-st.	frosted/opal	diffuser, certfyied UV stabilized material
	AB-INS-FLO2-6.1	new, FLO 180° degree light polycarbonate square diffuser (higher) for AL-INS-FLO PROFILE	6,1m	polycarbonate UV-st.	frosted/opal	diffuser, certfyied UV stabilized material
	AB-INS-FLO1-2	new, FLO 180° degree light polycarbonate square diffuser (lower) for AL-INS-FLO PROFILE	2m	polycarbonate UV-st.	frosted/opal	diffuser, certfyied UV stabilized material
	AB-INS-FLO1-3	new, FLO 180° degree light polycarbonate square diffuser (lower) for AL-INS-FLO PROFILE	3m	polycarbonate UV-st.	frosted/opal	diffuser, certfyied UV stabilized material
	AB-INS-FLO1-6.1	new, FLO 180° degree light polycarbonate square diffuser (lower) for AL-INS-FLO PROFILE	6,1m	polycarbonate UV-st.	frosted/opal	diffuser, certfyied UV stabilized material
	AL-INS-FLO-2	new, FLO PROFILE compatyble now with two NEW AB-FLO1, FLO2 diffusers to choice from, anodized in black	2m	anodized aluminum	black	no diffuser, need to be chosen from above list,
	AL-INS-FLO-3	new, FLO PROFILE compatyble now with two NEW AB-FLO1, FLO2 diffusers to choice from, anodized in black	3m	anodized aluminum	black	no diffuser, need to be chosen from above list,
	AL-INS-FLO-6.1	new, FLO PROFILE compatyble now with two NEW AB-FLO1, FLO2 diffusers to choice from, anodized in black	6,1m	anodized aluminum	black	no diffuser, need to be chosen from above list,
	EC-INS-FLO1-H3	End cap for diffuser AB-INS-FLO1 (lower diffuser), without cable hole, anodized in black	pcs	anodized aluminum	black	-
	EC-INS-FLO2-H3	End cap for diffuser AB-INS-FLO2 (higher diffuser), without cable hole, anodized in black	pcs	anodized aluminum	black	-
	LC-LIN	Linear connector	pcs	galvanized steel	silver	-
 ALU ROUND Ø24	AL-RO-2	ALU-Round Ø24, anodized in silver aluminum LED profile	2m	anodized aluminum	silver	no diffuser, needs to be chosen from below list,
	AL-RO-3	ALU-Round Ø24, anodized in silver aluminum LED profile	3m	anodized aluminum	silver	no diffuser, needs to be chosen from below list,
	AL-RO-6.1	ALU-Round Ø24, anodized in silver aluminum LED profile for future customer customize length cut	6,1m	anodized aluminum	silver	no diffuser, needs to be chosen from below list,
	EC-R2	ABS end cap for ALU-Round LED profile with cable hole	pcs	ABS	grey	promotion, valid till the end of the stock
	EC-R3	Aluminum end cap for ALU-Round LED profile w/out cable hole	pcs	aluminum	silver	-
	EC-R4	Aluminum end cap for ALU-Round LED profile with cable hole	pcs	aluminum	silver	-
	MC-R1	ABS mounting bracket for ALU-Round LED profile (0-180 degree/adj.)	pcs	ABS	grey	-
	MC-R2	Closet instalation mounting bracket for ALU-Round LED profile, anti-brake material	pcs	anti brake material	grey	-
	MC-R3	Intermediate closet support arm for Alu-Round LED profile	pcs	anodized aluminum	silver	-
	LC-RO	Aluminum linear connector for ALU-Round, compatible with Reutlinger cable suspension	pcs	aluminum	silver	-
	MC-RO-WA	Wall arm for Alu-Round LED profile	pcs	anodized aluminum	silver	-
	MC-RO-AA	Art Lighting arm for Alu-Round LED profile	pcs	anodized aluminum	silver	-
	TAPE-RO-WA	Supply cable hiding tape for Wall arm	pcs	PCV	silver	-
	TAPE-RO-AA	Supply cable hiding tape for Art Lighting arm	pcs	PCV	silver	-
	MC-CAB-1,6	Steel suspension cable 1,6m long with anchor, set of two	set	aluminum/steel	silver	-
	COLOUR-CAB-1,6	new, Cooled textile cable 2x075mm2, length 1,6m	pcs	cable	colour	-
	AB-RO-K2	Diffuser for Alu-Round profile,	2m	polycarbonate UV-st.	clear/transparent	diffuser, certfyied UV stabilized material
	AB-RO-M2	Diffuser for Alu-Round profile,	2m	polycarbonate UV-st.	frosted/opal	diffuser, certfyied UV stabilized material
	AB-RO-K3	Diffuser for Alu-Round profile,	3m	polycarbonate UV-st.	clear/transparent	diffuser, certfyied UV stabilized material
	AB-RO-K6.1	Diffuser for Alu-Round profile,	6,1m	polycarbonate UV-st.	clear/transparent	diffuser, certfyied UV stabilized material
	AB-RO-M3	Diffuser for Alu-Round profile,	3m	polycarbonate UV-st.	frosted/opal	diffuser, certfyied UV stabilized material
	AB-RO-M6.1	Diffuser for Alu-Round profile,	6,1m	polycarbonate UV-st.	frosted/opal	diffuser, certfyied UV stabilized material
	AB-RO-LK2	30 degree optic lens for Alu-Round profile, transparent, 2m long	2,02m	PMMA UV-st.	transparent	diffuser, certfyied UV stabilized material
	AB-RO-LK6.1	31 degree optic lens for Alu-Round profile, transparent, 6,1m long	6,1m	PMMA UV-st.	transparent	diffuser, certfyied UV stabilized material
	CUT-1	Quality 45/90/125 degree cut service	pcs	cut	profil/diffuser	extra service (option)
	MIL-1	Quality milling service	pcs	mill	profil	extra service (option)
	DRIL-1	Quality drilling service	pcs	dril	profil	extra service (option)

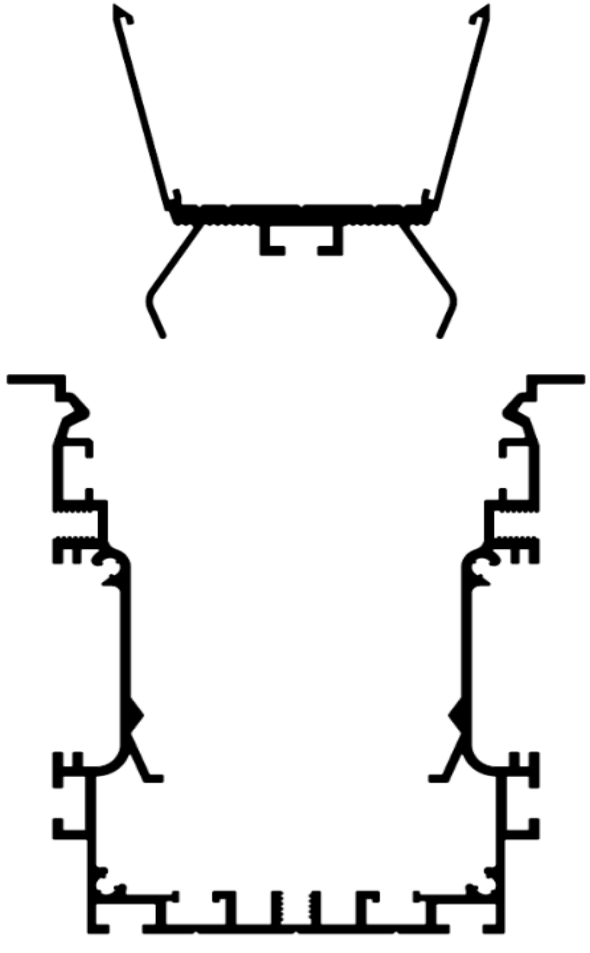
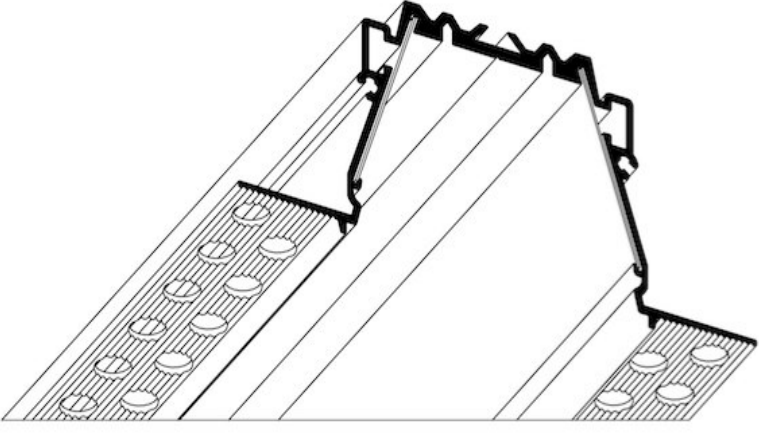

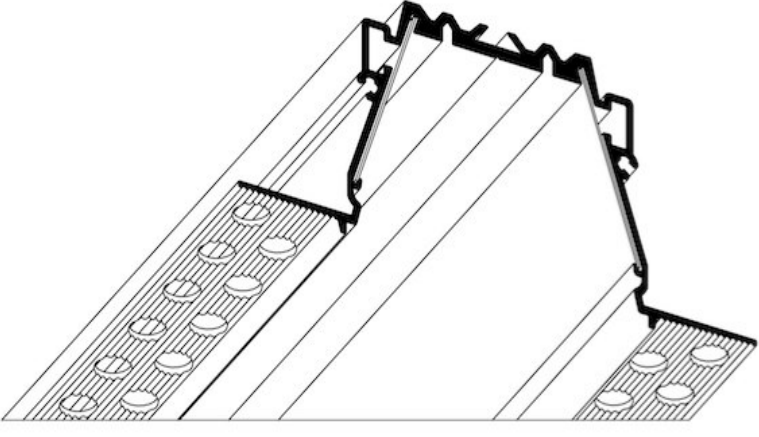



Item	Product code	Description	Dimmension	Material	Color	diffuser/lens type
 Alu-Round Ø38. FITS IN POWER SUPPLY 13X20mm, TCI Superslim	AL-RO38-2	Premium line ALU-Round Ø38, anodized in silver aluminum LED profile	2m	anodized aluminum	silver	no diffuser, needs to be chosen from below list
	AL-RO38-3	Premium line ALU-Round Ø38, anodized in silver aluminum LED profile	3m	anodized aluminum	silver	no diffuser, needs to be chosen from below list
	AL-RO38-6.1	Premium line ALU-Round Ø38, anodized in silver aluminum LED profile	6,1m	anodized aluminum	silver	no diffuser, needs to be chosen from below list
	LC-LIN	Linear connector	pcs	galvanized steel	silver	-
	90LC-HOR	90° degree horizontal connector	pcs	galvanized steel	silver	-
	90LC-VER	90° degree vertical connector	pcs	galvanized steel	silver	-
	120LC-VER	120° degree vertical connector	pcs	galvanized steel	silver	-
	EC-ROØ38-H1	new, Auminum end caps, anodized for RO Ø38 profile without cable hole	pcs	anodized aluminum	silver	-
	EC-ROØ38-H2	new, Auminum end caps, anodized for RO Ø38 profile with cable hole	pcs	anodized aluminum	silver	-
	MC-R3	Intermediate closet support arm for Alu-Round LED profile	pcs	anodized aluminum	silver	-
	MC-RO-WA	Wall arm for Alu-Round LED profile	pcs	anodized aluminum	silver	-
	MC-RO-AA	Art Lighting arm for Alu-Round LED profile	pcs	anodized aluminum	silver	-
	MC-RO-W2	new, Closet/wardrobe aluminum wall mounting end bracket	pcs	anodized aluminum	silver	-
	AB-SLW-K2	Diffuser for SLW8, RSLW8, SLW15, Alu-Ceiling, RO38, WLL series profiles	2m	polycarbonate UV-st.	clear/transparent	diffuser, certfyied UV stabilized material
	AB-SLW-K6.1	Diffuser for SLW8, RSLW8, SLW15, Alu-Ceiling, RO38, WLL series profiles	6,1m	polycarbonate UV-st.	clear/transparent	diffuser, certified UV stabilized material
	AB-SLW-50M2	Diffuser for SLW8, RSLW8, SLW15, Alu-Ceiling, RO38, WLL series profiles	2m	polycarbonate UV-st.	50% frosted/opal	diffuser, certified UV stabilized material
	AB-SLW-50M6.1	Diffuser for SLW8, RSLW8, SLW15, Alu-Ceiling, RO38, WLL series profiles	6,1m	polycarbonate UV-st.	50% frosted/opal	diffuser, certified UV stabilized material
	AB-SLW-M2	Diffuser for SLW8, RSLW8, SLW15, Alu-Ceiling, RO38, WLL series profiles	2m	polycarbonate UV-st.	frosted/opal	diffuser, certified UV stabilized material
	AB-SLW-M3	Diffuser for SLW8, RSLW8, SLW15, Alu-Ceiling, RO38, WLL series profiles	3m	polycarbonate UV-st.	frosted/opal	diffuser, certified UV stabilized material
	AB-SLW-M6.1	Diffuser for SLW8, RSLW8, SLW15, Alu-Ceiling, RO38, WLL series profiles	6,1m	polycarbonate UV-st.	frosted/opal	diffuser, certified UV stabilized material
 PREMIUM LINE PROFILES Alu-Round Ø52 with reflector. FITS IN STANDARD POWER SUPPLY 21X31mm	CUT-1	Quality 45/90/125 degree cut service	pcs	cut	profil/diffuser	extra service (option)
	MIL-1	Quality milling service	pcs	mill	profil	extra service (option)
	DRIL-1	Quality drilling service	pcs	dril	profil	extra service (option)
	AL-RO52-2	Premium line ALU-Round Ø52, anodized in silver aluminum LED profile with the light reflector	2m	anodized aluminum	silver	no diffuser (1x), no reflector (2x) needs to be chosen from below list
	AL-RO52-3	Premium line ALU-Round Ø52, anodized in silver aluminum LED profile with the light reflector	3m	anodized aluminum	silver	no diffuser (1x), no reflector (2x) needs to be chosen from below list
	AL-RO52-6.1	Premium line ALU-Round Ø52, anodized in silver aluminum LED profile with the light reflector	6,1m	anodized aluminum	silver	no diffuser (1x), no reflector (2x) needs to be chosen from below list
	AL-REF-13-2	Light reflector Vega95 width 13mm for ALU-Round Ø52, Epoxy2 LED profile, length 1985mm	1,98m	reflector Vega 95	reflector	light reflector (need 2x), increase the profile efficiency by 20%
	AL-REF-13-3	Light reflector Vega95 width 13mm for ALU-Round Ø52, Epoxy2 LED profile, length 2985mm	2,98m	reflector Vega 95	reflector	light reflector (need 2x), increase the profile efficiency by 20%
	LC-LIN	Linear connector	pcs	galvanized steel	silver	-
	90LC-HOR	90° degree horizontal connector	pcs	galvanized steel	silver	-
	90LC-VER	90° degree vertical connector	pcs	galvanized steel	silver	-
	120LC-VER	120° degree vertical connector	pcs	galvanized steel	silver	-
	EC-ROØ52-H1	new, Aluminum end caps, anodized for RO Ø52 profile without cable hole	pcs	anodized aluminum	silver	-
	EC-ROØ52-H2	new, Aluminum end caps, anodized for RO Ø52 profile without cable hole	pcs	anodized aluminum	silver	-
	AB-RO52-M2	Satin matt finish opal diffuser for ROØ52 led profile	2m	polycarbonate UV-st.	satin/opal	diffuser, certified UV stabilized material
	AB-RO52-K2	Satin matt finish transparent diffuser for ROØ52 profile	2m	polycarbonate UV-st.	satin/clear	diffuser, certified UV stabilized material
	AB-RO52-M3	Satin matt finish opal diffuser for RO52 led profile	3m	polycarbonate UV-st.	satin/opal	diffuser, certified UV stabilized material
	AB-RO52-K3	Satin matt finish transparent diffuser for ROØ52 profile	3m	polycarbonate UV-st.	satin/clear	diffuser, certified UV stabilized material
	AB-RO52-M6.1	Satin matt finish opal diffuser for RO52 led profile	6,1m	polycarbonate UV-st.	satin/opal	diffuser, certified UV stabilized material
 NEW, RO-360, Fi60 lighting tube profile, IS REQUIRING SUSPENSION CABLE EVERY 1200MM TO PREVENT BENDING OF THE PROFILE	CUT-1	Quality 45/90/125 degree cut service	pcs	cut	profil/diffuser	extra service (option)
	MIL-1	Quality milling service	pcs	mill	profil	extra service (option)
	DRIL-1	Quality drilling service	pcs	dril	profil	extra service (option)
	AL-RO360-2	new, ALU 360 degree lighting for Ø60 lighting tube, leds dots free, heavy duty anodized in silver aluminum LED profile	2m	anodized aluminum	silver	no diffuser (1x), needs to be chosen from below list,
	AL-RO360-3	new, ALU 360 degree lighting for Ø60 lighting tube, leds dots free, heavy duty anodized in silver aluminum LED profile	3m	anodized aluminum	silver	no diffuser (1x), needs to be chosen from below list,
	AL-RO360-6.1	new, ALU 360 degree lighting for Ø60 lighting tube, leds dots free, heavy duty anodized in silver aluminum LED profile	6,1m	anodized aluminum	silver	no diffuser (1x), needs to be chosen from below list,
	EC-RO360-H3	new, Aluminum end caps, anodized for RO360 profile without cable hole	pcs	anodized aluminum	silver	-
	EC-RO360-VER	new, Aluminum end caps, anodized for RO360 profile without cable hole	pcs	anodized aluminum	silver	-
	MC-CAB-1,6	Steel suspension cable 1,6m long with anchor, set of two	set	aluminum/steel	silver	-
	COLOUR-CAB-1,6	new, Coloured textil cable 2x075mm2, length 1,6m	pcs	cable	colour	-
	AB-RO360-M2	new, PMMA satin mat finish Ø60 LED tube, LEDs dots free	2m	PPMA, satin finish, UV-st.	satin/opal	Ø60 LED tube, certified UV stabilized material
	AB-RO360-M3	new, PMMA satin mat finish Ø60 LED tube, LEDs dots free	3m	PPMA, satin finish, UV-st.	satin/opal	Ø60 LED tube, certified UV stabilized material
	AB-RO360-M6.1	new, PMMA satin mat finish Ø60 LED tube, LEDs dots free	6,1m	PPMA, satin finish, UV-st.	satin/opal	Ø60 LED tube, certified UV stabilized material
	CUT-1	Quality 45/90/125 degree cut service	pcs	cut	profil/diffuser	extra service (option)
	MIL-1	Quality milling service	pcs	mill	profil	extra service (option)
	DRIL-1	Quality drilling service	pcs	dril	profil	extra service (option)
 PLA 35x35mm	AL-PLA-2	PowerLine 35mm, anodized in silver, aluminum LED profile, suitable for aluminum end caps	2m	anodized aluminum	silver	no diffuser, needs to be chosen from below list,
	AL-PLA-3	PowerLine 35mm, anodized in silver, aluminum LED profile, suitable for aluminum end caps	3m	anodized aluminum	silver	no diffuser, needs to be chosen from below list,
	AL-PLA-6.1	PowerLine 35mm, aluminum LED profile, suitable for aluminum end caps for future customer customize length cut	6,1m	anodized aluminum	silver	no diffuser, needs to be chosen from below list,
	AL-MAS-6.1	Blank aluminum diffuser for hiding power supply, suitable for PL35, PLA, RPLA,SPL profiles	6,1m	anodized aluminum	silver	Blank aluminum diffuser,
	LC-PLA	Aluminum linear connector for (PLA) LED profile	pcs	aluminum	silver	-
	90LC-PLA	90° degree aluminum connector for (PLA) LED profile	pcs	aluminum	silver	-
	EC-PLA	Aluminum end cap for (PLA) LED profile, w/out cable hole	pcs	aluminum	silver	-
	MC-CAB-1,6	Steel suspension cable 1,6m long with anchor, set of two	set	aluminum/steel	silver	-
	COLOUR-CAB-1,6	new, Cooled textil cable 2x075mm2, length 1,6m	pcs	cable	colour	-
	30-DURIS-WW	Double row constant voltage Rigid FR-4 with Osram Duris E5 LEDs, 24V, CC driver on board, 11,6W, 3pcs/m	1pcs	Osram Duris E5	2700°K	POWERED BY  LED CHIPS
	30-DURIS-NW	Double row constant voltage Rigid FR-4 with Osram Duris E5 LEDs, 24V, CC driver on board, 11,6W, 3pcs/m	1pcs	Osram Duris E5	4000°K	
	30-DURIS-CW	Double row constant voltage Rigid FR-4 with Osram Duris E5 LEDs, 24V, CC driver on board, 11,6W, 3pcs/m	1pcs	Osram Duris E5	5000°K	
	CUT-1	Quality 45/90/125 degree cut service	pcs	cut	profil/diffuser	extra service (option)
	MIL-1	Quality milling service	pcs	mill	profil	extra service (option)
	DRIL-1	Quality drilling service	pcs	dril	profil	extra service (option)


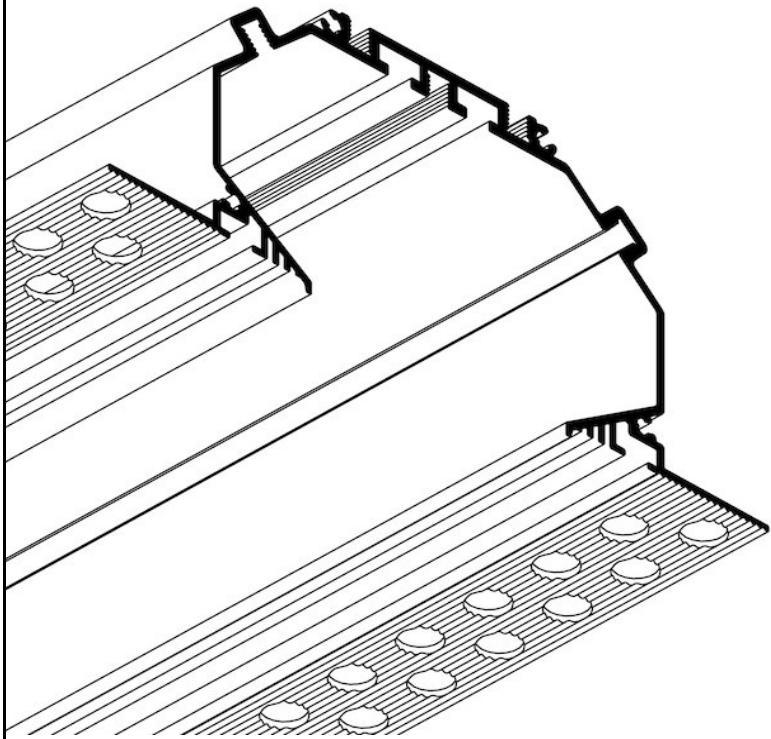
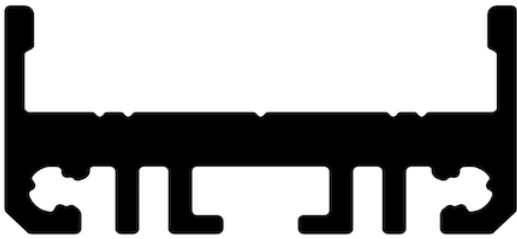
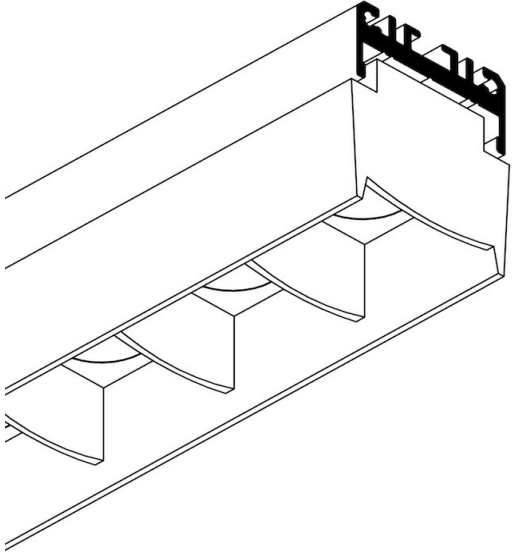
Item	Product code	Description	Dimmension	Material	Color	diffuser/lens type
 RPLA 44x35mm	AL-RPLA-2	Recessed PowerLine 35mm, anodized in silver LED profile, suitable for aluminum end caps	2m	anodized aluminum	silver	no diffuser, needs to be chosen from below list,
	AL-RPLA-3	Recessed PowerLine 35mm, anodized in silver LED profile, suitable for aluminum end caps	3m	anodized aluminum	silver	no diffuser, needs to be chosen from below list,
	AL-RPLA-6.1	Recessed PowerLine 35mm, LED profile, suitable for aluminum end caps for future customer customize length cut	6,1m	anodized aluminum	silver	no diffuser, needs to be chosen from below list,
	AL-MAS-6.1	Blank aluminum diffuser for hiding power supply, suitable for PL35, RPL35, PLA, RPLA,SPL profiles	6,1m	anodized aluminum	silver	Blank aluminum diffuser,
	AL-RPLA-3 RAL	RAL9003 Recessed PowerLine 35mm, RAL9003 LED profile, suitable for aluminum end caps	3m	aluminum	RAL9003	no diffuser, need to be chosen from below list
	AL-MAS-3 RAL	RAL9003 blank aluminum diffuser for hiding power supply good for PL35, RPL35, PLA, RPLA, SPL	3m	aluminum	RAL9003	no diffuser, need to be chosen from below list
	LC-RPLA	Aluminum linear connector for (RPLA) LED profile	pcs	aluminum	silver	-
	EC-RPLA	Aluminum end cap for RPLA w/out cable hole	pcs	aluminum	silver	-
	MC-RPLA	Mounting bracket for gypsum ceiling instalation for RPLA LED profile	pcs	steel	silver	-
	30-DURIS-WW	Double row constant voltage Rigid FR-4 with Osram Duris E5 LEDs, 24V, CC driver on board, 11,6W, 3pcs/m	1pcs	Osram Duris E5	2700°K	POWERED BY  LED CHIPS
	30-DURIS-NW	Double row constant voltage Rigid FR-4 with Osram Duris E5 LEDs, 24V, CC driver on board, 11,6W, 3pcs/m	1pcs	Osram Duris E5	4000°K	
	30-DURIS-CW	Double row constant voltage Rigid FR-4 with Osram Duris E5 LEDs, 24V, CC driver on board, 11,6W, 3pcs/m	1pcs	Osram Duris E5	5000°K	
	CUT-1	Quality 45/90/125 degree cut service	pcs	cut	profil/diffuser	extra service (option)
	MIL-1	Quality milling service	pcs	mill	profil	extra service (option)
	DRIL-1	Quality drilling service	pcs	dril	profil	extra service (option)
 PREMIUM LINE PROFILES RPL35 FL 35x49mm, with 95% efficiency light reflector, efficiency is +20% twith the sides reflectors	AL-RPL35FL-2	Premium Line Recess Power Line 35 FL, anodized in silver aluminum led profile 35x49mm with the light reflector Vega95	2m	anodized aluminum	silver	no diffuser (1x), no reflector (2x) needs to be chosen from below list
	AL-RPL35FL-3	Premium Line Recess Power Line 35 FL, anodized in silver aluminum led profile 35x49mm with the light reflector Vega95	3m	anodized aluminum	silver	no diffuser (1x), no reflector (2x) needs to be chosen from below list
	AL-RPL35FL-6.1	Premium Line Recess Power Line 35 FL, anodized in silver aluminum led profile 35x49mm with the light reflector Vega95	6,1m	anodized aluminum	silver	no diffuser (1x), no reflector (2x) needs to be chosen from below list
	AL-REF25-B20-2	Light reflector Vega95 width 25mm, bent 20° degree for RPL35 FL, DPL35 FL series LED profile, length 1985mm	1,98m	reflector Vega 95	reflector	light reflector (need 2x) compatible with RPL35 FL profile
	AL-REF25-B20-3	Light reflector Vega95 width 25mm, bent 20° degree for RPL35 FL, DPL35 FL series LED profile, length 2985mm	2,98m	reflector Vega 95	reflector	light reflector (need 2x) compatible with RPL35 FL profile
	LC-LIN	Linear connector	pcs	galvanized steel	silver	-
	90LC-HOR	90° degree horizontal connector	pcs	galvanized steel	silver	-
	MC-SPR-A	new, Spring bracket (small) for RPL35 FL, RSLW20 FL led profile, 2pcs set	2 pcs set	stainless steel	silver	-
	EC-RPL35 FL	new, Auminum end caps, anodized for RPL35 FL profile	pcs	anodized aluminum	silver	-
	17-DURIS-WW	Double row constant voltage Rigid FR-4 with Osram Duris E5 LEDs, 24V, CC driver on board, 11,6W, 3pcs/m	1pcs	Osram Duris E5	2700°K	POWERED BY  LED CHIPS
	17-DURIS-NW	Double row constant voltage Rigid FR-4 with Osram Duris E5 LEDs, 24V, CC driver on board, 11,6W, 3pcs/m	1pcs	Osram Duris E5	4000°K	
	17-DURIS-CW	Double row constant voltage Rigid FR-4 with Osram Duris E5 LEDs, 24V, CC driver on board, 11,6W, 3pcs/m	1pcs	Osram Duris E5	5000°K	
	CUT-1	Quality 45/90/125 degree cut service	pcs	cut	profil/diffuser	extra service (option)
	MIL-1	Quality milling service	pcs	mill	profil	extra service (option)
	DRIL-1	Quality drilling service	pcs	dril	profil	extra service (option)
 PL35S, 40x35mm	AL-PL35S-2	Wall instaled LED profile, one side light out, PL35S, anodized in silver	2m	anodized aluminum	silver	no diffuser, needs to be chosen from below list,
	EC-PL35S-L	Aluminum end cap for PL35S LED profile w/out cable hole, left	pcs	aluminum	silver	-
	EC-PL35S-R	Aluminum end cap for PL35S LED profile w/out cable hole, right	pcs	aluminum	silver	-
	AL-BA-2	Aluminum hiding/mounting base for PLS35S LED profile	2m	anodized aluminum	silver	-
	EC-BA-H1	Aluminum end cap for hiding/mounting base (BA)	pcs	aluminum	silver	-
	AL-BAS-2	Aluminum mounting base (small) for wall installed SLW20B LED Lamp	2m	anodized aluminum	silver	-
	EC-BAS	Aluminum end cap for (small) mounting base	pcs	aluminum	silver	-
	30-DURIS-WW	Double row constant voltage Rigid FR-4 with Osram Duris E5 LEDs, 24V, CC driver on board, 11,6W, 3pcs/m	1pcs	Osram Duris E5	2700°K	POWERED BY  LED CHIPS
	30-DURIS-NW	Double row constant voltage Rigid FR-4 with Osram Duris E5 LEDs, 24V, CC driver on board, 11,6W, 3pcs/m	1pcs	Osram Duris E5	4000°K	
	30-DURIS-CW	Double row constant voltage Rigid FR-4 with Osram Duris E5 LEDs, 24V, CC driver on board, 11,6W, 3pcs/m	1pcs	Osram Duris E5	5000°K	
	CUT-1	Quality 45/90/125 degree cut service	pcs	cut	profil/diffuser	extra service (option)
	MIL-1	Quality milling service	pcs	mill	profil	extra service (option)
	DRIL-1	Quality drilling service	pcs	dril	profil	extra service (option)
 PL35D, 40x35mm	AL-PL35D-2	Wall instaled LED profile, two side light out; PL35D, anodized in silver	2m	anodized aluminum	silver	no diffuser(2x), needs to be chosen from below list,
	EC-PL35D	Aluminum end cap for PL35D LED profile w/out cable hole	pcs	aluminum	silver	-
	AL-BA-2	Aluminum hiding/mounting base for PLS35S LED profile	2m	anodized aluminum	silver	-
	EC-BA-H1	Aluminum end cap for hiding/mounting base (BA)	pcs	aluminum	silver	-
	AL-BAS-2	Aluminum mounting base (small) for wall installed SLW20B LED Lamp	2m	anodized aluminum	silver	-
	EC-BAS	Aluminum end cap for (small) mounting base	pcs	aluminum	silver	-
	30-DURIS-WW	Double row constant voltage Rigid FR-4 with Osram Duris E5 LEDs, 24V, CC driver on board, 11,6W, 3pcs/m	1pcs	Osram Duris E5	2700°K	POWERED BY  LED CHIPS
	30-DURIS-NW	Double row constant voltage Rigid FR-4 with Osram Duris E5 LEDs, 24V, CC driver on board, 11,6W, 3pcs/m	1pcs	Osram Duris E5	4000°K	
	30-DURIS-CW	Double row constant voltage Rigid FR-4 with Osram Duris E5 LEDs, 24V, CC driver on board, 11,6W, 3pcs/m	1pcs	Osram Duris E5	5000°K	
	CUT-1	Quality 45/90/125 degree cut service	pcs	cut	profil/diffuser	extra service (option)
	MIL-1	Quality milling service	pcs	mill	profil	extra service (option)
	DRIL-1	Quality drilling service	pcs	dril	profil	extra service (option)



Item	Product code	Description	Dimmension	Material	Color	diffuser/lens type
 <p>PREMIUM LINE PROFILES SPL FL 35x35mm, with 95% efficiency light reflector, efficiency is +20% with the sides reflectors</p>	AL-SPL-FL-2	Premium Line SPL35 FL, anodized in silver aluminum led profile 35x35mm suitable with the light reflector Vega95	2m	anodized aluminum	silver	no diffuser (1x), no reflector (2x) needs to be chosen from below list,
	AL-SPL-FL-3	Premium Line SPL35 FL, anodized in silver aluminum led profile 35x35mm suitable with the light reflector Vega95	3m	anodized aluminum	silver	no diffuser (1x), no reflector (2x) needs to be chosen from below list,
	AL-SPL-FL-6.1	Premium Line SPL35 FL, anodized in silver aluminum led profile 35x35mm suitable with the light reflector Vega95	6,1m	anodized aluminum	silver	no diffuser (1x), no reflector (2x) needs to be chosen from below list,
	AL-SPLB-FL-6.1	Premium Line SPL35 FL, anodized in BLACK aluminum led profile 35x35mm suitable with the light reflector Vega96	6,1m	anodized aluminum	black	no diffuser (1x), no reflector (2x) needs to be chosen from below list,
	AL-MAS-3	Blank aluminum diffuser for hiding power supply, good for PL35, RPL35, PLA, RPLA, SPL, SPL FL, RPL35 FL, DPL35FL	3m	anodized aluminum	silver	blank aluminum diffuser
	AL-REF25-B50-2	Light reflector Vega95 width 25mm, bent 50° degree for SPL FL, RSLW20 FL, SLW20 FL series LED profile, length 1985mm	1,98m	reflector Vega 95	reflector	light reflector (need 2x), increase the profile efficiency by 20%
	AL-REF25-B50-3	Light reflector Vega95 width 25mm, bent 50° degree for SPL FL, RSLW20 FL, SLW20 FL series LED profile, length 2985mm	2,98m	reflector Vega 95	reflector	light reflector (need 2x), increase the profile efficiency by 20%
	EC-SPL	Aluminum end cap for SPL led profile without cable hole	pcs	aluminum	silver	-
	LC-LIN	Linear connector	pcs	galvanized steel	silver	-
	90LC-HOR	90° degree horizontal connector	pcs	galvanized steel	silver	-
	90LC-VER	90° degree vertical connector	pcs	galvanized steel	silver	-
	MC-SPL-SUR	new , Surface installation mounting bracket for SPL series led profiles	pcs	galvanized spring steel	silver	-
	MC-LOCK	Security steel cable with lock for trimless installed mounting brackets	pcs	steel cable	silver	security cable (1) attached to the bracket & lamp
	MC-SPL	Gypsum ceiling Trimless installation mounting bracket for SPL led profile	pcs	galvanized steel	silver	gypsum ceiling trimless installation accessories
	MC-SPL-MAG	Gypsum ceiling Trimless installation magnetic mounting bracket (set) for SPL led profile	set	galvanized steel	silver	incl. magnetic pads (1), mounting bracket(1), security cable(1)
	MC- KEY-SPL	Positioning key for trimless base installation for SPL led profile	pcs	galvanized steel	silver	tool to positioning the installation base, need at list two per m
	MC-CAB-1,6	Steel suspension cable 1,6m long with anchor, set of two	set	aluminum/steel	silver	set of two
	30-DURIS-WW	Double row constant voltage Rigid FR-4 with Osram Duris E5 LEDs, 24V, CC driver on board, 11,6W, 3pcs/m	1pcs	Osram Duris E5	2700°K	POWERED BY  LED CHIPS
	30-DURIS-NW	Double row constant voltage Rigid FR-4 with Osram Duris E5 LEDs, 24V, CC driver on board, 11,6W, 3pcs/m	1pcs	Osram Duris E5	4000°K	
	30-DURIS-CW	Double row constant voltage Rigid FR-4 with Osram Duris E5 LEDs, 24V, CC driver on board, 11,6W, 3pcs/m	1pcs	Osram Duris E5	5000°K	
	CUT-1	Quality 45/90/125 degree cut service	pcs	cut	profil/diffuser	extra service (option)
	MIL-1	Quality milling service	pcs	mill	profil	extra service (option)
	DRIL-1	Quality drilling service	pcs	dril	profil	extra service (option)
 <p>SPL, 35x35mm</p>	AL-SPL-2	Power Line 35 smooth, anodized in silver aluminum led profile 35x35mm	2m	anodized aluminum	silver	no diffuser, needs to be chosen from below list,
	AL-SPL-3	Power Line 35 smooth, anodized in silver aluminum led profile 35x35mm	3m	anodized aluminum	silver	no diffuser, needs to be chosen from below list,
	AL-SPL-6.1	Power Line 35 smooth, anodized in silver aluminum led profile for future customer customize length cut	6,1m	aluminum	silver	no diffuser, needs to be chosen from below list,
	AL-MAS-3	Blank aluminum diffuser for hiding power supply, good for PL35, RPL35, PLA, RPLA, SPL	3m	aluminum	silver	Blank aluminum diffuser
	AL-SPL-3 RAL	RAL9003 Power Line 35 smooth, powder coat painted for RAL9003 led profile 35x35mm	3m	aluminum	RAL9003	no diffuser, needs to be chosen from below list,
	AL-MAS-3 RAL	RAL9003 blank aluminum diffuser for hiding power supply good for PL35, RPL35, PLA, RPLA, SPL	3m	aluminum	RAL9003	Blank aluminum diffuser
	EC-SPL-RAL	Aluminum end cap for SPL led profile in white RAL9003 without cable hole	pcs	aluminum	RAL9003	-
	EC-SPL	Aluminum end cap for SPL led profile without cable hole	pcs	aluminum	silver	-
	LC-LIN	Linear connector	pcs	galvanized steel	silver	-
	90LC-HOR	90° degree horizontal connector	pcs	galvanized steel	silver	-
	90LC-VER	90° degree vertical connector	pcs	galvanized steel	silver	-
	MC-SPL	Gypsum ceiling Trimless installation mounting bracket for SPL led profile	pcs	galvanized steel	silver	gypsum ceiling trimless installation accessories
	MC-SPL-MAG	Gypsum ceiling Trimless installation magnetic mounting bracket (set) for SPL led profile	set	galvanized steel	silver	incl. magnetic pads (1), mounting bracket(1), security cable(1)
	MC-SPL-SUR	new , Surface installation mounting bracket for SPL series led profiles	pcs	galvanized spring steel	silver	-
	MC-LOCK	Security steel cable with lock for trimless installed mounting brackets	pcs	steel cable	silver	security cable (1) attached to the bracket
	MC- KEY-SPL	Positioning key for trimless base installation for SPL led profile	pcs	galvanized steel	silver	tool to positioning the installation base, need at list two per m
	MC-CAB-1,6	Steel suspension cable 1,6m long with anchor, set of two	set	aluminum/steel	silver	set of two
	17-DURIS-WW	Double row constant voltage Rigid FR-4 with Osram Duris E5 LEDs, 24V, CC driver on board, 11,6W, 3pcs/m	1pcs	Osram Duris E5	2700°K	POWERED BY  LED CHIPS
	17-DURIS-NW	Double row constant voltage Rigid FR-4 with Osram Duris E5 LEDs, 24V, CC driver on board, 11,6W, 3pcs/m	1pcs	Osram Duris E5	4000°K	
	17-DURIS-CW	Double row constant voltage Rigid FR-4 with Osram Duris E5 LEDs, 24V, CC driver on board, 11,6W, 3pcs/m	1pcs	Osram Duris E5	5000°K	
	CUT-1	Quality 45/90/125 degree cut service	pcs	cut	profil/diffuser	extra service (option)
	MIL-1	Quality milling service	pcs	mill	profil	extra service (option)
	DRIL-1	Quality drilling service	pcs	dril	profil	extra service (option)
 <p>SPL LOUVER, 35x35mm</p>	AL-SPL-2	Power Line 35 smooth, anodized in silver aluminum led profile 35x35mm	2m	anodized aluminum	silver	no Louver 60°, needs to be chosen from below list,
	AL-SPL-3	Power Line 35 smooth, anodized in silver aluminum led profile 35x35mm	3m	anodized aluminum	silver	no Louver 60°, needs to be chosen from below list,
	AL-SPL-3 RAL	RAL9003 Power Line 35 smooth, powder coat painted for RAL9003 led profile 35x35mm	3m	aluminum	RAL9003	no Louver 60°, needs to be chosen from below list,
	AL-SPL-6.1	Power Line 35 smooth, anodized in silver aluminum led profile for future customer customize length cut	6,1m	aluminum	silver	no Louver 60°, needs to be chosen from below list,
	EC-SPL	Aluminum end cap for SPL led profile without cable hole	pcs	aluminum	silver	-
	EC-SPL-RAL	Aluminum end cap for SPL led profile in white RAL9003 without cable hole	pcs	aluminum	RAL9003	-
	LC-LIN	Linear connector	pcs	galvanized steel	silver	-
	90LC-HOR	90° degree horizontal connector	pcs	galvanized steel	silver	-
	MC-CAB-1,6	Steel suspension cable 1,6m long with anchor, set of two	set	aluminum/steel	silver	set of two
	MC-SPL-SUR	new , Surface installation mounting bracket for SPL series led profiles	pcs	galvanized spring steel	silver	-
	Louver 60°-338	new , Louver 60 degree for SPL profile, silver mat finish, length 338mm, beginning & end part	pcs	anodized aluminum	silver mat	Spare Louver 60° degree for SPL profile, aluminum mat finish
	Louver 60°-654	new , Louver 60 degree for SPL profile, silver mat finish, length 654mm, middle part	pcs	anodized aluminum	silver mat	Spare Louver 60° degree for SPL profile, aluminum mat finish
	17-DURIS-WW	Double row constant voltage Rigid FR-4 with Osram Duris E5 LEDs, 24V, CC driver on board, 11,6W, 3pcs/m	1pcs	Osram Duris E5	2700°K	POWERED BY  LED CHIPS
	17-DURIS-NW	Double row constant voltage Rigid FR-4 with Osram Duris E5 LEDs, 24V, CC driver on board, 11,6W, 3pcs/m	1pcs	Osram Duris E5	4000°K	
	17-DURIS-CW	Double row constant voltage Rigid FR-4 with Osram Duris E5 LEDs, 24V, CC driver on board, 11,6W, 3pcs/m	1pcs	Osram Duris E5	5000°K	
	CUT-1	Quality 45/90/125 degree cut service	pcs	cut	profil/diffuser	extra service (option)
	MIL-1	Quality milling service	pcs	mill	profil	extra service (option)
	DRIL-1	Quality drilling service	pcs	dril	profil	extra service (option)
 <p>CEILING WASHER, 30,3x71mm</p>	AL-CEW-2	Wall installed two side light output ALU CEILING WASHER LED profile	2m	anodized aluminum	silver	no diffuser, need to be chosen from below list
	AL-CEW-3	Wall installed two side light output ALU CEILING WASHER LED profile	3m	anodized aluminum	silver	no diffuser, need to be chosen from below list
	AL-CEW-6.1	Wall installed two side light output ALU CEILING WASHER LED profile	6,1m	anodized aluminum	silver	no diffuser, need to be chosen from below list
	LC-LIN	Linear connector	pcs	galvanized steel	silver	-
	90LC-HOR	90° degree horizontal connector	pcs	galvanized steel	silver	-
	EC-CEW-L	Aluminum end caps for profile ALU CEILING WASHER without cable hole	pcs	aluminum	silver	-
	EC-CEW-R	Aluminum end caps for profile ALU CEILING WASHER without cable hole	pcs	aluminum	silver	-
	AB-SS-M2	Diffuser for Alu-Swiss profile,	2m	polycarbonate UV-st.	frosted/opal	diffuser, certified UV stabilized material
	AB-SS-M3	Diffuser for Alu-Swiss profile,	3m	polycarbonate UV-st.	frosted/opal	diffuser, certified UV stabilized material
	AB-PL-M2	Diffuser for PL, PLA, RPL, RPLA, PL35S, PL35D, SPL series profiles,	2m	polycarbonate UV-st.	frosted/opal	diffuser, certified UV stabilized material
	AB-PL-M3	Diffuser for PL, PLA, RPL, RPLA, PL35S, PL35D, SPL series profiles,	3m	polycarbonate UV-st.	frosted/opal	diffuser, certified UV stabilized material
	CUT-1	Quality 45/90/125 degree cut service	pcs	cut	profil/diffuser	extra service (option)
	MIL-1	Quality milling service	pcs	mill	profil	extra service (option)
	DRIL-1	Quality drilling service	pcs	dril	profil	extra service (option)


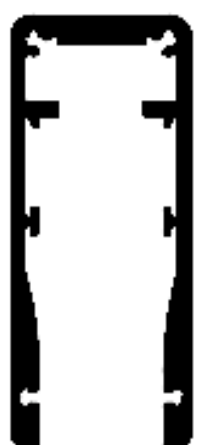
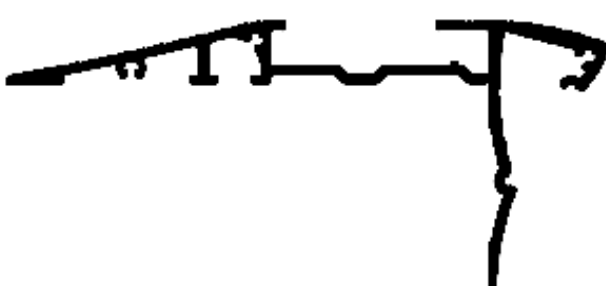
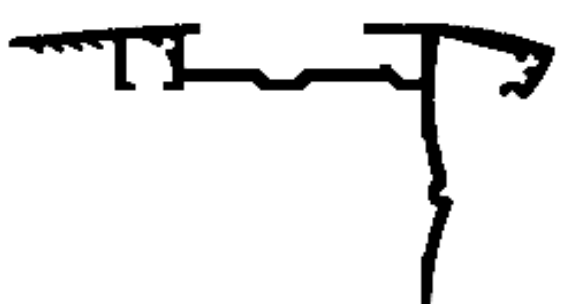
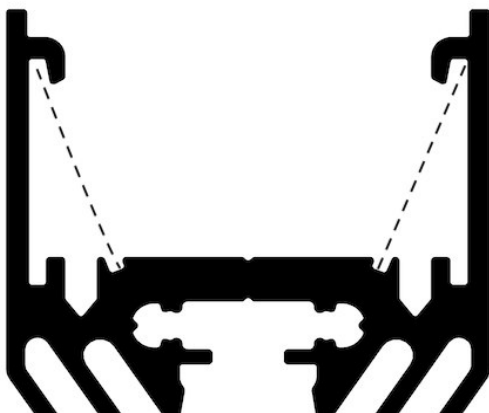
Item	Product code	Description	Dimmension	Material	Color	diffuser/lens type
 <p>PREMIUM LINE PROFILES DPL35 FL 35x58mm, with 95% efficiency light reflector, efficiency is +20% ↑with the sides reflectors</p>	AL-DPL35 FL-2	Surface, pendant, double side light output, DPL35 FL aluminum LED profile with Vega95 light reflector , increase efficiency +20%	2m	anodized aluminum	silver	no diffuser (2x), no reflector (2x) needs to be chosen from below list
	AL-DPL35 FL-3	Surface, pendant, double side light output, DPL35 FL aluminum LED profile with Vega95 light reflector , increase efficiency +20%	3m	anodized aluminum	silver	no diffuser (2x), no reflector (2x) needs to be chosen from below list
	AL-DPL35 FL-6.1	Surface, pendant, double side light output, DPL35 FL aluminum LED profile with Vega95 light reflector , increase efficiency +20%	6,1m	anodized aluminum	silver	no diffuser (2x), no reflector (2x) needs to be chosen from below list
	AL-MAS-6.1	Blank aluminum diffuser for hiding power supply, suitable for PL35, RPL35, PLA, RPLA,SPL profiles	6,1m	anodized aluminum	silver	Blank aluminum diffuser,
	AL-REF25-B20-2	Light reflector Vega95 width 25mm, bent 20° degree for RPL35 FL, DPL35 FL series LED profile, length 1985mm	1,98m	reflector Vega 95	reflector	light reflector (need 2x) compatible with RPL35 FL, DPL35 FL profile
	AL-REF25-B20-3	Light reflector Vega95 width 25mm, bent 20° degree for RPL35 FL, DPL35 FL series LED profile, length 2985mm	2,98m	reflector Vega 95	reflector	light reflector (need 2x) compatible with RPL35 FL, DPL35 FL profile
	EC-DPL35 FL	new , Aluminum end caps for DPL35 FL LED profile, without cable hole	pcs	anodized aluminum	silver	-
	LC-LIN	Linear connector	pcs	galvanized steel	silver	-
	90LC-HOR	90° degree horizontal connector	pcs	galvanized steel	silver	-
	90LC-VER	90° degree vertical connector	pcs	galvanized steel	silver	-
	120LC-VER	120° degree vertical connector	pcs	galvanized steel	silver	-
	MC-CAB-1,6	Steel suspension cable 2m long with anchor, set of two	set	aluminum/steel	silver	set of two
	CUT-1	Quality 45/90/125 degree cut service	pcs	cut	profil/diffuser	extra service (option)
	MIL-1	Quality milling service	pcs	mill	profil	extra service (option)
	DRIL-1	Quality drilling service	pcs	dril	profil	extra service (option)
 <p>NEW, Plaster Board profile, 34x75mm, RPL35 US, efficiency is +20% ↑with the sides reflectors</p>	AL-RPL35US-2	new , Plaster board profile, RPL35FL US for TRIMLESS INSTALLATION, recess, RAW aluminum, suitable with the light reflector Vega95 (increases light output+20%)	2m	RAW aluminum	silver	no diffuser, need to be chosen from below list,
	AL-RPL35US-3	new , Plaster board profile, RPL35FL US for TRIMLESS INSTALLATION, recess, RAW aluminum, suitable with the light reflector Vega95 (increases light output+20%)	3m	RAW aluminum	silver	no diffuser, need to be chosen from below list,
	AL-RPL35US-6.1	new , Plaster board profile, RPL35FL US for TRIMLESS INSTALLATION, recess, RAW aluminum, suitable with the light reflector Vega95 (increases light output+20%)	6,1m	RAW aluminum	silver	no diffuser, need to be chosen from below list,
	EC-RPL35US-H3	End cap for plaster board profile RPL35US, without cable hole	pcs	RAW aluminum	silver	-
	AL-REF25-B50-2	Light reflector Vega95 width 25mm, bent 50° degree for SPL FL, RSLW20 FL, SLW20 FL series LED profile, length 1985mm	1,98m	reflector Vega 95	reflector	light reflector (need 2x), increase the profile efficiency by 20%
	AL-REF25-B50-3	Light reflector Vega95 width 25mm, bent 50° degree for SPL FL, RSLW20 FL, SLW20 FL series LED profile, length 2985mm	2,98m	reflector Vega 95	reflector	light reflector (need 2x), increase the profile efficiency by 20%
	90LC-RPL35US-HOR	90° degree horizontal module for RPL35US	set			incl. linear connector (4), horizontal connector(2)
	90LC-RPL35US-VER	90° degree vertical module for RPL35US	set			incl. linear connector (4), vertical connector(2)
	LC-LIN	Linear connector	pcs	galvanized steel	silver	-
	90LC-HOR	90° degree horizontal connector	pcs	galvanized steel	silver	-
	90LC-VER	90° degree vertical connector	pcs	galvanized steel	silver	-
	CUT-1	Quality 45/90/125 degree cut service	pcs	cut	profil/diffuser	extra service (option)
	MIL-1	Quality milling service	pcs	mill	profil	extra service (option)
	DRIL-1	Quality drilling service	pcs	dril	profil	extra service (option)
 <p>REGULAR DIFFUSER</p>	AB-PL-K2	Diffuser for PL, PLA, RPL, RPLA, RPL35 FL, PL35S, PL35D, SPL, SPL FL, DPL35 FL, RPL35US series profiles,	2m	polycarbonate UV-st.	clear/prismatic	diffuser, certfyied UV stabilized material
	AB-PL-M2	Diffuser for PL, PLA, RPL, RPLA, RPL35 FL, PL35S, PL35D, SPL, SPL FL, DPL35 FL, RPL35US series profiles,	2m	polycarbonate UV-st.	frosted/opal	diffuser, certfyied UV stabilized material
	AB-PL-K3	Diffuser for PL, PLA, RPL, RPLA, RPL35 FL, PL35S, PL35D, SPL, SPL FL, DPL35 FL, RPL35US series profiles,	3m	polycarbonate UV-st.	clear/prismatic	diffuser, certfyied UV stabilized material
	AB-PL-M3	Diffuser for PL, PLA, RPL, RPLA, RPL35 FL, PL35S, PL35D, SPL, SPL FL, DPL35 FL, RPL35US series profiles,	3m	polycarbonate UV-st.	frosted/opal	diffuser, certfyied UV stabilized material
	AB-PL-K6.1	Diffuser for PL, PLA, RPL, RPLA, RPL35 FL, PL35S, PL35D, SPL, SPL FL, DPL35 FL, RPL35US series profiles,	6,1m	polycarbonate UV-st.	clear/prismatic	diffuser, certfyied UV stabilized material
	AB-PL-M6.1	Diffuser for PL, PLA, RPL, RPLA, RPL35 FL, PL35S, PL35D, SPL, SPL FL, DPL35 FL, RPL35US series profiles,	6,1m	polycarbonate UV-st.	frosted/opal	diffuser, certfyied UV stabilized material
	AB-PL-B6.1	new , Diffuser for PL, PLA, RPL, RPLA, RPL35 FL, PL35S, PL35D, SPL, SPL FL, DPL35 FL, RPL35US series profiles,	6,1m	polycarbonate UV-st.	black/opal	diffuser, certfyied UV stabilized material
 <p>new, PRISMATIC "DIAMOND HONEY COMB EFFECT" DIFFUSER</p>	AB-PRI-K2	new , Prismatic "diamond honey comb effect" antiglare diffuser, for PL, PLA, RPL, RPLA, RPL35FL PL35S, PL35D, SPL, SPL FL, DPL35 FL, RPL35US series profiles	2m	polycarbonate UV-st.	prismatic/clear	high light transmission, prismatic pattern, antiglare
	AB-PRI-M2	new , Prismatic "diamond honey comb effect" antiglare diffuser, for PL, PLA, RPL, RPLA, RPL35FL PL35S, PL35D, SPL, SPL FL, DPL35 FL, RPL35US series profiles	2m	polycarbonate UV-st.	prismatic/opal	high light transmission, prismatic pattern, antiglare
	AB-PRI-K3	new , Prismatic "diamond honey comb effect" antiglare diffuser, for PL, PLA, RPL, RPLA, RPL35FL PL35S, PL35D, SPL, SPL FL, DPL35 FL, RPL35US series profiles	3m	polycarbonate UV-st.	prismatic/clear	high light transmission, prismatic pattern, antiglare
	AB-PRI-M3	new , Prismatic "diamond honey comb effect" antiglare diffuser, for PL, PLA, RPL, RPLA, RPL35FL PL35S, PL35D, SPL, SPL FL, DPL35 FL, RPL35US series profiles	3m	polycarbonate UV-st.	prismatic/opal	high light transmission, prismatic pattern, antiglare
	AB-PRI-M6.1	new , Prismatic "diamond honey comb effect" antiglare diffuser, for PL, PLA, RPL, RPLA, RPL35FL PL35S, PL35D, SPL, SPL FL, DPL35 FL, RPL35US series profiles	6,1m	polycarbonate UV-st.	prismatic/opal	high light transmission, prismatic pattern, antiglare
	AB-PRI-K6.1	new , Prismatic "diamond honey comb effect" antiglare diffuser, for PL, PLA, RPL, RPLA, RPL35FL PL35S, PL35D, SPL, SPL FL, DPL35 FL, RPL35US series profiles	6,1m	polycarbonate UV-st.	prismatic/clear	high light transmission, prismatic pattern, antiglare
 <p>new, MICRO PRISMATIC FILM UGR<19 & RELATED DIFFUSER</p>	AB -PL35F-K2	Diffuser for PL, PLA, RPL, RPLA, RPL35 FL, PL35S, PL35D, SPL, SPL FL, DPL35 FL, RPL35US series profiles with pocket for UGR<19 film micro prismatic film	2m	polycarbonate UV-st.	clear/w hold.slots	diffuser, certfyied UV stabilized material without micro prismatic film
	AB -PL35F-M2	Diffuser for PL, PLA, RPL, RPLA, RPL35 FL, PL35S, PL35D, SPL, SPL FL, DPL35 FL, RPL35US series profiles with pocket for UGR<19 film micro prismatic film	2m	polycarbonate UV-st.	opal/w hold.slots	diffuser, certfyied UV stabilized material without micro prismatic film
	AB -PL35F-K3	Diffuser for PL, PLA, RPL, RPLA, RPL35 FL, PL35S, PL35D, SPL, SPL FL, DPL35 FL, RPL35US series profiles with pocket for UGR<19 film micro prismatic film	3m	polycarbonate UV-st.	clear/w hold.slots	diffuser, certfyied UV stabilized material without micro prismatic film
	AB -PL35F-M3	Diffuser for PL, PLA, RPL, RPLA, RPL35 FL, PL35S, PL35D, SPL, SPL FL, DPL35 FL, RPL35US series profiles with pocket for UGR<19 film micro prismatic film	3m	polycarbonate UV-st.	opal/w hold.slots	diffuser, certfyied UV stabilized material without micro prismatic film
	AB -PL35F-K6.1	Diffuser for PL, PLA, RPL, RPLA, RPL35 FL, PL35S, PL35D, SPL, SPL FL, DPL35 FL, RPL35US series profiles with pocket for UGR<19 film micro prismatic film	6,1m	polycarbonate UV-st.	clear/w hold.slots	diffuser, certfyied UV stabilized material without micro prismatic film
	AB -PL35F-M6.1	Diffuser for PL, PLA, RPL, RPLA, RPL35 FL, PL35S, PL35D, SPL, SPL FL, DPL35 FL, RPL35US series profiles with pocket for UGR<19 film micro prismatic film	6,1m	polycarbonate UV-st.	opal/w hold.slots	diffuser, certfyied UV stabilized material without micro prismatic film
	AB-FILM35-PRI-2	new , Micro prismatic film 35mm for sliding into the diffuser, suitable for PL, PLA, RPL, RPLA, RPL35FL PL35S, PL35D, SPL, SPL FL, DPL35 FL, RPL35US series profiles, UGR<19	2m	UGR<19	micro prismatic film	Micro prismatic film reducing glare, UGR<19
	AB-FILM35-PRI-3	new , Micro prismatic film 35mm for sliding into the diffuser, suitable for PL, PLA, RPL, RPLA, RPL35FL PL35S, PL35D, SPL, SPL FL, DPL35 FL, RPL35US series profiles, UGR<19	3m	UGR<19	micro prismatic film	Micro prismatic film reducing glare, UGR<19
	AB-FILM35-PRI-6.1	new , Micro prismatic film 35mm for sliding into the diffuser, suitable for PL, PLA, RPL, RPLA, RPL35FL PL35S, PL35D, SPL, SPL FL, DPL35 FL, RPL35US series profiles, UGR<19	6,1m	UGR<19	micro prismatic film	Micro prismatic film reducing glare, UGR<19



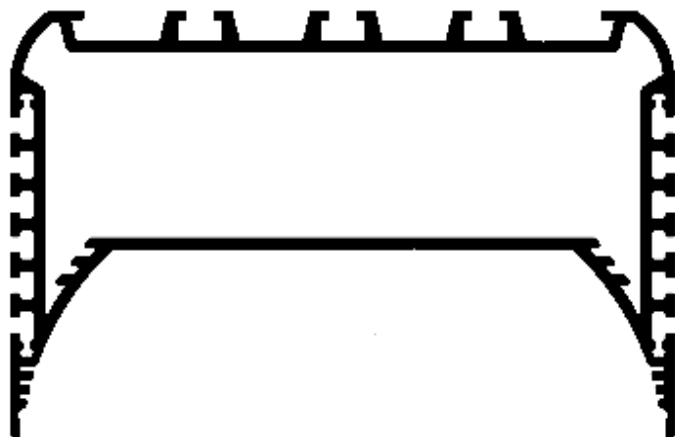



Item	Product code	Description	Dimmension	Material	Color	diffuser/lens type
 <p>PREMIUM LINE PROFILES PL55 FL 55x41mm, with 95% efficiency light reflector, efficiency is +20% ↑with the sides reflectors</p>	AL-PL55 FL-2	new , Surface, trimless, pendant, PL55 FL aluminum LED profile with Vega95 light reflector , increase efficiency +20%	2m	anodized aluminum	silver	no diffuser (1x), no reflector (2x) needs to be chosen from below list
	AL-PL55 FL-3	new , Surface, trimless, pendant, PL55 FL aluminum LED profile with Vega95 light reflector , increase efficiency +20%	3m	anodized aluminum	silver	no diffuser (1x), no reflector (2x) needs to be chosen from below list
	AL-PL55 FL-6.1	new , Surface, trimless, pendant, PL55 FL aluminum LED profile with Vega95 light reflector , increase efficiency +20%	6,1m	anodized aluminum	silver	no diffuser (1x), no reflector (2x) needs to be chosen from below list
	AL-MASS5-3	Blank aluminum diffuser for hiding the power supplier good for PL55, DPL55, DPL55 FL led profiles	3m	anodized aluminum	silver	Blank aluminum diffuser
	AL-MASS5-6.1	Blank aluminum diffuser for hiding the power supplier good for PL55, DPL55, DPL55 FL led profiles	6,1m	anodized aluminum	silver	Blank aluminum diffuser
	AL-REF-32-2	Light reflector Vega95 width 32mm for RPLW80 FL, DPL55 FL, PL55 FL, DPL70 FL, PLW70 FL length 1985mm	1,98	reflector Vega 95	reflector	light reflector (need 2x), increase the profile efficiency by 20%
	AL-REF-32-3	Light reflector Vega95 width 32mm for RPLW80 FL, DPL55 FL, PL55 FL, DPL70 FL, PLW70 FL length 2985mm	2,98	reflector Vega 95	reflector	light reflector (need 2x), increase the profile efficiency by 20%
	EC-PL55 FL	new , Aluminum end cap for profile PL55 FL without cable hole	pcs	anodized aluminum	silver	-
	LC-LIN	Linear connector	pcs	galvanized steel	silver	-
	90LC-HOR	90° degree horizontal connector	pcs	galvanized steel	silver	-
	90LC-VER	90° degree vertical connector	pcs	galvanized steel	silver	-
	120LC-VER	120° degree vertical connector	pcs	galvanized steel	silver	-
	MC-PL55	Gypsum ceiling Trimless installation mounting bracket for PL55 FL led profile	pcs	galvanized steel	silver	gypsum ceiling trimless installation accessories
	MC-PL55-MAG	Gypsum ceiling Trimless installation magnetic mounting bracket (set) for PL55 led profile	set	galvanized steel	silver	incl. magnetic pads (2), mounting bracket(1), security cable(1)
	MC-LOCK	Security steel cable with lock for trimless installed mounting brackets	pcs	steel cable	silver	security cable (1) attached to the bracket
	MC- KEY-PL55FL	new , Positioning key for trimless base installation for PL55FL led profile	pcs	galvanized steel	silver	tool to positioning the installation base, need at list 2 per m
	MC-CAB-1,6	Steel suspension cable 2m long with anchor, set of two	set	aluminum/steel	silver	set of two
	COLOUR-CAB-1,6	Coolored textil cable 2x075mm2, length 1,6m	pcs	cable	colour	=
	30-DURIS-WW	Double row constant voltage Rigid FR-4 with Osram Duris E5 LEDs, 24V, CC driver on board, 11,6W, 3pcs/m	1pcs	Osram Duris E5	2700°K	POWERED BY OSRAM LED CHIPS
	30-DURIS-NW	Double row constant voltage Rigid FR-4 with Osram Duris E5 LEDs, 24V, CC driver on board, 11,6W, 3pcs/m	1pcs	Osram Duris E5	4000°K	
	30-DURIS-CW	Double row constant voltage Rigid FR-4 with Osram Duris E5 LEDs, 24V, CC driver on board, 11,6W, 3pcs/m	1pcs	Osram Duris E5	5000°K	
	CUT-1	Quality 45/90/125 degree cut service	pcs	cut	profil/diffuser	extra service (option)
	MIL-1	Quality milling service	pcs	mill	profil	extra service (option)
	DRIL-1	Quality drilling service	pcs	dril	profil	extra service (option)
 <p>PREMIUM LINE PROFILES DPL55 FL 55x67mm, with 95% efficiency light reflector, efficiency is +20% ↑with the sides reflectors</p>	AL-DPL55 FL-2	Surface, trimless, pendant, double side light output, DPL55 FL aluminum LED profile with Vega95 light reflector , +20% more light	2m	anodized aluminum	silver	no diffuser (2x), no reflector (2x) needs to be chosen from below list,
	AL-DPL55 FL-3	Surface, trimless, pendant, double side light output, DPL55 FL aluminum LED profile with Vega95 light reflector , +20% more light	3m	anodized aluminum	silver	no diffuser (2x), no reflector (2x) needs to be chosen from below list,
	AL-DPL55 FL-6.1	Surface, trimless, pendant, double side light output, DPL55 FL aluminum LED profile with Vega95 light reflector , +20% more light	6,1m	aluminum	silver	no diffuser (2x), no reflector (2x) needs to be chosen from below list,
	AL-MASS5-3	Blank aluminum diffuser for hiding the power supplier good for PL55, DPL55, DPL55 FL led profiles	3m	anodized aluminum	silver	Blank aluminum diffuser
	AL-MASS5-6.1	Blank aluminum diffuser for hiding the power supplier good for PL55, DPL55, DPL55 FL led profiles	6,1m	anodized aluminum	silver	Blank aluminum diffuser
	AL-REF-32-2	Light reflector Vega95 width 32mm for RPLW80 FL, DPL55 FL, PL55 FL, DPL70 FL, PLW70 FL length 1985mm	1,98	reflector Vega 95	reflector	light reflector (need 2x), increase the profile efficiency by 20%
	AL-REF-32-3	Light reflector Vega95 width 32mm for RPLW80 FL, DPL55 FL, PL55 FL, DPL70 FL, PLW70 FL length 2985mm	2,98	reflector Vega 95	reflector	light reflector (need 2x), increase the profile efficiency by 20%
	EC-DPL55 FL	new , Aluminum end caps for DPL55 FL LED profile	pcs	anodized aluminum	silver	-
	MC-DPL55	Surface/pendant mounting bracket for DPL55 FL, DPL70 FL LED profile	pcs	galvanized steel	silver	-
	LC-LIN	Linear connector	pcs	galvanized steel	silver	-
	90LC-HOR	90° degree horizontal connector	pcs	galvanized steel	silver	-
	90LC-VER	90° degree vertical connector	pcs	galvanized steel	silver	-
	120LC-VER	120° degree vertical connector	pcs	galvanized steel	silver	-
	MC-LOCK-2 SET	Security steel cable for maintain and surface installation mounting brackets , set of two	set	steel cable	silver	security cable need to be attached to the bracket and profile
	MC-CAB-1,6	Steel suspension cable 1,6m long with anchor, set of two	set	aluminum/steel	silver	set of two
	36-DURIS-WW	Double row constant voltage Rigid FR-4 with Osram Duris E5 LEDs, 24V, CC driver on board, 11,6W, 3pcs/m	1pcs	Osram Duris E5	2700°K	POWERED BY OSRAM LED CHIPS
	36-DURIS-NW	Double row constant voltage Rigid FR-4 with Osram Duris E5 LEDs, 24V, CC driver on board, 11,6W, 3pcs/m	1pcs	Osram Duris E5	4000°K	
	36-DURIS-CW	Double row constant voltage Rigid FR-4 with Osram Duris E5 LEDs, 24V, CC driver on board, 11,6W, 3pcs/m	1pcs	Osram Duris E5	5000°K	
	CUT-1	Quality 45/90/125 degree cut service	pcs	cut	profil/diffuser	extra service (option)
	MIL-1	Quality milling service	pcs	mill	profil	extra service (option)
	DRIL-1	Quality drilling service	pcs	dril	profil	extra service (option)





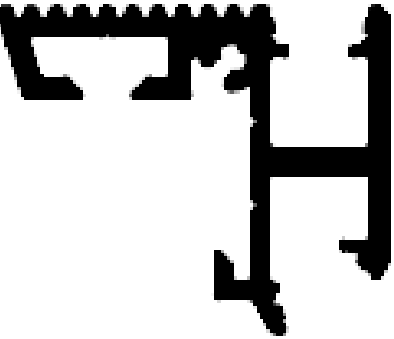



Item	Product code	Description	Dimmension	Material	Color	diffuser/lens type
						
	AL-RPL55-2	Recessed PowerLine 55mm, anodized in silver LED profile, suitable for insert led profile with the reflector	2m	anodized aluminum	silver	Base profile RPL55, housing for insert profile, power supply
	AL-RPL55-3	Recessed PowerLine 55mm, anodized in silver LED profile, suitable for insert led profile with the reflector	3m	anodized aluminum	silver	Base profile RPL55, housing for insert profile, power supply
	AL-RPL55-6.1	Recessed PowerLine 55mm, anodized in silver LED profile, suitable for insert led profile with the reflector	6,1m	anodized aluminum	silver	Base profile RPL55, housing for insert profile, power supply
	AL-MAS55-3	Blank aluminum diffuser for hiding the power supplier good for PL55, DPL55, DPL55 FL led profiles	3m	anodized aluminum	silver	Blank aluminum diffuser
	AL-MAS55-6.1	Blank aluminum diffuser for hiding the power supplier good for PL55, DPL55, DPL55 FL led profiles	6,1m	anodized aluminum	silver	Blank aluminum diffuser
	AL-RPL55-INS-2	Insert profile with light reflector Vega95 25mm, increase the brightness/efficiency +20% for RPL55	2m	anodized aluminum	silver	insert profile for led instalation, suitable for RPL55, no reflectors (2x)
	AL-RPL55-INS-3	Insert profile with light reflector Vega95 25mm, increase the brightness/efficiency +20% for RPL55	3m	anodized aluminum	silver	insert profile for led instalation, suitable for RPL55, no reflectors (2x)
	AL-RPL55-INS-6.1	Insert profile with light reflector Vega95 25mm, increase the brightness/efficiency +20% for RPL55	6,1m	anodized aluminum	silver	insert profile for led instalation, suitable for RPL55, no reflectors (2x)
	AL-REF25-2	Light reflector Vega95 width 25mm for insert RPL55 LED profile, length 1985mm	1,98m	reflector Vega 95	reflector	light reflector (need 2x), increase the profile efficiency by 20%
	AL-REF25-3	Light reflector Vega95 width 25mm for insert RPL55 LED profile, length 2985mm	2,98m	reflector Vega 95	reflector	light reflector (need 2x), increase the profile efficiency by 20%
	LC-LIN	Linear connector	pcs	galvanized steel	silver	-
	90LC-HOR	90° degree horizontal connector	pcs	galvanized steel	silver	-
	90LC-VER	90° degree vertical connector	pcs	galvanized steel	silver	-
	MC-SPR-B	new, Spring beacket for RPL55 led profile, 2pcs set	2 pcs set	stainless steel	silver	-
	AL-MAS55-3	new, Blank aluminum diffuser for hiding the power supplier good for PL55, DPL55 led profiles	3m	anodized aluminum	silver	-
	MC-LOCK-2 SET	Security steel cable for maintain and surface installation mounting brackets , set of two	set	steel cable	silver	security cable need to be attached to the insert profile and the base
	MC- KEY-RPL55	new, removing insert profile key for RPL55 led profile	pcs	galvanized steel	silver	tool for removing the insert profile from the base (RPL55)
	EC-RPL55	new, Aluminum end cap for profile PL55 without cable hole	pcs	aluminum	silver	-
	36-DURIS-WW	Double row constant voltage Rigid FR-4 with Osram Duris E5 LEDs, 24V, CC driver on board, 11,6W, 3pcs/m	1pcs	Osram Duris E5	2700°K	POWERED BY  LED CHIPS
	36-DURIS-NW	Double row constant voltage Rigid FR-4 with Osram Duris E5 LEDs, 24V, CC driver on board, 11,6W, 3pcs/m	1pcs	Osram Duris E5	4000°K	
	36-DURIS-CW	Double row constant voltage Rigid FR-4 with Osram Duris E5 LEDs, 24V, CC driver on board, 11,6W, 3pcs/m	1pcs	Osram Duris E5	5000°K	
	CUT-1	Quality 45/90/125 degree cut service	pcs	cut	profil/diffuser	extra service (option)
	MIL-1	Quality milling service	pcs	mill	profil	extra service (option)
	DRIL-1	Quality drilling service	pcs	dril	profil	extra service (option)
Premium line profiles, RPL55 70x75mm with insert LED profile, Led profile accomodate standard 21X31mm power supply						
						
	AL-RPL55US-2	new, Plaster board profile, RPL55FL US for TRIMLESS INSTALLATION, recess, RAW aluminum, suitable with the light reflector Vega95 (increases light output+20%)	2m	RAW aluminum	silver	no diffuser, need to be chosen from below list,
	AL-RPL55US-3	new, Plaster board profile, RPL55FL US for TRIMLESS INSTALLATION, recess, RAW aluminum, suitable with the light reflector Vega95 (increases light output+20%)	3m	RAW aluminum	silver	no diffuser, need to be chosen from below list,
	AL-RPL55US-6.1	new, Plaster board profile, RPL55FL US for TRIMLESS INSTALLATION, recess, RAW aluminum, suitable with the light reflector Vega95 (increases light output+20%)	6,1m	RAW aluminum	silver	no diffuser, need to be chosen from below list,
	EC-RPL55US-H3	End cap for plaster board profile RPL55US, without cable hole	pcs	RAW aluminum	silver	-
	AL-REF-32-2	Light reflector Vega95 width 32mm for RPLW80 FL, DPL55 FL, PL55 FL, DPL70 FL, PLW70 FL length 1985mm	1,98	reflector Vega 95	reflector	light reflector (need 2x), increase the profile efficiency by 20%
	AL-REF-32-3	Light reflector Vega95 width 32mm for RPLW80 FL, DPL55 FL, PL55 FL, DPL70 FL, PLW70 FL length 2985mm	2,98	reflector Vega 95	reflector	light reflector (need 2x), increase the profile efficiency by 20%
	90LC-RPL55US-HOR	90° degree horizontal module for RPL55US	set			incl. linear connector (4), horizontal connector(2)
	90LC-RPL55US-VER	90° degree vertical module for RPL55US	set			incl. linear connector (4), vertical connector(2)
	LC-LIN	Linear connector	pcs	galvanized steel	silver	-
	90LC-HOR	90° degree horizontal connector	pcs	galvanized steel	silver	-
	90LC-VER	90° degree vertical connector	pcs	galvanized steel	silver	-
						
	AB-PL55-K2	Diffuser for PL55, satin opal finish for PL55, DPL55, RPL55, RPL55US	2m	polycarbonate UV-st.	clear	diffuser, certyfied UV stabilized material
	AB-PL55-M2	Diffuser for PL55, satin opal finish for PL55, DPL55, RPL55, RPL55US	2m	polycarbonate UV-st.	frosted/opal	diffuser, certyfied UV stabilized material
Regular diffuser	AB-PL55-K3	Diffuser for PL55, satin opal finish for PL55, DPL55, RPL55, RPL55US	3m	polycarbonate UV-st.	clear	diffuser, certyfied UV stabilized material
	AB-PL55-M3	Diffuser for PL55, satin opal finish for PL55, DPL55, RPL55, RPL55US	3m	polycarbonate UV-st.	frosted/opal	diffuser, certyfied UV stabilized material
	AB-PL55-K6.1	Diffuser for PL55, satin opal finish for PL55, DPL55, RPL55, RPL55US	6,1m	polycarbonate UV-st.	clear	diffuser, certyfied UV stabilized material
	AB-PL55-M6.1	Diffuser for PL55, satin opal finish for PL55, DPL55, RPL55, RPL55US	6,1m	polycarbonate UV-st.	frosted/opal	diffuser, certyfied UV stabilized material
						
	AB-PR155-K2	new, Prismatic "honey comb effect", antiglare diffuser for PL55, DPL55, RPL55, RPL55US led profiles, UGR<19	2m	polycarbonate UV-st.	prismatic/clear	high light transmission, prismatic pattern, antiglare
	AB-PR155-M2	new, Prismatic "honey comb effect", antiglare diffuser for PL55, DPL55, RPL55, RPL55US led profiles, UGR<19	2m	polycarbonate UV-st.	prismatic/opal	high light transmission, prismatic pattern, antiglare
	AB-PR155-K3	new, Prismatic "honey comb effect", antiglare diffuser for PL55, DPL55, RPL55, RPL55US led profiles, UGR<19	3m	polycarbonate UV-st.	prismatic/clear	high light transmission, prismatic pattern, antiglare
	AB-PR155-M3	new, Prismatic "honey comb effect", antiglare diffuser for PL55, DPL55, RPL55, RPL55US led profiles, UGR<19	3m	polycarbonate UV-st.	prismatic/opal	high light transmission, prismatic pattern, antiglare
	AB-PR155-K6.1	new, Prismatic "honey comb effect", antiglare diffuser for PL55, DPL55, RPL55, RPL55US led profiles, UGR<19	6,1m	polycarbonate UV-st.	prismatic/clear	high light transmission, prismatic pattern, antiglare
Prismatic "diamond honey comb effect" UGR<19	AB-PR155-M6.1	new, Prismatic "honey comb effect", antiglare diffuser for PL55, DPL55, RPL55, RPL55US led profiles, UGR<19	6,1m	polycarbonate UV-st.	prismatic/opal	high light transmission, prismatic pattern, antiglare
						
	AB-PL55-K2	Diffuser for PL55, satin opal finish for PL55, DPL55, RPL55, RPL55US	2m	polycarbonate UV-st.	clear	diffuser, certyfied UV stabilized material
	AB-PL55-M2	Diffuser for PL55, satin opal finish for PL55, DPL55, RPL55, RPL55US	2m	polycarbonate UV-st.	frosted/opal	diffuser, certyfied UV stabilized material
	AB-PL55-K3	Diffuser for PL55, satin opal finish for PL55, DPL55, RPL55, RPL55US	3m	polycarbonate UV-st.	clear	diffuser, certyfied UV stabilized material
	AB-PL55-M3	Diffuser for PL55, satin opal finish for PL55, DPL55, RPL55, RPL55US	3m	polycarbonate UV-st.	frosted/opal	diffuser, certyfied UV stabilized material
	AB-PL55-K6.1	Diffuser for PL55, satin opal finish for PL55, DPL55, RPL55, RPL55US	6,1m	polycarbonate UV-st.	clear	diffuser, certyfied UV stabilized material
	AB-PL55-M6.1	Diffuser for PL55, satin opal finish for PL55, DPL55, RPL55, RPL55US	6,1m	polycarbonate UV-st.	frosted/opal	diffuser, certyfied UV stabilized material
Micro prismatic film UGR<19 and related diffuser						
	AB-FILM55-PR1-2	new, Micro prismatic film 55mm for sliding into the diffuser, suitable for PL55, DPL55, RPL55, RPL55US series led profiles, UGR<19	2m	UGR<19	micro prismatic film	Micro prismatic film reducing glare, no hosting diffuser UGR<19
	AB-FILM55-PR1-3	new, Micro prismatic film 55mm for sliding into the diffuser, suitable for PL55, DPL55, RPL55, RPL55US series led profiles, UGR<19	3m	UGR<19	micro prismatic film	Micro prismatic film reducing glare, no hosting diffuser UGR<19
	AB-FILM55-PR1-6.1	new, Micro prismatic film 55mm for sliding into the diffuser, suitable for PL55, DPL55, RPL55, RPL55US series led profiles, UGR<19	6,1m	UGR<19	micro prismatic film	Micro prismatic film reducing glare, no hosting diffuser UGR<19


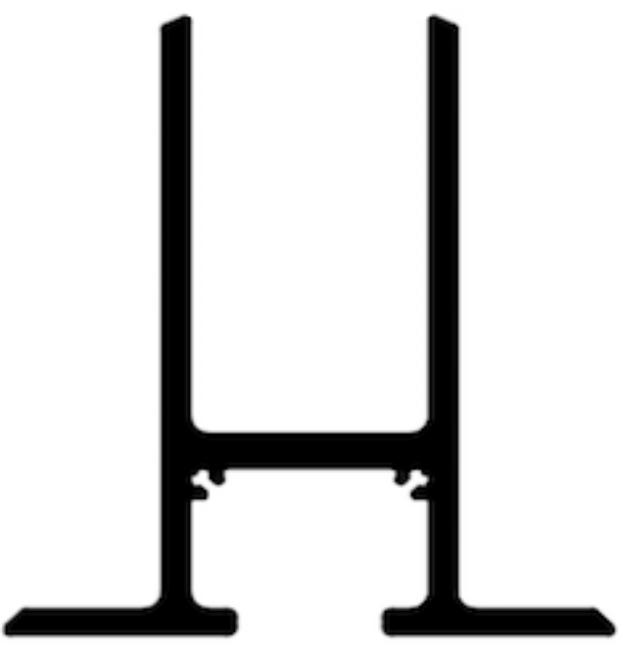


Item	Product code	Description	Dimmension	Material	Color	diffuser/lens type
						
	AB-PL70-M2	new, Polycarbonate, UV-stabilized, diffuser for DPL70, RPL70 US, PLW70 US opal finish	2m	polycarbonate UV-st.	frosted/opal	diffuser, certiyed UV stabilized material
	AB-PL70-M3	new, Polycarbonate, UV-stabilized, diffuser for DPL70, RPL70 US, PLW70 US opal finish	3m	polycarbonate UV-st.	frosted/opal	diffuser, certiyed UV stabilized material
	AB-PL70-M6.1	new, Polycarbonate, UV-stabilized, diffuser for DPL70, RPL70 US, PLW70 US opal finish	6,1m	polycarbonate UV-st.	frosted/opal	diffuser, certiyed UV stabilized material
	AB-PR170-K2	new, Prismatic "honey comb effect", antiglare diffuser for DPL70, RPL70US, PLW70US led profiles, UGR<19	2m	polycarbonate UV-st.	prismatic/clear	high light transmission, prismatic pattern, antiglare
	AB-PR170-K3	new, Prismatic "honey comb effect", antiglare diffuser for DPL70, RPL70US, PLW70US led profiles, UGR<19	3m	polycarbonate UV-st.	prismatic/clear	high light transmission, prismatic pattern, antiglare
	AB-PR170-K6.1	new, Prismatic "honey comb effect", antiglare diffuser for DPL70, RPL70US, PLW70US led profiles, UGR<19	6,1m	polycarbonate UV-st.	prismatic/clear	high light transmission, prismatic pattern, antiglare
	AB-PR170-M6.1	new, Prismatic "honey comb effect", antiglare diffuser for DPL70, RPL70US, PLW70US led profiles, UGR<19	6,1m	polycarbonate UV-st.	prismatic/opal	high light transmission, prismatic pattern, antiglare
Diffuser DPL70						
						
	AL-RPL45US-2	new, Plaster board profile, RPL45FL US for ceiling/wall trimless installation, recess, BLACK color anodizing BASE for other lighting profile inserts	2m	anodized aluminum	black	no diffuser, no insert, need to be chosen from below list,
	AL-RPL45US-3	new, Plaster board profile, RPL45FL US for ceiling/wall trimless installation, recess, BLACK color anodizing BASE for other lighting profile inserts	3m	anodized aluminum	black	no diffuser, no insert, need to be chosen from below list,
	AL-RPL45US-6.1	new, Plaster board profile, RPL45FL US for ceiling/wall trimless installation, recess, BLACK color anodizing BASE for other lighting profile inserts	6,1m	anodized aluminum	black	no diffuser, no insert, need to be chosen from below list,
	EC-RPL45US-H3	End cap for plaster board profile RPL45US, without cable hole	pcs	anodized aluminum	black	-
	LC-LIN	Linear connector	pcs	galvanized steel	black	-
	90LC-HOR	90° degree horizontal connector	pcs	galvanized steel	black	-
	90LC-VER	90° degree vertical connector	pcs	galvanized steel	black	-
	CUT-1	Quality 45/90/125 degree cut service	pcs	cut	profil/diffuser	extra service (option)
	MIL-1	Quality milling service	pcs	mill	profil	extra service (option)
	DRIL-1	Quality drilling service	pcs	dril	profil	extra service (option)
NEW, RPL45 US Plaster Board profile, 46x79mm						
 						
	AL-INS-FLO-2	new, INSERT LIGHT profile compatyble wth Fiorentina LEDIL optic lens dedicated for our plaster board profile, RPL45FL US , anodized in BLACK color	2m	anodized aluminum	black	no diffuser, no insert, need to be chosen from below list,
	AL-INS-FLO-3	new, INSERT LIGHT profile compatyble wth Fiorentina LEDIL optic lens dedicated for our plaster board profile, RPL45FL US , anodized in BLACK color	3m	anodized aluminum	black	no diffuser, no insert, need to be chosen from below list,
	AL-INS-FLO-6.1	new, INSERT LIGHT profile compatyble wth Fiorentina LEDIL optic lens dedicated for our plaster board profile, RPL45FL US , anodized in BLACK color	6,1m	anodized aluminum	black	no diffuser, no insert, need to be chosen from below list,
	EC-INS-FLO-H3	End cap for INSERT profile RPL45US-INS, without cable hole, anodized in black	pcs	anodized aluminum	black	-
	LC-LIN	Linear connector	pcs	galvanized steel	black	-
	90LC-HOR	90° degree horizontal connector	pcs	galvanized steel	black	-
	90LC-VER	90° degree vertical connector	pcs	galvanized steel	black	-
	CUT-1	Quality 45/90/125 degree cut service	pcs	cut	profil/diffuser	extra service (option)
	MIL-1	Quality milling service	pcs	mill	profil	extra service (option)
	DRIL-1	Quality drilling service	pcs	dril	profil	extra service (option)
	24x285-CREE	24-XPE2-2700 (12x XPE2, 2700K, CRI80, Q5 107lm/350mA), 24mm x 285mm, aluminum base PCB, black solder mask	pcs	aluminum	black	24mmx285mm single PCB
	FP16391	FP16391-Florentina-HLD-BW, 285.6mmx19.5mm high 10.2mm 60° batwing beam	pcs	LEDIL lens	black	285.5mmx19.5mmx10.2mm
	CP15341	CP15341-Florentina-HLD-BW, 286.8mmx19.4mm high 9.7mm oval beam for wall wasing	pcs	LEDIL lens	black	285.5mmx19.5mmx10.2mm
	FP14997	FP14997-Florentina-HLD-BW, 285.6mmx19.5mm high 9.48mm, 40° wide beam	pcs	LEDIL lens	black	285.5mmx19.5mmx10.2mm
	CP14995	CP14995-Florentina-HLD-BW, 285.6mmx19.5mm high 9.7mm 35°+12° oval beam	pcs	LEDIL lens	black	285.5mmx19.5mmx10.2mm
	CP14993	CP14993-Florentina-HLD-BW, 285.6mmx19.5mm high 9.7mm 36° smooth spot beam	pcs	LEDIL lens	black	285.5mmx19.5mmx10.2mm
	CP14994	CP14994-Florentina-HLD-BW, 285.6mmx19.5mm high 9.7mm 30° medium beam	pcs	LEDIL lens	black	285.5mmx19.5mmx10.2mm
	CP14996	CP14996-Florentina-HLD-BW, 285.6mmx19.5mm high 9.7mm 18° diffused spot beam	pcs	LEDIL lens	black	285.5mmx19.5mmx10.2mm
	CP14866	CP14866-Florentina-HLD-BW, 285.6mmx19.5mm high 9.7mm 10° real spot beam	pcs	LEDIL lens	black	285.5mmx19.5mmx10.2mm
NEW, INS-FLO, insert profile for RPL45 US profile in black color						

Item	Product code	Description	Dimmension	Material	Color	diffuser/lens type
						
	AL-INS-SS20B-2 AL-INS-SS20B-3 AL-INS-SS20B-6.1 EC-INS-SS20B-H3	new , SS20B insert light profile for our plaster board profile, RPL45FL US , anodized in black color new , SS20B insert light profile for our plaster board profile, RPL45FL US , anodized in black color new , SS20B insert light profile for our plaster board profile, RPL45FL US , anodized in black color End cap for INSERT SS20B profile, without cable hole, anodized in black	2m 3m 6,1m pcs	anodized aluminum anodized aluminum anodized aluminum anodized aluminum	black black black black	no diffuser, no insert, need to be chosen from below list, no diffuser, no insert, need to be chosen from below list, no diffuser, no insert, need to be chosen from below list, -
	LC-LIN 90LC-HOR 90LC-VER	Linear connector 90° degree horizontal connector 90° degree vertical connector	pcs pcs pcs	galvanized steel galvanized steel galvanized steel	black black black	- - -
	AB-SS20B-2 AB-SS20B-3 AB-SS20B-6.1	NEW , Black / Opal diffuser for ALU-SWISS 20 LED profile NEW , Black / Opal diffuser for ALU-SWISS 20 LED profile NEW , Black / Opal diffuser for ALU-SWISS 20 LED profile	2m 3m 6,1m	polycarbonate UV-st. polycarbonate UV-st. polycarbonate UV-st.	black/opal black/opal black/opal	black diffuser, opal when is on black diffuser, opal when is on black diffuser, opal when is on
	CUT-1 MIL-1 DRIL-1	Quality 45/90/125 degree cut service Quality milling service Quality drilling service	pcs pcs pcs	cut mill dril	profil/diffuser profil profil	extra service (option) extra service (option) extra service (option)
NEW , INS-SS20B, insert profile for RPL45 US profile in black color, without diffuser and mounting bracket						
 BASE TRIMLESS, 30x37mm						
	AL-BA-TLESS-2 AL-BA-TLESS-3 AL-BA-TLESS-6.1	new , Gypsum ceiling installation base profile for the trimless profile PL55, PL55FL, SPL, SPLFL, SS20, SPLW116 new , Gypsum ceiling installation base profile for the trimless profile PL55, PL55FL, SPL, SPLFL, SS20, SPLW116 new , Gypsum ceiling installation base profile for the trimless profile PL55, PL55FL, SPL, SPLFL for future customer custimize length cut	2m 3m 6,1m	raw aluminum raw aluminum raw aluminum	silver silver silver	not visible part, no diffuser, not visible part, no diffuser, not visible part, no diffuser
 WALL LED LAMP, 25,6x131mm						
	AL-WLL-2 EC-WLL-H1-L EC-WLL-H1-R	Wall instaled LED profile, two side light out, anodized in silver Aluminum end cap for Wall LED Lamp w/out cable hole, left Aluminum end cap for Wall LED Lamp w/out cable hole, right	2m pcs pcs	anodized aluminum aluminum aluminum	silver silver silver	no diffuser(2x), needs to be chosen from below list, - -
	AB-SL-K2 AB-SL-M2	Top diffuser for Wall LED Lamp, SL series Top diffuser for Wall LED Lamp, SL series	2m 2m	polycarbonate UV-st. polycarbonate UV-st.	clear/transparent frosted/opal	diffuser, certyfied UV stabilized material diffuser, certyfied UV stabilized material
	AB-SLW-K2 AB-SLW-M2	Bottom diffuser for Wall LED Lamp, SLW series Bottom diffuser for Wall LED Lamp, SLW series	2m 2m	polycarbonate UV-st. polycarbonate UV-st.	clear/transparent frosted/opal	diffuser, certyfied UV stabilized material diffuser, certyfied UV stabilized material
	AL-BA-2 EC-BA-H1 AL-BAS-2 EC-BAS	Aluminum hiding/mounting base for PLS35S LED profile Aluminum end cap for hiding/mounting base (BA) Aluminum mounting base (small) for wall installed SLW20B LED Lamp Aluminum end cap for (small) mounting base	2m pcs 2m pcs	anodized aluminum aluminum anodized aluminum aluminum	silver silver silver silver	- - - -
 BASEBOARD, 12,5x101,2mm						
	AL-BB-2 AL-BB-3 AL-BB-6.1 AL-RBB-3 RAL	Baseboard lighting profile, base for Alu-Swiss profile, anodized in silver Baseboard lighting profile, base for Alu-Swiss profile, anodized in silver Baseboard lighting profile, base for Alu-Swiss profile, anodized in silver Baseboard lighting profile, base for Alu-Swiss profile, powder coat in RAL9003 (white)	2m 3m 6,1m 3m	anodized aluminum anodized aluminum anodized aluminum aluminum	silver silver silver RAL9003	no diffuser, need to be chosen from below list, no diffuser, need to be chosen from below list, no diffuser, need to be chosen from below list, no diffuser, need to be chosen from below list,
	AL-SS-2 AL-SS-3	Lighting profile Alu-Swiss for 6-8mm LED stripe, anodized in silver Lighting profile Alu-Swiss for 6-8mm LED stripe, anodized in silver	2m 3m	anodized aluminum anodized aluminum	silver silver	no diffuser, need to be chosen from below list, no diffuser, need to be chosen from below list,
	AB-SS-K2 AB-SS-M2 AB-SS-K3 AB-SS-M3	+ Diffuser for Alu-Swiss profile, Diffuser for Alu-Swiss profile, Diffuser for Alu-Swiss profile, Diffuser for Alu-Swiss profile,	2m 2m 3m 3m	polycarbonate UV-st. polycarbonate UV-st. polycarbonate UV-st. polycarbonate UV-st.	clear/transparent frosted/opal clear/transparent frosted/opal	diffuser, certyfied UV stabilized material diffuser, certyfied UV stabilized material diffuser, certyfied UV stabilized material diffuser, certyfied UV stabilized material
	LC-LIN 90LC-HOR	Linear connector 90° degree horizontal connector	pcs pcs	galvanized steel galvanized steel	silver silver	- -

Item	Product code	Description	Dimmension	Material	Color	diffuser/lens type
 WALL US, 16x70mm	AL-WLA-2 AL-WLA-6.1	Alu-Wall US, anodized in silver aluminum LED profile Alu-Wall US, anodized in silver aluminum LED profile	2m 6,1m	anodized aluminum anodized aluminum	silver silver	no diffuser, need to be chosen from below list, no diffuser, need to be chosen from below list,
	EC-WLA-R EC-WLA-L	ABS end cap for ALU-Wall US, with cable hole, right ABS end cap for ALU-Wall US, with cable hole, left	pcs pcs	ABS ABS	grey grey	- -
	AB-WLA-K2 AB-WLA-M2 AB-WLA-M6.1	Diffuser for Alu-Wall US profile, Diffuser for Alu-Wall US profile, Diffuser for Alu-Wall US profile; 6,1m frosted	2m 2m 6,1m	polycarbonate UV-st. polycarbonate UV-st. polycarbonate UV-st.	clear/transparent frosted/opal frosted/opal	diffuser, certiyed UV stabilized material diffuser, certiyed UV stabilized material diffuser, certiyed UV stabilized material
 ALU GLASS, 26x60mm	AL-GLS-6.1 GA-TRA1	Hand rail profile for glass barriers & edge LED lighting, glass tickness 17,5mm, for future customer custimize length cut Isolation silicone gasket (transparent) for fitting the profile with glass	6,1m 1m	anodized aluminum anodized aluminum	silver silicone	no diffuser, please add isolation silicone gasket, obligatory transparent, light transmitting silicone gasket
	CUT-1 MIL-1 DRIL-1	Quality 45/90/125 degree cut service Quality milling service Quality driling service	pcs pcs pcs	cut mill dril	profil/diffuser profil profil	extra service (option) extra service (option) extra service (option)
 STAIR 2, 46x100mm	AL-ST2-2 AL-ST2-3 AL-ST2-6.1	Alu-Stair 2 profile, with light directed on the stair Alu-Stair 2 profile, with light directed on the stair	2m 3m 6.1m	anodized aluminum anodized aluminum anodized aluminum	silver silver silver	no diffuser, need to be chosen from below list, no diffuser, need to be chosen from below list, no diffuser, need to be chosen from below list,
	EC-ST2-H1-L EC-ST2-H1-R	Aluminum end cap for Alu-Stair 2, LED profile, Left Aluminum end cap for Alu-Stair 2, LED profile, Right	pcs pcs	aluminum aluminum	silver silver	- -
	AB-STR2-ACM2 AB-STR2-ACM3 AB-STR2-ACM6.1	Acrylic diffuser for STAIR2 series profiles, satin mat finish Acrylic diffuser for STAIR2 series profiles, satin mat finish Acrylic diffuser for STAIR2 series profiles, satin mat finish	2m 3m 6.1m	PMMA PMMA PMMA	satin matt satin matt satin matt	luminated top diffuser, (can be replaced by anti slip rubber) luminated top diffuser, (can be replaced by anti slip rubber) luminated top diffuser, (can be replaced by anti slip rubber)
	RU-STR2-1 AB-STR2-M2 AB-STR2-M3 AB-STR2-M6.1	Anti slip rubber, gery color for STAIR2 series profiles Vertical (front) diffuser for STAIR2 series profiles, frosted Vertical (front) diffuser for STAIR2 series profiles, frosted Vertical (front) diffuser for STAIR2 series profiles, frosted	1m 2m 3m 6,1	rubber polycarbonate UV-st. polycarbonate UV-st. polycarbonate UV-st.	grey frosted/opal frosted/opal frosted/opal	anti slip rubber Vertical (front) diffuser, obligatory Vertical (front) diffuser, obligatory Vertical (front) diffuser, obligatory
	CUT-1 MIL-1 DRIL-1	Quality 45/90/125 degree cut service Quality milling service Quality driling service	pcs pcs pcs	cut mill dril	profil/diffuser profil profil	extra service (option) extra service (option) extra service (option)
 STAIR 2 CARPET, 46x82,4mm	AL-ST2C-2 AL-ST2C-3	Alu-Stair 2 carpet profile, with light directed down on the stair Alu-Stair 2 carpet profile, with light directed down on the stair	2m 3m	anodized aluminum anodized aluminum	silver silver	no diffuser, need to be chosen from below list, no diffuser, need to be chosen from below list,
	EC-ST2C-H1-L EC-ST2C-H1-R AB-STR2-ACM2 AB-STR2-ACM3 RU-STR2-1 AB-STR2-M2 AB-STR2-M3	Aluminum end cap for Alu-Stair 2 carpet, LED profile, Left Aluminum end cap for Alu-Stair 2 carpet, LED profile, Right Acrylic diffuser for STAIR2 series profiles, satin mat finish Acrylic diffuser for STAIR2 series profiles, satin mat finish Anti slip rubber, gery color for STAIR2 series profiles Vertical (front) diffuser for STAIR2 series profiles, frosted Vertical (front) diffuser for STAIR2 series profiles, frosted	pcs pcs 2m 3m 1m 2m 3m	aluminum aluminum PMMA, UV-st. PMMA, UV-st. rubber polycarbonate UV st. polycarbonate UV st.	silver silver satin matt satin matt grey frosted/opal frosted/opal	- - luminated top diffuser , (can be replaced by anti slip rubber) luminated top diffuser , (can be replaced by anti slip rubber) anti slip rubber Vertical (front) diffuser, obligatory Vertical (front) diffuser, obligatory
	CUT-1 MIL-1 DRIL-1	Quality 45/90/125 degree cut service Quality milling service Quality driling service	pcs pcs pcs	cut mill dril	profil/diffuser profil profil	extra service (option) extra service (option) extra service (option)
 PREMIUM LINE PROFILES EPOXY2, 26.6x23mm, with 95% efficiency light reflector, efficiency is +20% !with the sides reflectors	AL-EP2-2 AL-EP2-3 AL-EP2-6.1	new , EPOXY 2 aluminium LED profile, LED's dots free, suitable for PMMA diffuser new , EPOXY 2 aluminium LED profile, LED's dots free, suitable for PMMA diffuser new , EPOXY 2 aluminium LED profile, LED's dots free, suitable for PMMA diffuser	2m 3m 6.1m	anodized aluminum anodized aluminum anodized aluminum	silver silver silver	no diffuser, need to be chosen from below list, no diffuser, need to be chosen from below list, no diffuser, need to be chosen from below list,
	EC-EP2-H1	Aluminum end cap for EPOXY 2 led profile without cable hole	pcs	aluminum	silver	-
	AB-EP-K2 AB-EP-M2 AB-EP-K3 AB-EP-M3 AB-EP-K6.1 AB-EP-M6.1	PMMA diffuser for RSLW20 FL, Alu-Epoxy, EPOXY 2 LED profile PMMA diffuser for RSLW20 FL, Alu-Epoxy, EPOXY 2 LED profile PMMA diffuser for RSLW20 FL, Alu-Epoxy, EPOXY 2 LED profile PMMA diffuser for RSLW20 FL, Alu-Epoxy, EPOXY 2 LED profile PMMA diffuser for RSLW20 FL, Alu-Epoxy, EPOXY 2 LED profile PMMA diffuser for RSLW20 FL, Alu-Epoxy, EPOXY 2 LED profile	2m 2m 3m 3m 6.1m 6.1m	PMMA, UV-st. PMMA, UV-st. PMMA, UV-st. PMMA, UV-st. PMMA, UV-st. PMMA, UV-st.	clear frosted/opal clear frosted/opal clear frosted/opal	PMMA diffuser, certiyed UV stabilized material PMMA diffuser, certiyed UV stabilized material PMMA diffuser, certiyed UV stabilized material PMMA diffuser, certiyed UV stabilized material PMMA diffuser, certiyed UV stabilized material PMMA diffuser, certiyed UV stabilized material
	AL-REF-13-2 AL-REF-13-3	Light reflector Vega95 width 13mm for ALU-Round Ø52, Epoxy2 LED profile, length 1985mm Light reflector Vega95 width 13mm for ALU-Round Ø52, Epoxy2 LED profile, length 2985mm	1,98m 2,98m	reflector Vega 95 reflector Vega 95	reflector reflector	light reflector (need 2x), increase the profile efficiency by 20% light reflector (need 2x), increase the profile efficiency by 20%
	LC-LIN 90LC-HOR 90LC-VER	Linear connector 90° degree horizontal connector 90° degree vertical connector	pcs pcs pcs	galvanized steel galvanized steel galvanized steel	black black black	- - -
	CUT-1 MIL-1 DRIL-1	Quality 45/90/125 degree cut service Quality milling service Quality driling service	pcs pcs pcs	cut mill dril	profil/diffuser profil profil	extra service (option) extra service (option) extra service (option)

Item	Product code	Description	Dimmension	Material	Color	diffuser/lens type
 ASYMETRIC, 30,6x22mm	AL-ASY-2	Alu-Asymetric LED profile	2m	anodized aluminum	silver	no optic lens, needs to be chosen from below list,
	AL-ASY-6.1	Alu-Asymetric LED profile	6,1m	anodized aluminum	silver	no optic lens, needs to be chosen from below list,
	EC-ASY-L	Aluminum end caps for Alu-Asymetric LED profile, left	pcs	aluminum	silver	-
	EC-ASY-R	Aluminum end caps for Alu-Asymetric LED profile, right	pcs	aluminum	silver	-
	AB-LASY-K2	Asymetric optic lens for Alu-Asymetric LED profile	2,02m	PMMA, UV st.	clear	optic lens, certiyed UV stabilized material
	AB-LASY-M2	Asymetric optic lens for Alu-Asymetric LED profile	2,02m	PMMA satin, UV-st.	frosted/opal	optic lens, certified UV stabilized material
	AB-LASY-K6.1	Asymetric optic lens for Alu-Asymetric LED profile	6,1m	PMMA, UV st.	clear	optic lens, certified UV stabilized material
	AB-LASY-M6.1	Asymetric optic lens for Alu-Asymetric LED profile	6,1m	PMMA satin, UV-st.	frosted/opal	optic lens, certified UV stabilized material
	CUT-1	Quality 45/90/125 degree cut service	pcs	cut	profil/diffuser	extra service (option)
	MIL-1	Quality milling service	pcs	mill	profil	extra service (option)
	DRIL-1	Quality drilling service	pcs	dril	profil	extra service (option)
 EPOXY, 17,6x24,2mm	AL-EPOXY-2	Alu-Epoxy LED profile, to fill up with epoxy raisen or with PMMA diffuser	2m	anodized aluminum	silver	no diffusers, needs to be chosen from below list,
	AL-EPOXY-B-2	Alu-Epoxy LED profile, to fill up with epoxy raisen or with PMMA diffuser	2m	anodized aluminum	black	no diffusers, needs to be chosen from below list,
	AL-EPOXY-6.1	Alu-Epoxy LED profile, to fill up with epoxy raisen or with PMMA diffuser	6,1m	anodized aluminum	silver	no diffusers, needs to be chosen from below list,
	AL-EPOXY-B-6.1	Alu-Epoxy LED profile, to fill up with epoxy raisen or with PMMA diffuser	6,1m	anodized aluminum	black	no diffusers, needs to be chosen from below list,
	EC-EP-RESIN-H1	Aluminum end cap for Alu-Epoxy for resin, w/out cable hole	pcs	aluminum	silver/black	-
	EC-EP-PMMA-H1	Aluminum end cap for Alu-Epoxy for PMMA diffuser, w/out cable hole	pcs	aluminum	silver/black	-
	AB-EP-K2	PMMA diffuser for RSLW20 FL, Alu-Epoxy, EPOXY 2 LED profile	2m	PMMA, UV-st.	clear	PMMA diffuser, certiyed UV stabilized material
	AB-EP-M2	PMMA diffuser for RSLW20 FL, Alu-Epoxy, EPOXY 2 LED profile	2m	PMMA, UV-st.	frosted/opal	PMMA diffuser, certified UV stabilized material
	AB-EP-K3	PMMA diffuser for RSLW20 FL, Alu-Epoxy, EPOXY 2 LED profile	3m	PMMA, UV-st.	clear	PMMA diffuser, certified UV stabilized material
	AB-EP-M3	PMMA diffuser for RSLW20 FL, Alu-Epoxy, EPOXY 2 LED profile	3m	PMMA, UV-st.	frosted/opal	PMMA diffuser, certified UV stabilized material
	AB-EP-K6.1	PMMA diffuser for RSLW20 FL, Alu-Epoxy, EPOXY 2 LED profile	6.1m	PMMA, UV-st.	clear	PMMA diffuser, certified UV stabilized material
	AB-EP-M6.1	PMMA diffuser for RSLW20 FL, Alu-Epoxy, EPOXY 2 LED profile	6.1m	PMMA, UV-st.	frosted/opal	PMMA diffuser, certified UV stabilized material
	MC-CAB-1,6	Steel suspension cable 1,6m long with anchor, set of two	set of two	aluminum/steel	silver	-
	COLOUR-CAB-1,6	new, Cooled textil cable 2x075mm2, length 1,6m	pcs	cable	colour	=
	CUT-1	Quality 45/90/125 degree cut service	pcs	cut	profil/diffuser	extra service (option)
	MIL-1	Quality milling service	pcs	mill	profil	extra service (option)
	DRIL-1	Quality drilling service	pcs	dril	profil	extra service (option)
 PLW116, 73,5x116mm, FITS IN STANDARD POWER SUPPLY 21X31mm	AL-PLW116-2	Power Line Wide 116 (PLW116), anodized in silver aluminum LED profile 2,55kg/m	2m	anodized aluminum	silver	no diffuser, need to be chosen from below list,
	EC-PLW116	Aluminum end cap for PLW116 LED profile w/out cable hole	pcs	aluminum	silver	-
	LC-PLW116	Alumnium linear connector for PLW116 LED profile	pcs	aluminum	silver	-
	78-DURIS-WW	Triple row constant voltage Rigid FR-4 with Osram Duris E5 LEDs, 24V, CC driver on board, 17,4W, 3pcs/m	1 pcs	Osram Duris E5	2700°K	POWERED BY  LED CHIPS
	78-DURIS-NW	Triple row constant voltage Rigid FR-4 with Osram Duris E5 LEDs, 24V, CC driver on board, 17,4W, 3pcs/m	1 pcs	Osram Duris E5	4000°K	
	78-DURIS-CW	Triple row constant voltage Rigid FR-4 with Osram Duris E5 LEDs, 24V, CC driver on board, 17,4W, 3pcs/m	1 pcs	Osram Duris E5	5000°K	
	CUT-1	Quality 45/90/125 degree cut service	pcs	cut	profil/diffuser	extra service (option)
	MIL-1	Quality milling service	pcs	mill	profil	extra service (option)
	DRIL-1	Quality drilling service	pcs	dril	profil	extra service (option)
 RPLW116, 30x138mm	AL-RPLW116-2	160 degree light distribution RPLW116, anodized in silver, aluminum led profile	2m	aluminum	silver	no diffuser, need to be chosen from below list,
	AL-RPLW116-3	160 degree light distribution RPLW116, anodized in silver, aluminum led profile	3m	aluminum	silver	no diffuser, need to be chosen from below list,
	AL-RPLW116-6.1	160 degree light distribution RPLW116, anodized in silver, aluminum led profile	6.1m	aluminum	silver	no diffuser, need to be chosen from below list,
	EC-RPLW116	Aluminum end cap for RPLW116 LED profile w/out cable hole	pcs	aluminum	silver	-
	LC-RPLW116	Aluminum linear connector for RPLW116 LED profile	pcs	aluminum	silver	-
	MC-RPLW116	Mounting bracket for gypsum ceiling installation for Recess PowerLine Wide 116mm LED profile	pcs	galvanized steel	silver	-
	17-DURIS-WW	Double row constant voltage Rigid FR-4 with Osram Duris E5 LEDs, 24V, CC driver on board, 11,6W, 3pcs/m	1pcs	Osram Duris E5	2700°K	POWERED BY  LED CHIPS
	17-DURIS-NW	Double row constant voltage Rigid FR-4 with Osram Duris E5 LEDs, 24V, CC driver on board, 11,6W, 3pcs/m	1pcs	Osram Duris E5	4000°K	
	17-DURIS-CW	Double row constant voltage Rigid FR-4 with Osram Duris E5 LEDs, 24V, CC driver on board, 11,6W, 3pcs/m	1pcs	Osram Duris E5	5000°K	
	CUT-1	Quality 45/90/125 degree cut service	pcs	cut	profil/diffuser	extra service (option)
	MIL-1	Quality milling service	pcs	mill	profil	extra service (option)
	DRIL-1	Quality drilling service	pcs	dril	profil	extra service (option)

Item	Product code	Description	Dimmension	Material	Color	diffuser/lens type
 SPLW116, 41x116mm	AL-SPLW116-2 AL-SPLW116-3 AL-SPLW116-6.1	PLW 116mm smooth LEDs DOT's FREE LED profile PLW 116mm smooth LEDs DOT's FREE LED profile PLW 116mm smooth LEDs DOT's FREE LED profile <i>for future customer customize length cut</i>	2m 3m 6,1m	anodized aluminum anodized aluminum anodized aluminum	silver silver silver	no diffuser, need to be chosen from below list, no diffuser, need to be chosen from below list, no diffuser, need to be chosen from below list,
	EC-SPLW116	Aluminum end cap for SPLW116 LED profile w/out cable hole	pcs	aluminum	silver	-
	LC-LIN	Linear connector	pcs	galvanized steel	silver	-
	90LC-HOR	90° degree horizontal connector	pcs	galvanized steel	silver	-
	90LC-VER	90° degree vertical connector	pcs	galvanized steel	silver	-
	MC-SPLW116	Gypsum ceiling Trimless installation mounting bracket for PL55 led profile	pcs	galvanized steel	silver	gypsum ceiling trimless installation accessories
	MC-SPLW116-MAG	Gypsum ceiling Trimless installation magnetic mounting bracket (set) for PL55 led profile	set	galvanized steel	silver	incl. magnetic pads (2), mounting bracket(1), security cable(1)
	MC-LOCK	Security steel cable with lock for trimless installed mounting brackets	pcs	steel cable	silver	security cable (1) attached to the bracket
	MC-KEY-SPLW116	Positioning key for trimless base installation for PL55 led profile	pcs	galvanized steel	silver	tool to positioning the installation base, need at list 2 per m
	MC-CAB-1,6	Steel suspension cable 2m long with anchor, set of two	set	aluminum/steel	silver	set of two
	78-DURIS-WW	Triple row constant voltage Rigid FR-4 with Osram Duris E5 LEDs, 24V, CC driver on board, 17,4W, 3pcs/m	1 pcs	Osram Duris E5	2700°K	POWERED BY  LED CHIPS
	78-DURIS-NW	Triple row constant voltage Rigid FR-4 with Osram Duris E5 LEDs, 24V, CC driver on board, 17,4W, 3pcs/m	1 pcs	Osram Duris E5	4000°K	
	78-DURIS-CW	Triple row constant voltage Rigid FR-4 with Osram Duris E5 LEDs, 24V, CC driver on board, 17,4W, 3pcs/m	1 pcs	Osram Duris E5	5000°K	
	CUT-1	Quality 45/90/125 degree cut service	pcs	cut	profil/diffuser	extra service (option)
	MIL-1	Quality milling service	pcs	mill	profil	extra service (option)
	DRIL-1	Quality drilling service	pcs	dril	profil	extra service (option)
 Diffuser	AB-PLW116-K2	Diffuser for PLW116, RPLW116mm, PLW116 smooth series LED profiles	2m	polycarbonate UV-st.	clear	diffuser, certyfied UV stabilized material
	AB-PLW116-M2	Diffuser for PLW116, RPLW116mm, PLW116 smooth series LED profiles	2m	polycarbonate UV-st.	frosted/opal	diffuser, certyfied UV stabilized material
	AB-PLW116-K3	Diffuser for PLW116, RPLW116mm, PLW116 smooth series LED profiles	3m	polycarbonate UV-st.	clear	diffuser, certyfied UV stabilized material
	AB-PLW116-M3	Diffuser for PLW116, RPLW116mm, PLW116 smooth series LED profiles	3m	polycarbonate UV-st.	frosted/opal	diffuser, certyfied UV stabilized material
	AB-PLW116-M6.1	Diffuser for PLW116, RPLW116mm, PLW116 smooth series LED profiles	6,1m	polycarbonate UV-st.	frosted/opal	diffuser, certyfied UV stabilized material
 SWISS 20, 20x24,7mm	AL-SS20-2 AL-SS20-3 AL-SS20-6.1	Surface, trimless, pendant installed SWISS 20 aluminum led profile Surface, trimless, pendant installed SWISS 20 aluminum led profile Surface, trimless, pendant installed SWISS 20 aluminum led profile <i>for future customer customize length cut</i>	2m 3m 6,1m	anodized aluminum anodized aluminum anodized aluminum	silver silver silver	no diffusers, needs to be chosen from below list, no diffusers, needs to be chosen from below list, no diffusers, needs to be chosen from below list,
	LC-LIN	Linear connector	pcs	galvanized steel	silver	-
	90LC-HOR	90° degree horizontal connector	pcs	galvanized steel	silver	-
	90LC-VER	90° degree vertical connector	pcs	galvanized steel	silver	-
	EC-SS20-H1	Aluminum end caps for profile SWISS 20 without cable hole	pcs	aluminum	silver	-
	MC-SS-BAS-2	Fixation base forAlu-Swiss, Alu-Swiss 20 LED profile	2m	polycarbonate	grey	-
	MC-SS-BAS-3	Fixation base forAlu-Swiss, Alu-Swiss 20 LED profile	3m	polycarbonate	grey	-
	MC-SS20	Gypsum ceiling Trimless installation mounting bracket for SS20 led profile	pcs	galvanized steel	silver	gypsum ceiling trimless installation accessories
	MC-SS20-MAG	Gypsum ceiling Trimless installation magnetic mounting bracket (SET) for SS20 led profile	set	galvanized steel	silver	incl. magnetic pads (1), mounting bracket(1), security cable(1)
	MC-LOCK	Security steel cable with lock for trimless installed mounting brackets	pcs	steel cable	silver	security cable (1) attached to the bracket
	MC-KEY-SS20	Positioning key for trimless base installation for SS20 led profile	pcs	galvanized steel	silver	tool to positioning the installation base, need at list two per m
	MC-CAB-1,6	Steel suspension cable 2m long with anchor, set of two	set	aluminum/steel	silver	set of two
	AB-SS20-K2	walk over safe diffuser for ALU-SWISS 20 LED profile	2m	polycarbonate UV-st.	clear	diffuser, certyfied UV stabilized material
	AB-SS20-K3	walk over safe diffuser for ALU-SWISS 20 LED profile	3m	polycarbonate UV-st.	clear	diffuser, certyfied UV stabilized material
	AB-SS20-M2	walk over safe diffuser for ALU-SWISS 20 LED profile	2m	polycarbonate UV-st.	frosted/opal	diffuser, certyfied UV stabilized material
	AB-SS20-M3	walk over safe diffuser for ALU-SWISS 20 LED profile	3m	polycarbonate UV-st.	frosted/opal	diffuser, certyfied UV stabilized material
	AB-SS20-M6.1	<i>new</i> , walk over safe diffuser for ALU-SWISS 20 LED profile	6,1m	polycarbonate UV-st.	frosted/opal	diffuser, certyfied UV stabilized material
	CUT-1	Quality 45/90/125 degree cut service	pcs	cut	profil/diffuser	extra service (option)
	MIL-1	Quality milling service	pcs	mill	profil	extra service (option)
	DRIL-1	Quality drilling service	pcs	dril	profil	extra service (option)
 STAIR NANO, 30,8x25,5mm	AL-STN-2 AL-STN-3	ALU-STAIR NANO, smallest ever LED stair profile, anodized, with light up and down ALU-STAIR NANO, smallest ever LED stair profile, anodized, with light up and down	2m 3m	anodized aluminum anodized aluminum	silver silver	no diffuser, need to be chosen from below list, price reduction of -17%  no diffuser, need to be chosen from below list, price reduction of -17% 
	EC-STN-L	Aluminum end caps for ALU-STAIR NANO LED profile, left	pcs	aluminum	silver	-
	EC-STN-R	Aluminum end caps for ALU-STAIR NANO LED profile, right	pcs	aluminum	silver	-
	RU-PLUG	Silicone screw hiding plug, 5cm long for future cut	pcs	silicone	grey	-
	AB-SS-K2	Diffuser for Alu-Swiss profile,	2m	polycarbonate UV-st.	clear/transparent	diffuser, certyfied UV stabilized material
	AB-SS-M2	Diffuser for Alu-Swiss profile,	2m	polycarbonate UV-st.	frosted/opal	diffuser, certyfied UV stabilized material
	AB-SS-K3	Diffuser for Alu-Swiss profile,	3m	polycarbonate UV-st.	clear/transparent	diffuser, certyfied UV stabilized material
	AB-SS-M3	Diffuser for Alu-Swiss profile,	3m	polycarbonate UV-st.	frosted/opal	diffuser, certyfied UV stabilized material
	CUT-1	Quality 45/90/125 degree cut service	pcs	cut	profil/diffuser	extra service (option)
	MIL-1	Quality milling service	pcs	mill	profil	extra service (option)
	DRIL-1	Quality drilling service	pcs	dril	profil	extra service (option)
 NANO LINE, 6x14mm	AL-NL-2 AL-NL-3 AL-NL-6.1	Nano Line (6x14mm) is the smallest linear profile, anodized Nano Line (6x14mm) is the smallest linear profile, anodized Nano Line (6x14mm) is the smallest linear profile, anodized	2m 3m 6.1m	anodized aluminum anodized aluminum anodized aluminum	silver silver silver	no diffuser, need to be chosen from below list, no diffuser, need to be chosen from below list, no diffuser, need to be chosen from below list,
	AB-SIL-M1	Silicon, UV stabilized opal diffuser, in sale per meter	1m	silicone	frosted/opal	silicon diffuser, UV stabilized material
	EC-NL-H3L	Aluminum end cap for Nano Line, without cable hole (left)	pcs	aluminum	silver	-
	EC-NL-H3R	Aluminum end cap for Nano Line, without cable hole (right)	pcs	aluminum	silver	-
	EC-NL-H4R	Aluminum end cap for Nano Line, with cable hole (right)	pcs	aluminum	silver	-
	CUT-1	Quality 45/90/125 degree cut service	pcs	cut	profil/diffuser	extra service (option)
	MIL-1	Quality milling service	pcs	mill	profil	extra service (option)
	DRIL-1	Quality drilling service	pcs	dril	profil	extra service (option)

Item	Product code	Description	Dimmension	Material	Color	diffuser/lens type
 Drive Way profile, 32x28,5mm, 30Kn/IK10						
	AL-DR-6.1	DRIVEWAY Led profile dedicated for resin encapsulation, anodized, 30Kn, IK10 (after encapsulation, hard finish), for future customer custimize length cut	6,1m	anodized aluminum	silver	empty aluminum profile, encapsulation cost not included,
	EC-DR	Aluminum end caps for DRIVE WAY LED profile, without cable hole	pcs	aluminum	silver	-
	CUT-1	Quality 45/90/125 degree cut service	pcs	cut	profil/diffuser	extra service (option)
	MIL-1	Quality milling service	pcs	mill	profil	extra service (option)
	DRIL-1	Quality drilling service	pcs	dril	profil	extra service (option)
 Drive Way base profile, 21X31mm Fit's standard Iprated power supplier						
 PL65, 35x65mm for Florence lens or LEDsON standard diffuser. FITS IN STANDARD POWER SUPPLY 21X31mm	AL-PL65-6.1	High performance PL65 led profile up to 40W/m of heat dissipation capability for surface/susend installation, for future customer custimize length cut	6,1m	anodized aluminum	silver	no diffuser, need to be choice from the below list, price reduction of -15%!
	EC-PL65-H3	Laser cut aluminum, anodized end cup for PL65, without cable hole	pcs	anodized aluminum	silver	-
	MC-PL65	new, Mounting bracket for surface installation for PL65 led profile	pcs	galvanized steel	silver	-
	MC-CAB-1,6	Steel suspension cable 1,6m long with anchor, set of two	set	aluminum/steel	silver	set of two
	LC-LIN	Linear connector	pcs	galvanized steel	silver	-
	90LC-HOR	90° degree horizontal connector	pcs	galvanized steel	silver	-
	90LC-VER	90° degree vertical connector	pcs	galvanized steel	silver	-
	120LC-VER	120° degree vertical connector	pcs	galvanized steel	silver	-
	CUT-1	Quality 45/90/125 degree cut service	pcs	cut	profil/diffuser	extra service (option)
	MIL-1	Quality milling service	pcs	mill	profil	extra service (option)
	DRIL-1	Quality drilling service	pcs	dril	profil	extra service (option)
 Diffuser PL65	AB-PL65-50M2	Diffuser for PL65 LED profiles, 50% opal finish	2m	polycarbonate UV-st.	50% frosted/opal	diffuser, certyfied UV stabilized material
	AB-PL65-50M3	Diffuser for PL65 LED profiles, 50% opal finish	3m	polycarbonate UV-st.	50% frosted/opal	diffuser, certyfied UV stabilized material
	AB-PL65-50M6.1	Diffuser for PL65 LED profiles, 50% opal finish	6,1m	polycarbonate UV-st.	50% frosted/opal	diffuser, certyfied UV stabilized material
	AB-PL65-K6.1	Diffuser for PL65 LED profiles, transparent finish	6,1m	polycarbonate UV-st.	transparent	diffuser, certyfied UV stabilized material