


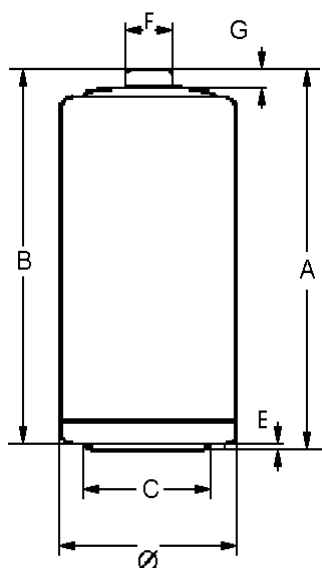

|                               |                                       |
|-------------------------------|---------------------------------------|
| Type Designation              | 4914                                  |
| Designation IEC               | LR14                                  |
| System                        | Zn-MnO <sub>2</sub> (Alkaline)        |
| Shelf Life (Coding)*          | 10 years                              |
| Nominal Voltage [V]           | 1.5                                   |
| Typical Capacity C [mAh]      | 7800 (discharge with high-resistance) |
| Permissible Temperature Range | - 10 °C ... 50 °C                     |
| Weight, approx. [g]           | 65,8                                  |
| Volume [ccm]                  | 26                                    |

Dimensions [mm] min: max:

|   |      |      |
|---|------|------|
| Ø | 24.9 | 26.2 |
| A | -    | 50.0 |
| B | 48.6 | -    |
| C | 13.0 | -    |
| E | -    | 0.9  |
| F | -    | 7.5  |
| G | 1.5  | -    |

### Typical Capacities (at 20°C)



| Discharge Type        | Load  | End Voltage[V] | 0.9   |
|-----------------------|-------|----------------|-------|
| 4M/15M, H, 8H/D, 7D/W | 3.9 Ω | Time [h]       | 22,2  |
| Portable lighting     |       | Capacity [Ah]  | 6,47  |
|                       |       | Energy [Wh]    | 7,43  |
| Discharge Type        | Load  | End Voltage[V] | 0.8   |
| 1H/D, 7D/W            | 3.9 Ω | Time [h]       | 25,1  |
| Toy                   |       | Capacity [Ah]  | 6,86  |
|                       |       | Energy [Wh]    | 7,40  |
| Discharge Type        | Load  | End Voltage[V] | 0.9   |
| 4H/D, 7D/W            | 20 Ω  | Time [h]       | 122,5 |
| Radio                 |       | Capacity [Ah]  | 7,48  |
|                       |       | Energy [Wh]    | 9,41  |

**No publication or circulation of data to third parties without consent of VARTA Consumer Batteries**

\* In consideration of typical loss of capacity at storage and application.